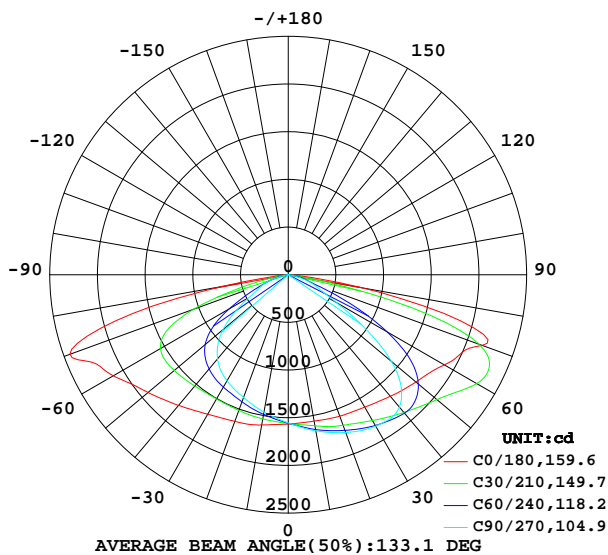
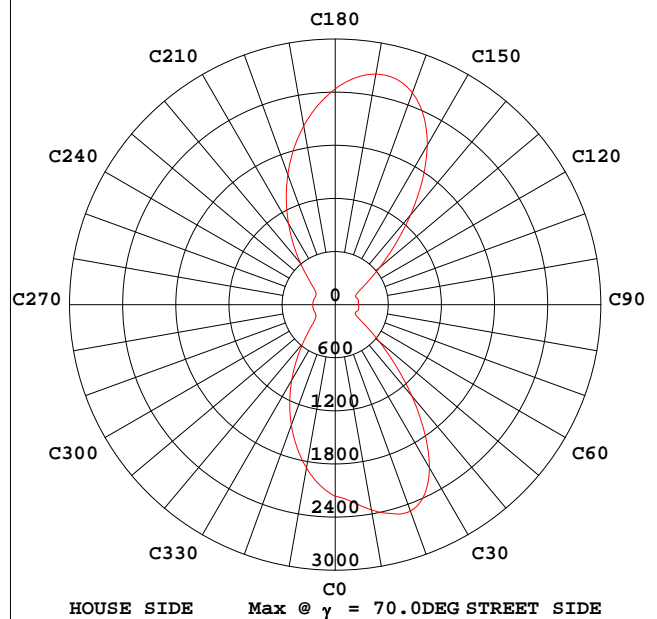


STREETLIGHT PHOTOMETRIC TEST REPORT

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.25 lm/W			
MODEL	ZGSM-LD55KS 3M	Imax(cd)	2640	η street_up(%)	0.0
NOMINAL POWER(W)	55	LOR(%)	100.2	η street_down(%)	57.7
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	6889	η house_up(%)	0.0
NOMINAL FLUX(lm)	6875	MAXIMUM @ (C, γ)	165,70.0	η house_down(%)	42.5
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	η down(%)	100.2	SLI	23.458


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANSMAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

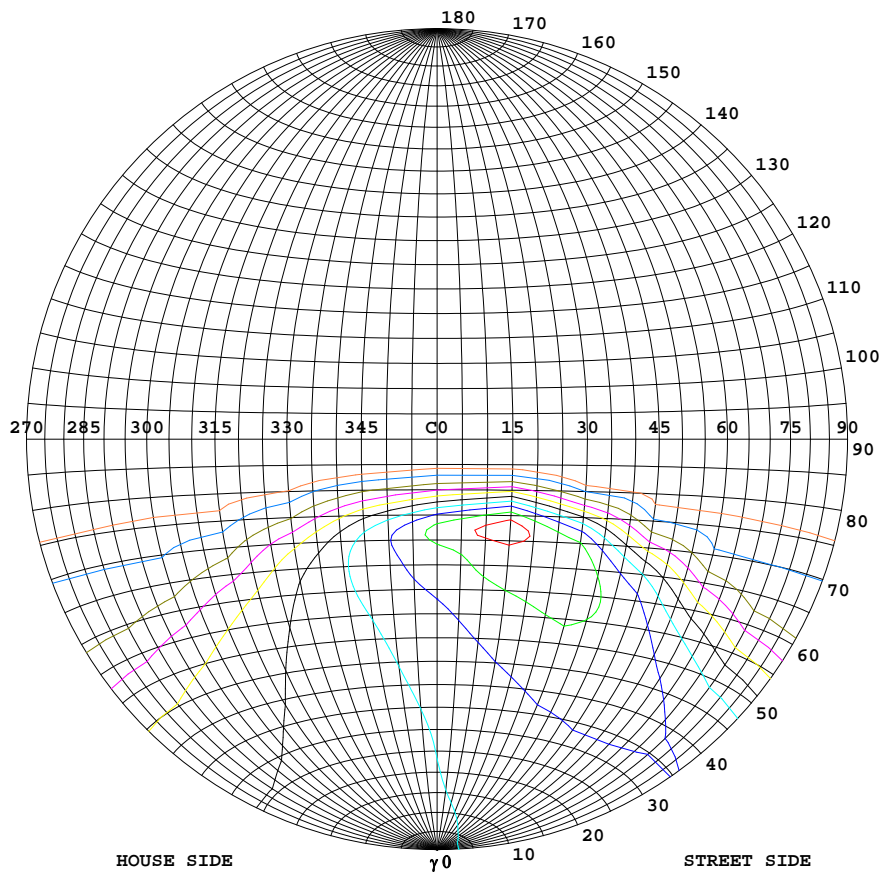



Classification:

IES:Type III - Medium
 CIE:Average - Long
 IES:Semi cut-off
 CIE:Non-cut-off
 Max.At80:143.4cd/klm
 Max.At90:0.8816cd/klm
 Max.80-90:143.4cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	2640
90%	2376
80%	2112
70%	1848
60%	1584
50%	1320
40%	1056
30%	792
20%	528
10%	264
5%	132

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

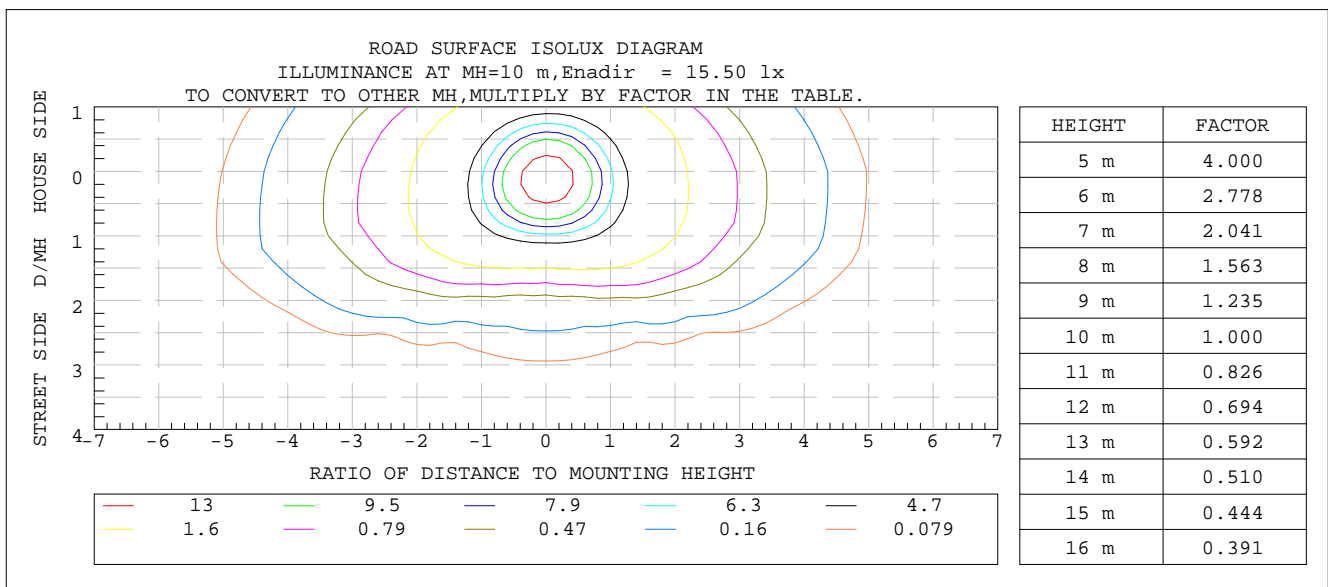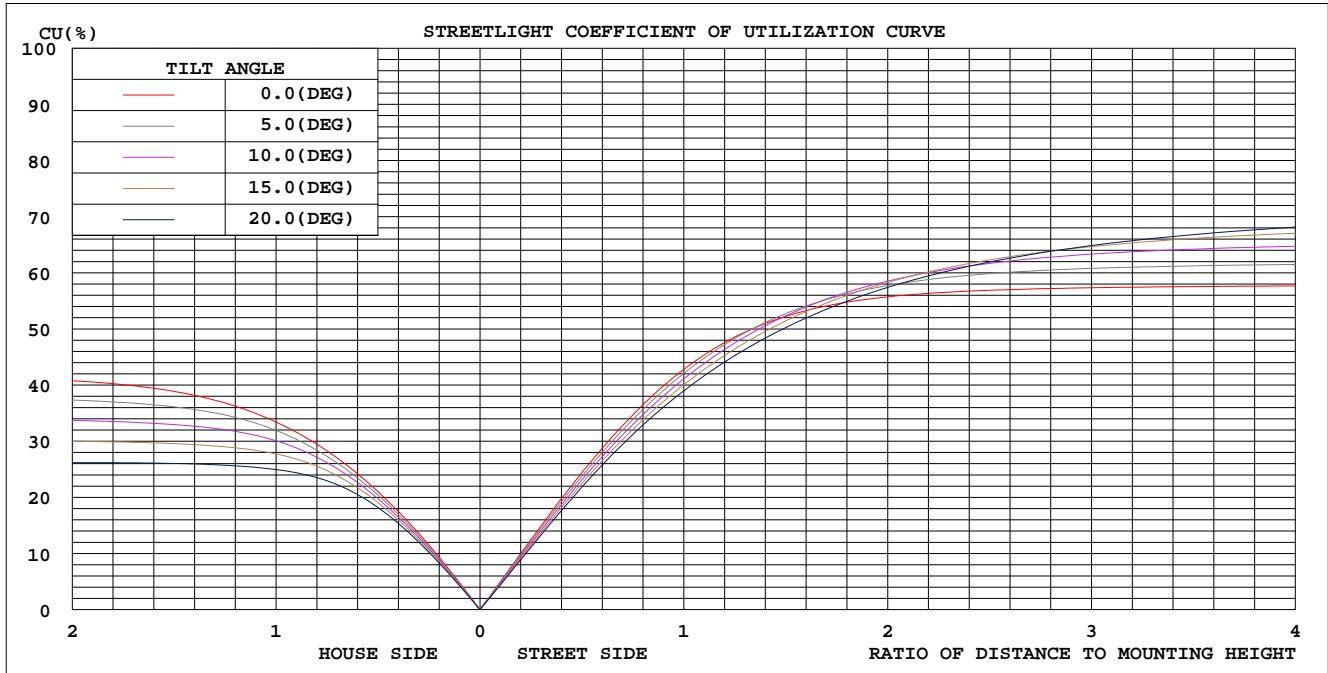COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	1559	1630	1662	1647	1600	1508	1463	1474	0- 10	148.9	148.9	2.16,2.17
20	1578	1712	1760	1742	1637	1462	1371	1411	10- 20	446.5	595.3	8.64,8.66
30	1603	1812	1833	1859	1689	1426	1285	1360	20- 30	737.3	1333	19.3,19.4
40	1664	1918	1813	1977	1788	1406	1154	1314	30- 40	1017	2349	34.1,34.2
50	1749	2036	1413	2104	1921	1352	892.3	1226	40- 50	1247	3597	52.2,52.3
60	1890	1911	578.0	1974	2119	1110	473.6	986.0	50- 60	1331	4928	71.5,71.7
70	2164	959.0	259.5	951.7	2436	447.2	253.7	424.7	60- 70	1200	6128	89,89.1
80	778.4	93.93	51.94	88.71	689.1	74.62	41.74	77.54	70- 80	703.5	6831	99.2,99.4
90	5.558	2.132	0.9509	1.889	6.041	3.796	1.306	3.839	80- 90	57.20	6889	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

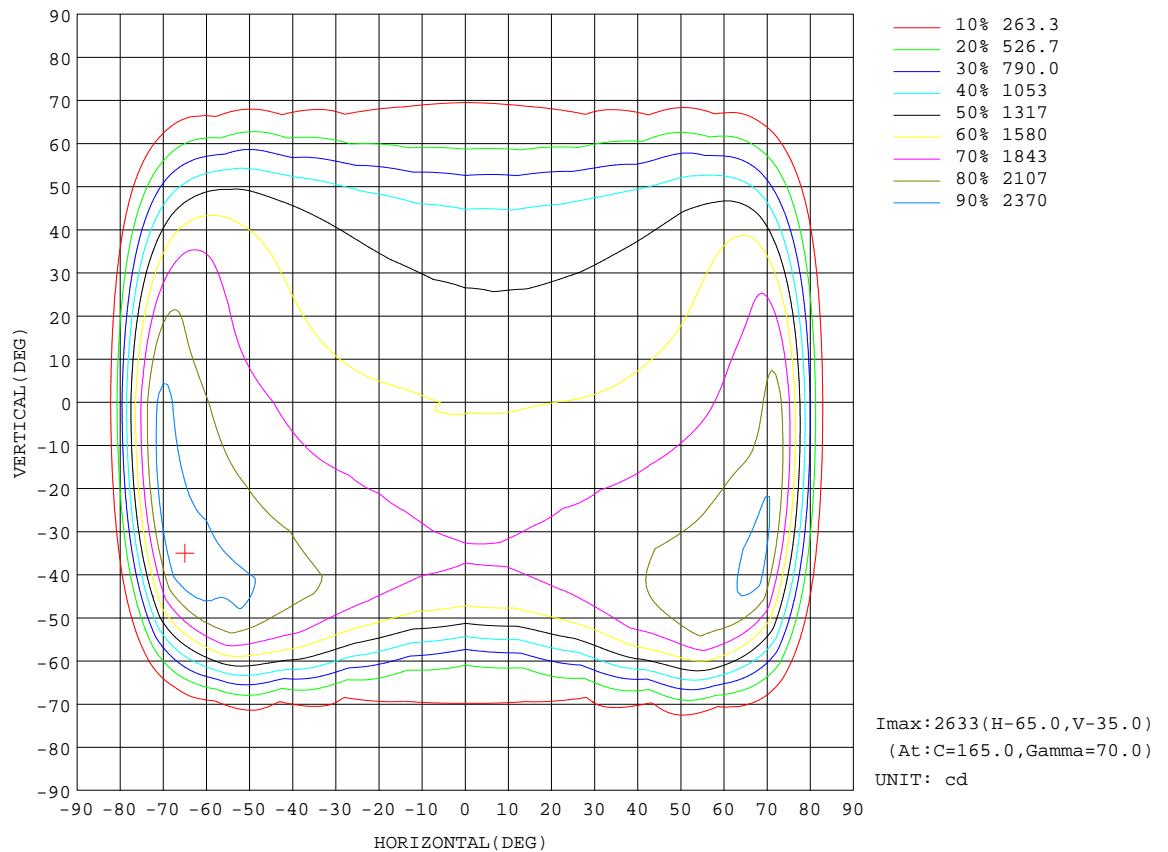

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

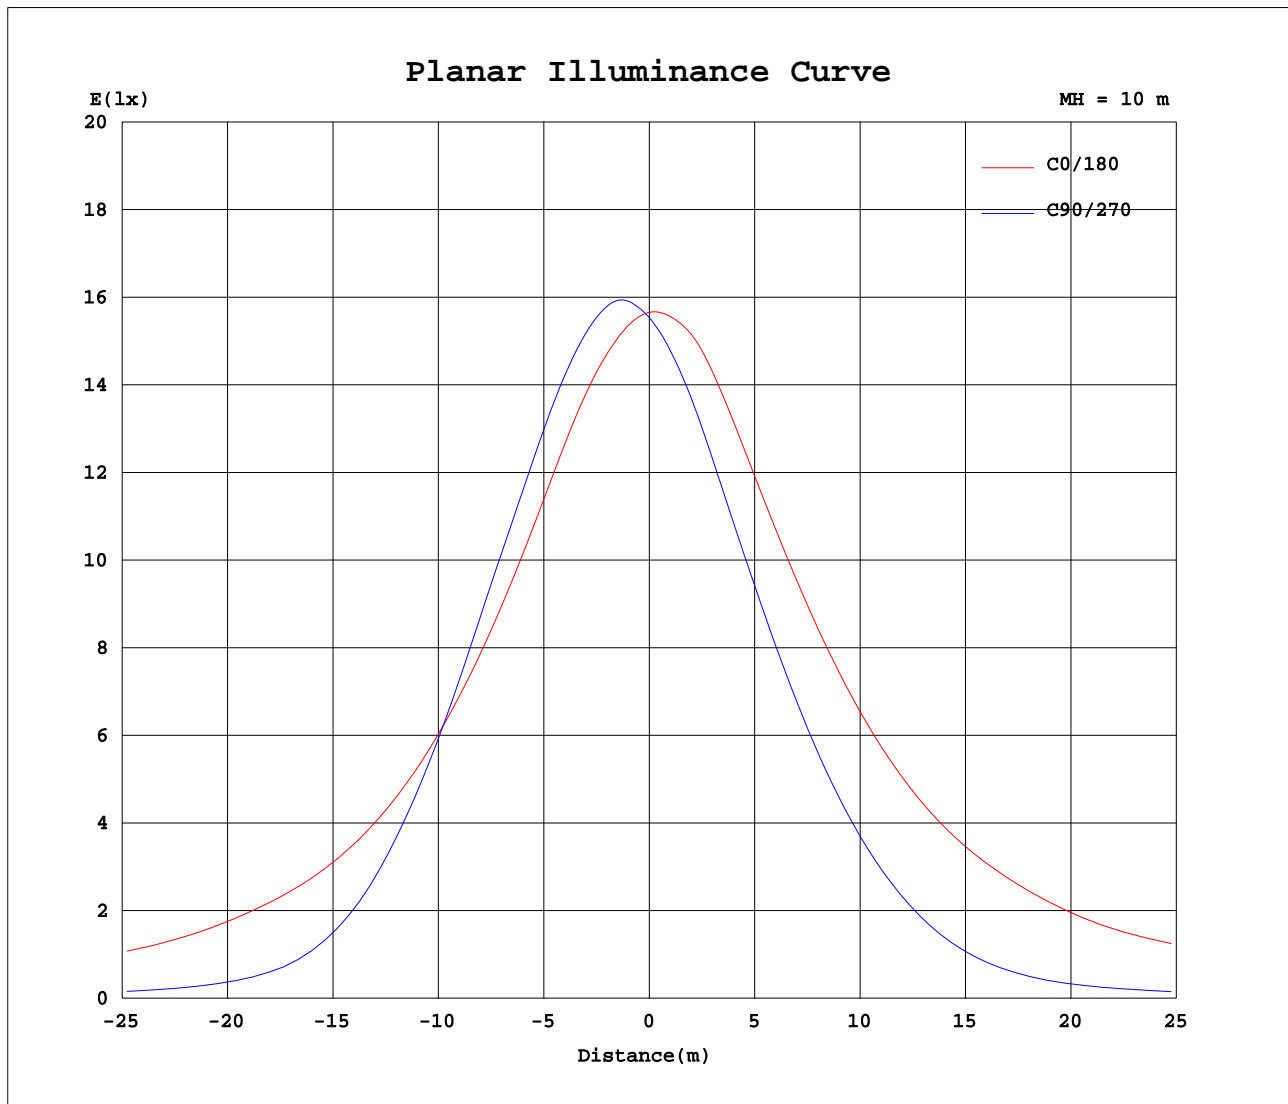


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

LCS REPORT

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

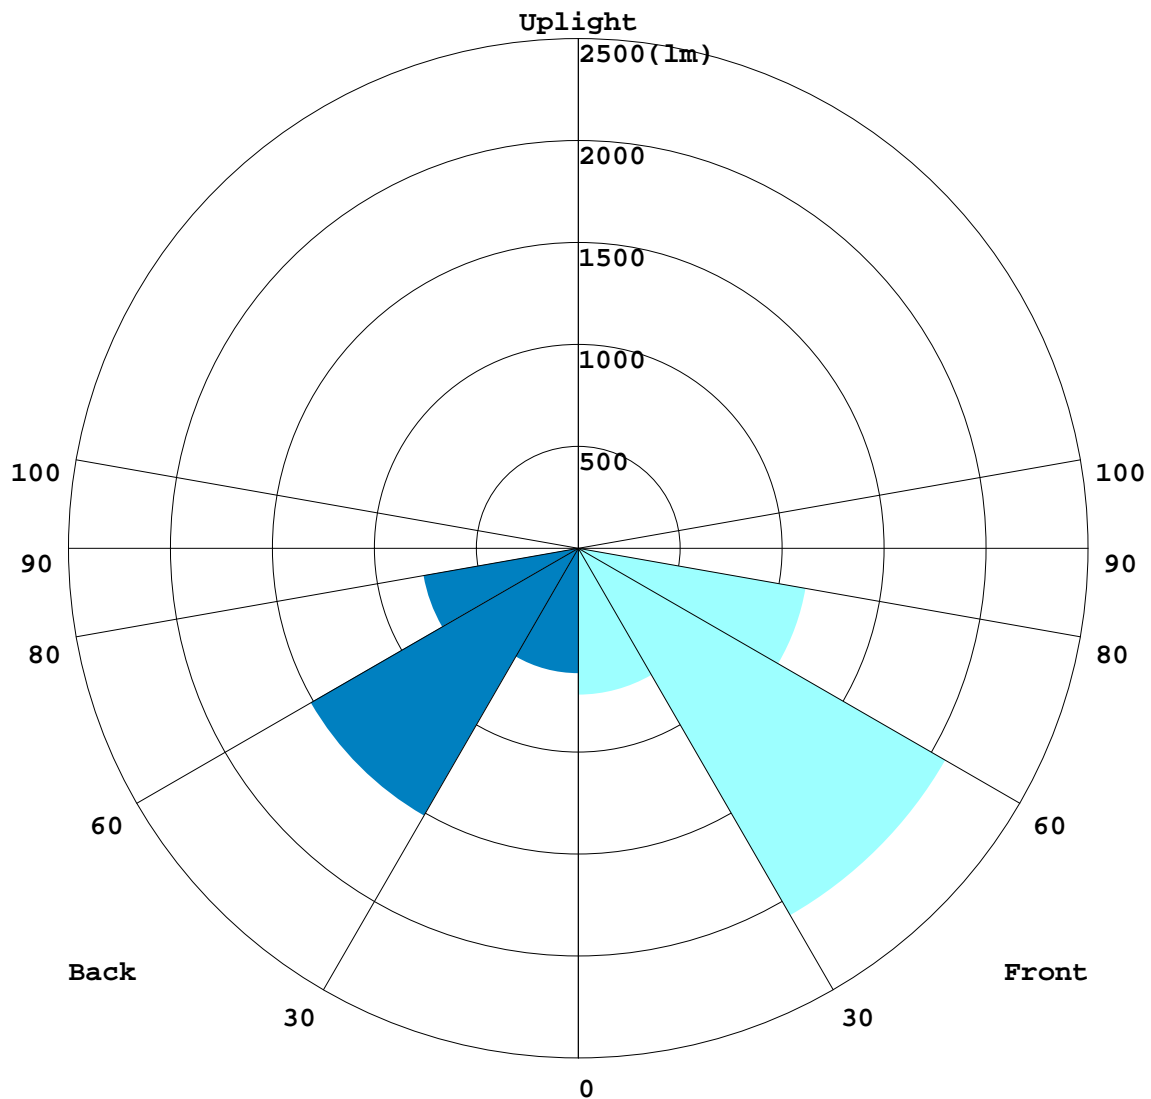

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

BUG REPORT

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	718.69	10.4
FM - Front-Medium(30-60)	2080	30.2
FH - Front-High(60-80)	1133.1	16.4
FVH - Front-Very High(80-90)	33.301	0.5
Total Forward Light	3965	57.6

BL - Back-Low(0-30)	613.9	8.9
BM - Back-Medium(30-60)	1515.1	22.0
BH - Back-High(60-80)	770.78	11.2
BVH - Back-Very High(80-90)	23.896	0.3
Total Back Light	2923.6	42.4

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B2-U0-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	2923.6	0	2923.6
Street Side	3965	0	3965


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

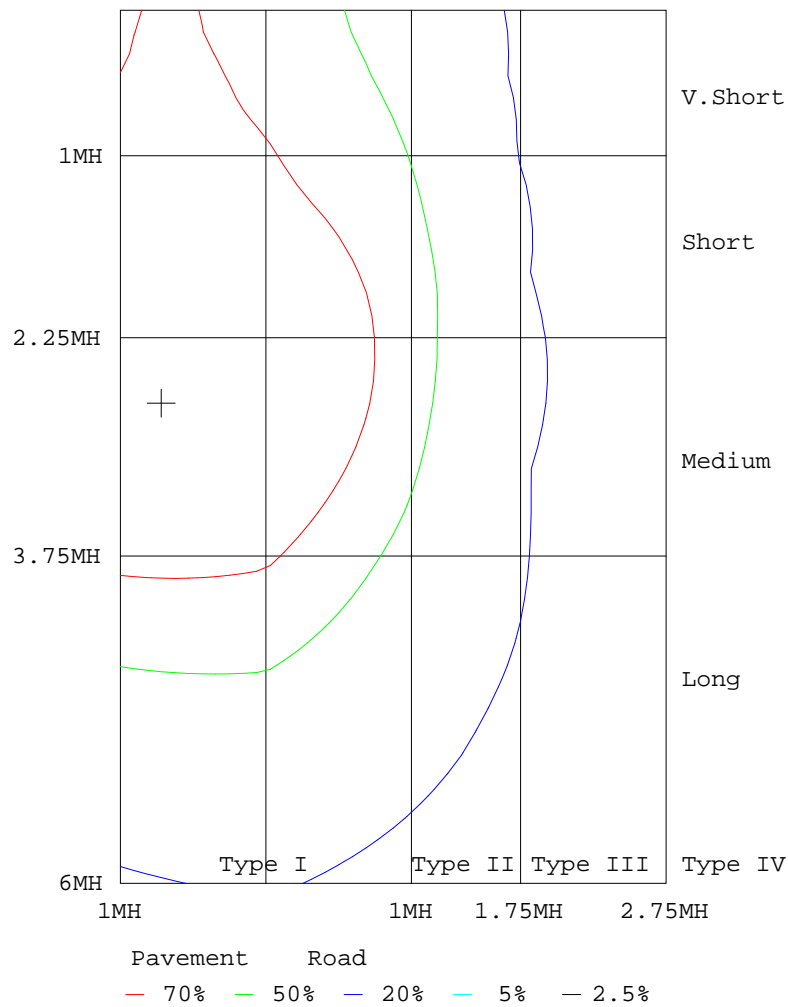

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

