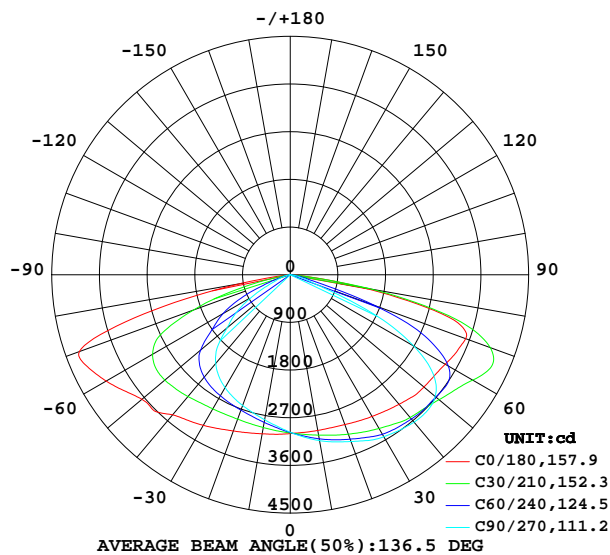
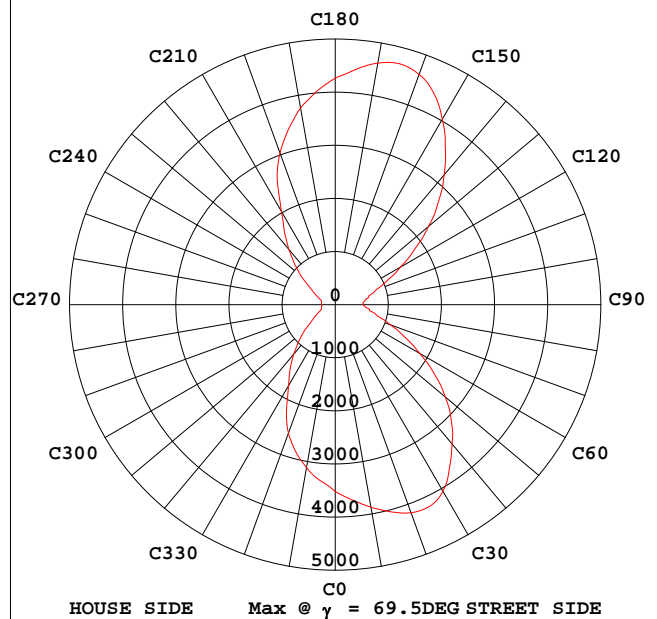


STREETLIGHT PHOTOMETRIC TEST REPORT

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 150.79 lm/W			
MODEL	ZGSM-LD90KM 5050 3M	Imax(cd)	4693	η street_up(%)	0.0
NOMINAL POWER(W)	90	LOR(%)	100.5	η street_down(%)	60.1
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	13571	η house_up(%)	0.0
NOMINAL FLUX(lm)	13500	MAXIMUM @ (C, γ)	165,69.5	η house_down(%)	40.4
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	η down(%)	100.5	SLI	24.178


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANSMAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG
C Interval: 2.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks: 5050 3M

STREETLIGHT ISOCANDELA DIAGRAM

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

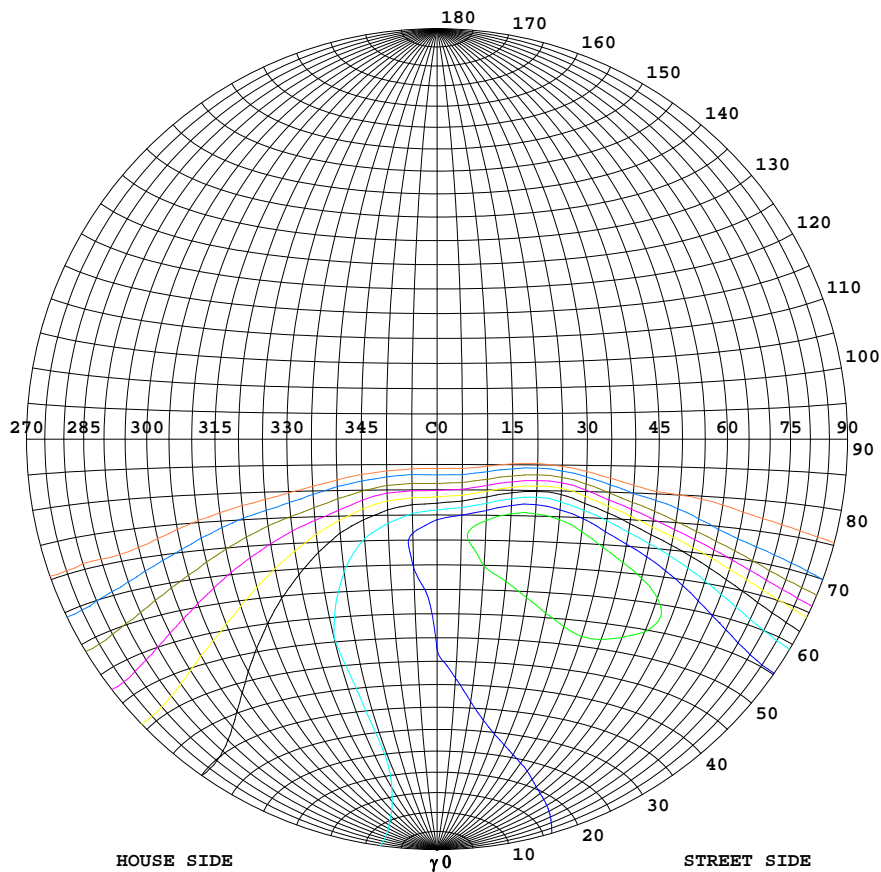

Classification:



IES:Type III - Medium
 CIE:Average - Intermediate
 IES:Semi cut-off
 CIE:Non-cut-off
 Max.At80:167.5cd/klm
 Max.At90:0.8133cd/klm
 Max.80-90:167.5cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	4693
90%	4224
80%	3755
70%	3285
60%	2816
50%	2347
40%	1877
30%	1408
20%	939
10%	469
5%	235

C Range: 0 - 360DEG
 C Interval: 2.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks: 5050 3M

COEFFICIENT OF UTILIZATION CURVE AND ISOLUX DIAGRAM

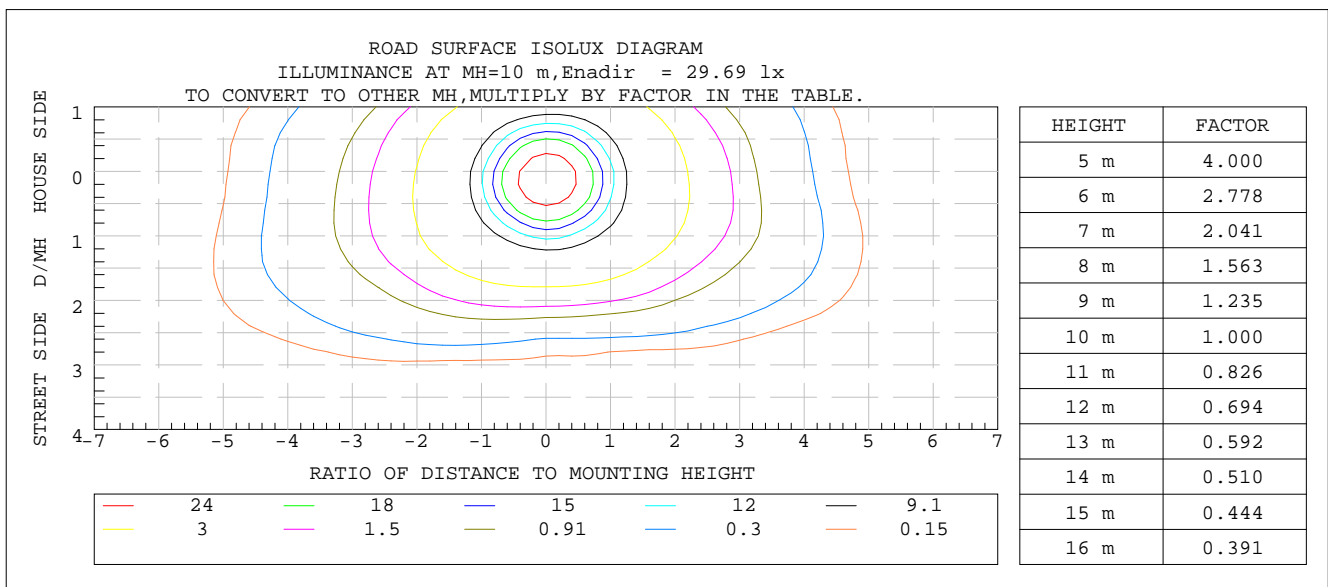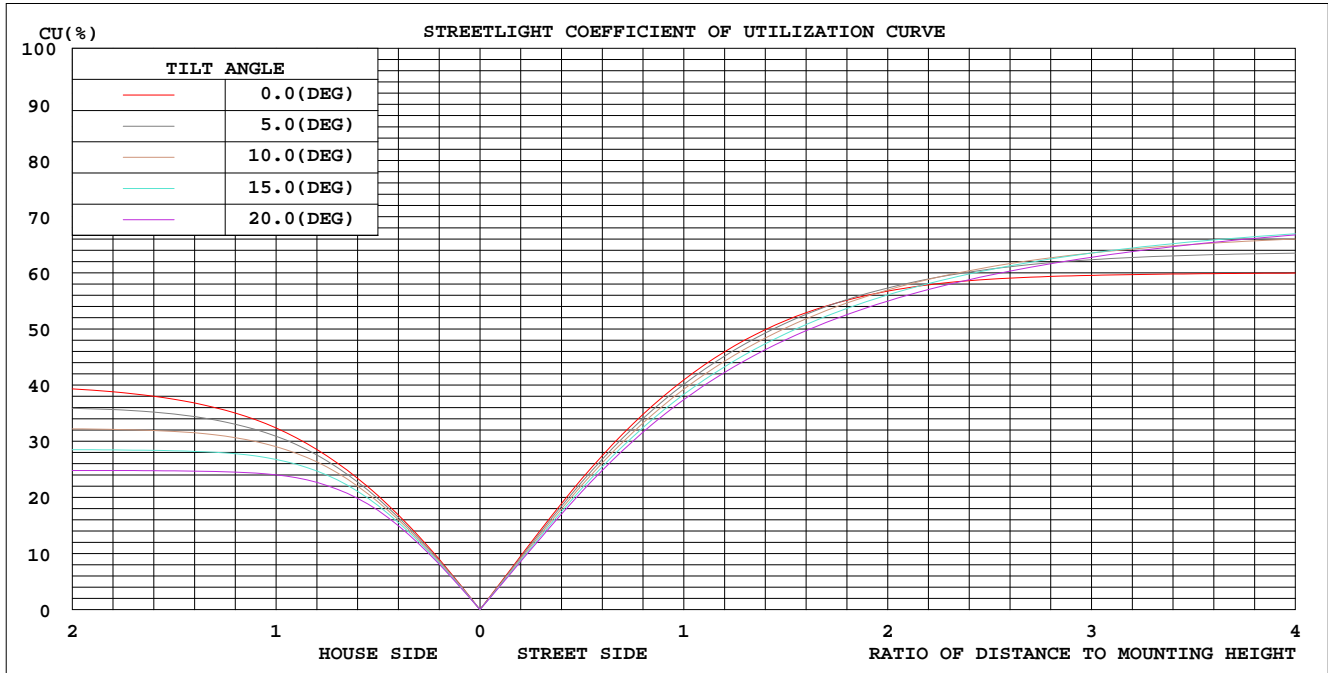

C Range: 0 - 360DEG
C Interval: 2.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks: 5050 3M

ZONAL FLUX DIAGRAM

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	2985	3113	3179	3150	3049	2875	2781	2815	0- 10	284.6	284.6	2.1,2.11
20	3010	3264	3350	3332	3138	2801	2627	2704	10- 20	852.1	1137	8.38,8.42
30	3089	3424	3531	3538	3283	2774	2460	2628	20- 30	1415	2551	18.8,18.9
40	3194	3546	3634	3720	3453	2783	2188	2549	30- 40	1953	4505	33.2,33.4
50	3296	3689	3572	3959	3659	2686	1553	2367	40- 50	2417	6921	51,51.3
60	3378	3920	2692	4068	4012	2090	836.6	1797	50- 60	2698	9619	70.9,71.3
70	3524	2993	464.2	2606	4234	1012	245.1	911.5	60- 70	2486	12106	89.2,89.7
80	1354	282.0	54.50	170.5	903.7	68.93	46.10	93.29	70- 80	1344	13450	99.1,99.6
90	10.03	6.669	1.817	3.756	10.39	8.531	3.955	8.165	80- 90	120.6	13571	100,101
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 2.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks: 5050 3M

ISOCANDELA DIAGRAM


NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

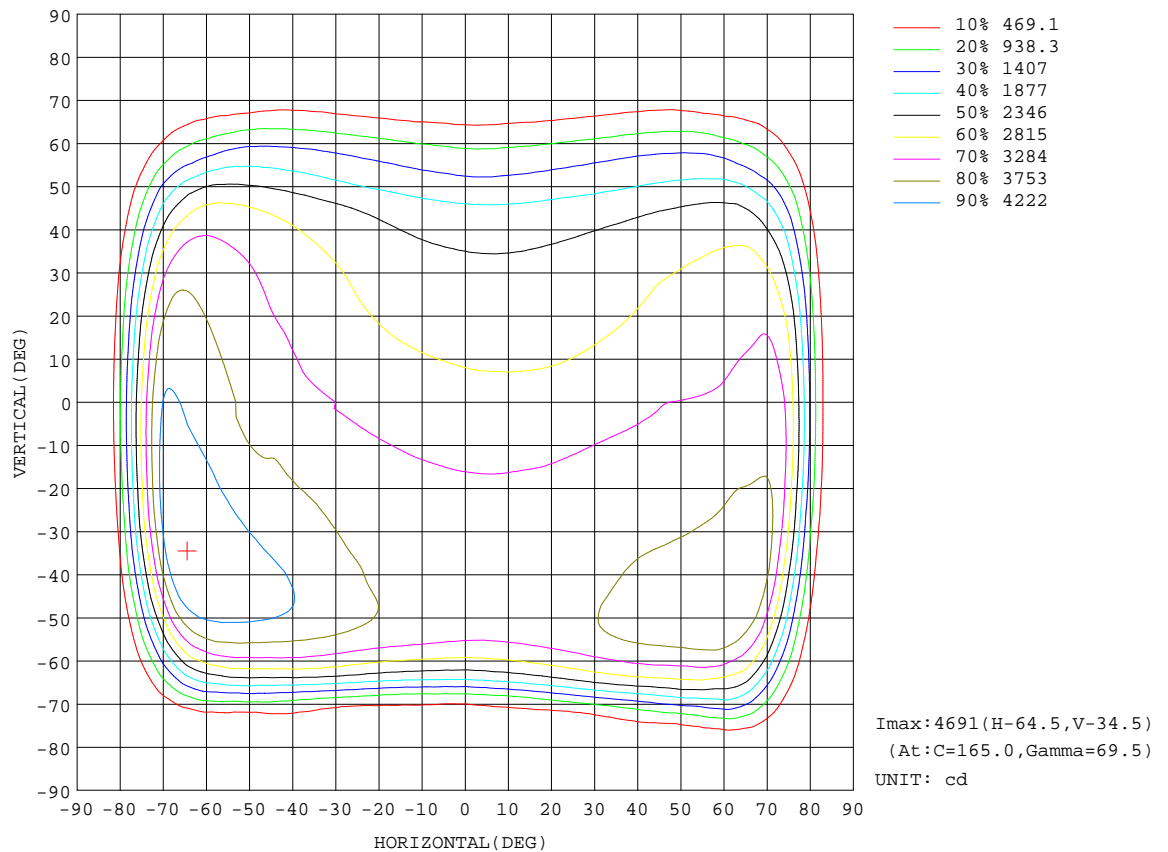

C Range: 0 - 360DEG
C Interval: 2.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks: 5050 3M

Planar Illuminance Curve

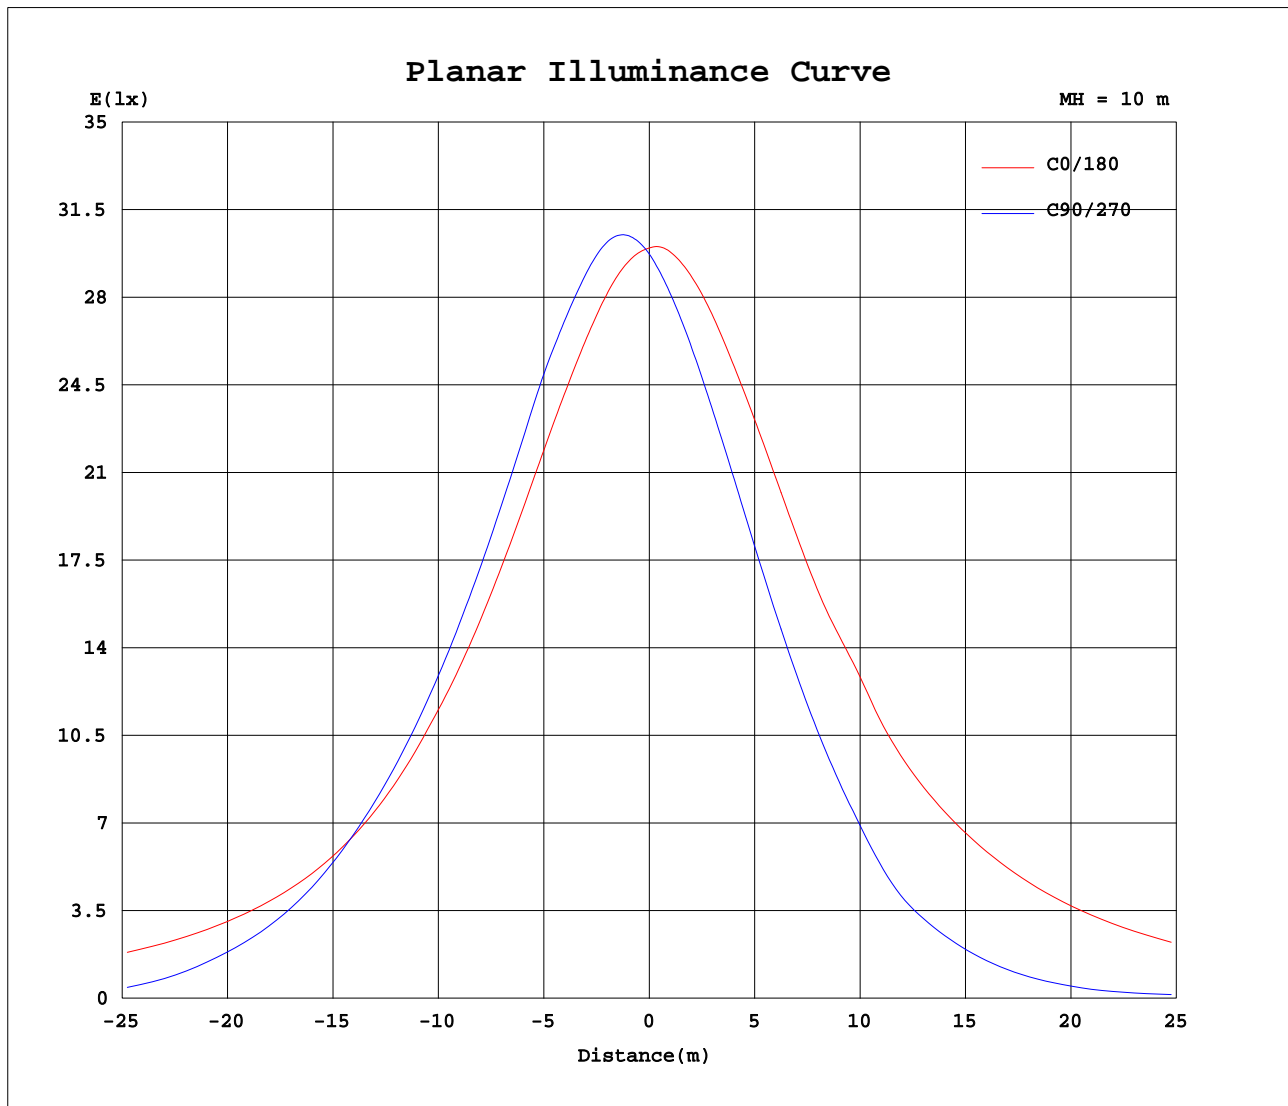


C Range: 0 - 360DEG
C Interval: 2.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks: 5050 3M

LCS REPORT

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

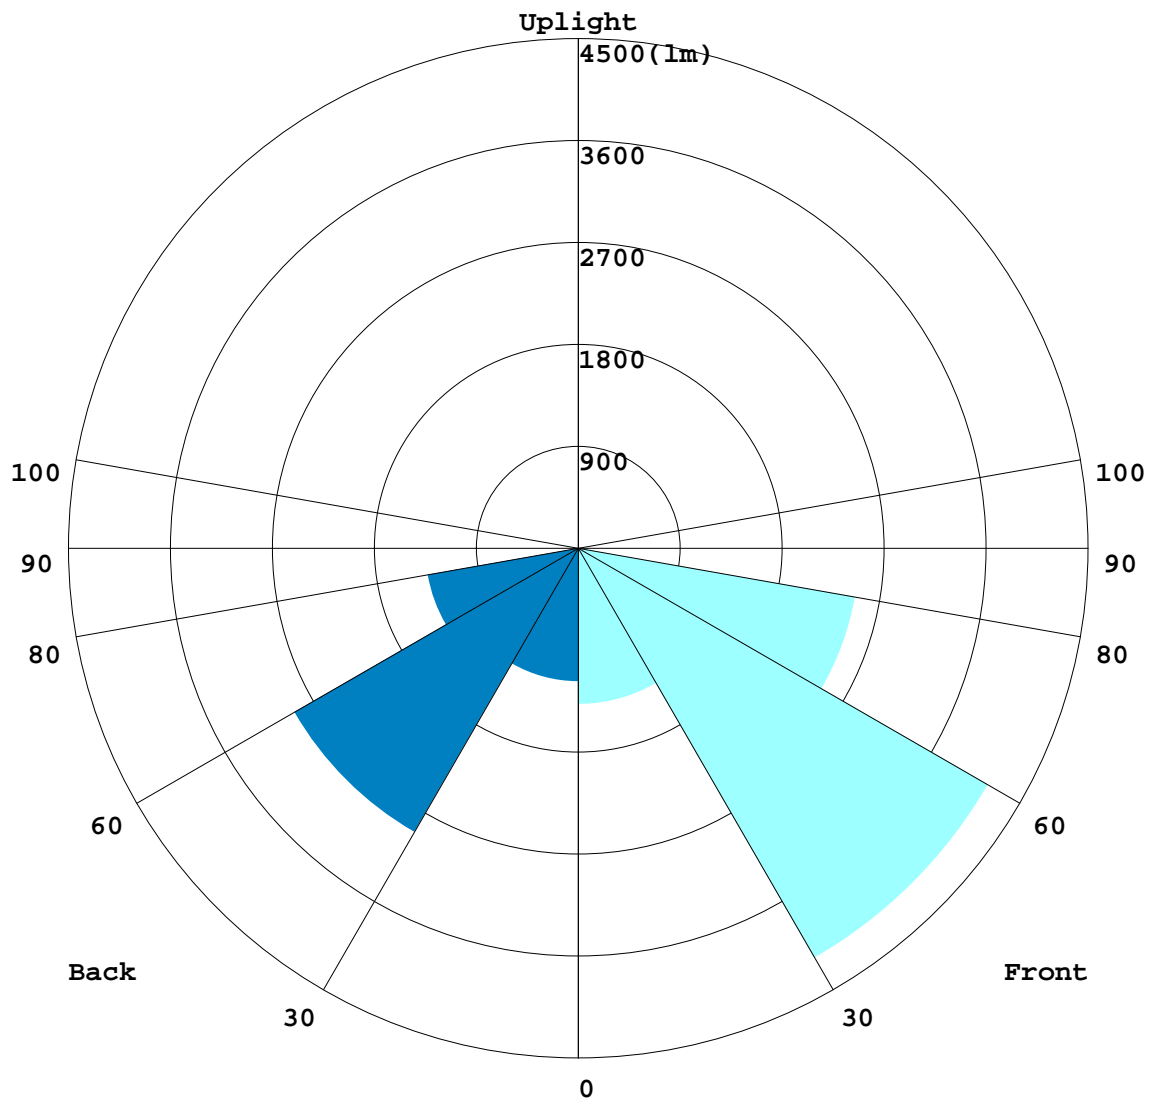

C Range: 0 - 360DEG
 C Interval: 2.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks: 5050 3M

BUG REPORT

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	1376.2	10.1
FM - Front-Medium(30-60)	4174.4	30.8
FH - Front-High(60-80)	2481.1	18.3
FVH - Front-Very High(80-90)	86.72	0.6
Total Forward Light	8118.4	59.8

BL - Back-Low(0-30)	1175.2	8.7
BM - Back-Medium(30-60)	2893.6	21.3
BH - Back-High(60-80)	1349.5	9.9
BVH - Back-Very High(80-90)	33.853	0.2
Total Back Light	5452.1	40.2

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B3-U0-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	5452.1	0	5452.1
Street Side	8118.4	0	8118.4


C Range: 0 - 360DEG
C Interval: 2.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks: 5050 3M

ROAD ISOCANDELA REPORT

NAME: LED路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

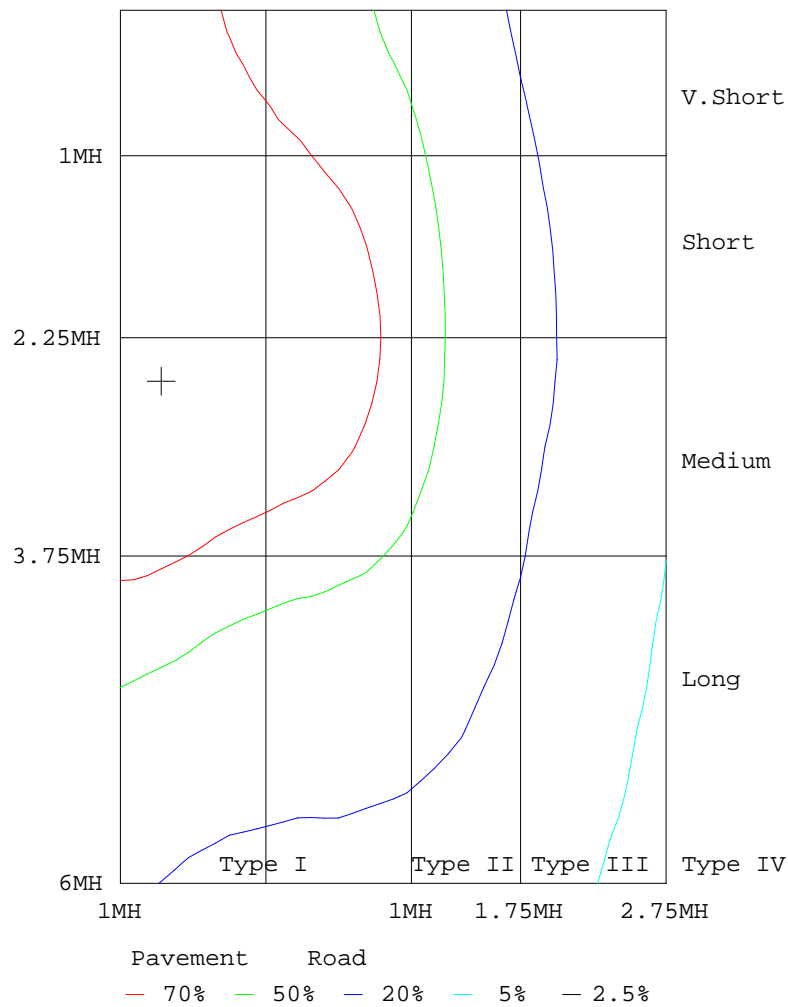

C Range: 0 - 360DEG
C Interval: 2.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks: 5050 3M

