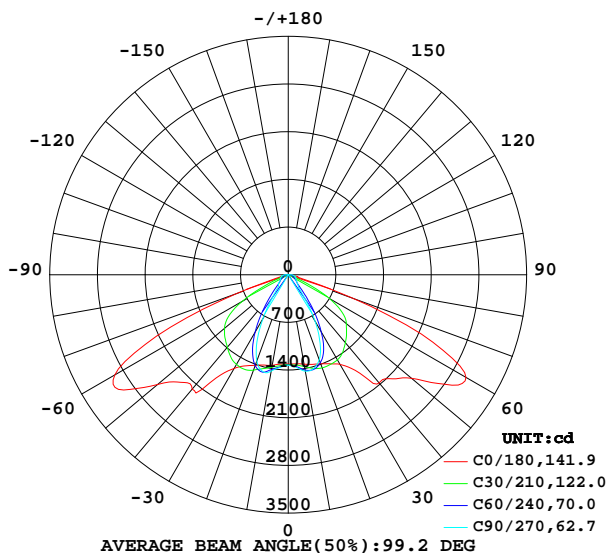
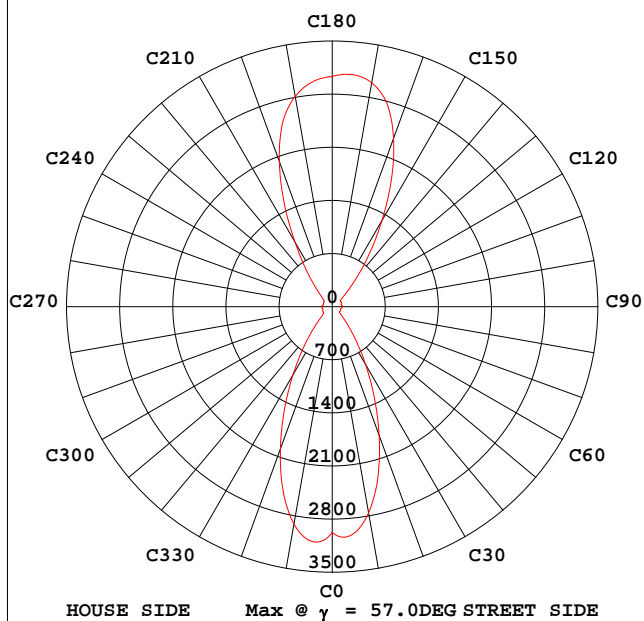


STREETLIGHT PHOTOMETRIC TEST REPORT

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 140.00 lm/W
MODEL	ZGSM-PV5030	I _{max} (cd)	3034	η street_up(%)	0.0	
NOMINAL POWER(W)	30	LOR(%)	100.0	η street_down(%)	50.3	
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	4200	η house_up(%)	0.0	
NOMINAL FLUX(lm)	4200	MAXIMUM @(C,γ)	180,57.0	η house_down(%)	49.8	
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.05000	
TEST VOLTAGE(V)	220.1	η down(%)	100.0	SLI	19.791	


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANSMAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2018

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

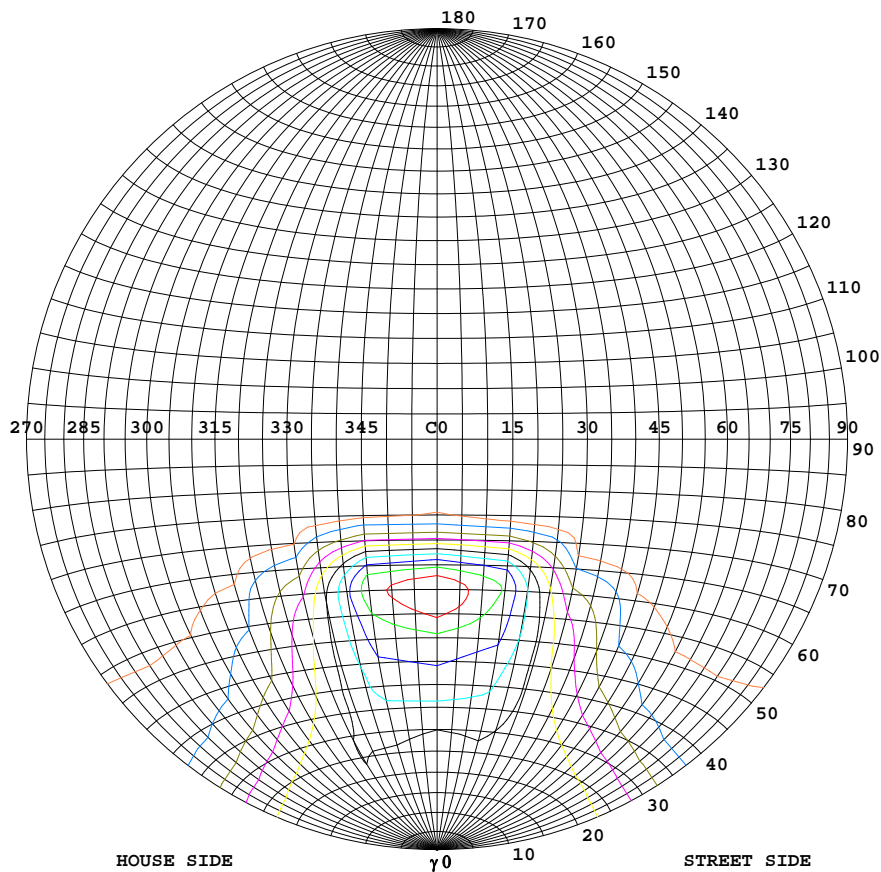

Classification:



IES:Type I - Short
 CIE:Narrow - Short
 IES:Full cut-off
 CIE:Full cut-off
 Max.At80:23.92cd/klm
 Max.At90:0cd/klm
 Max.80-90:23.92cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	3034
90%	2731
80%	2427
70%	2124
60%	1820
50%	1517
40%	1214
30%	910
20%	607
10%	303
5%	152

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE AND ISOLUX DIAGRAM

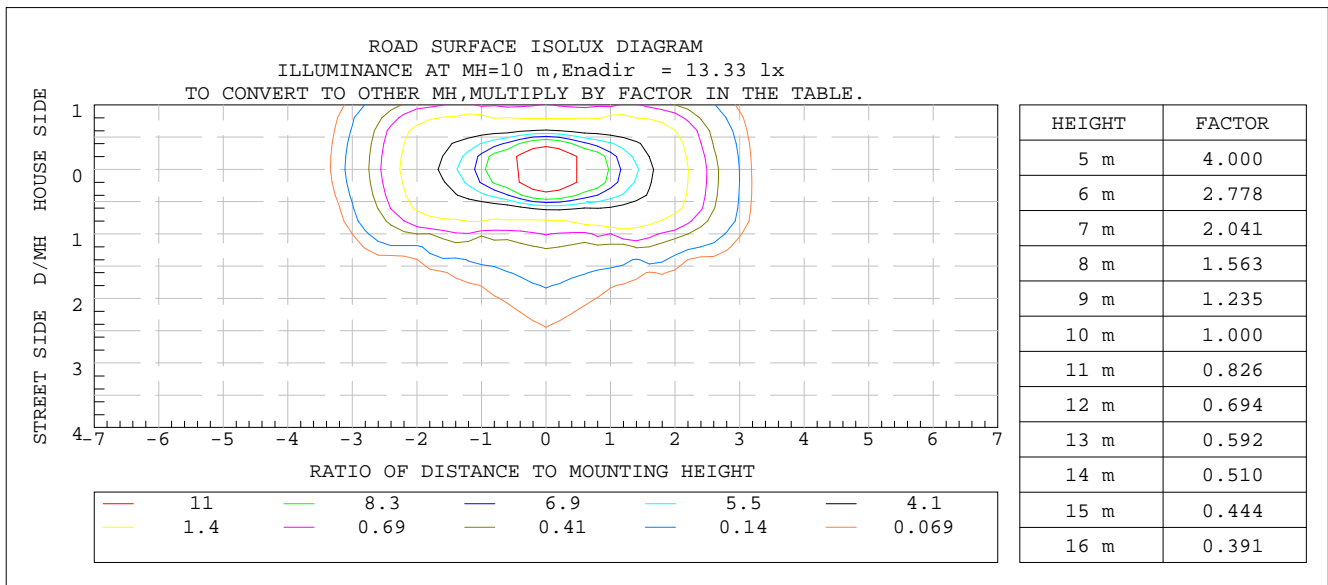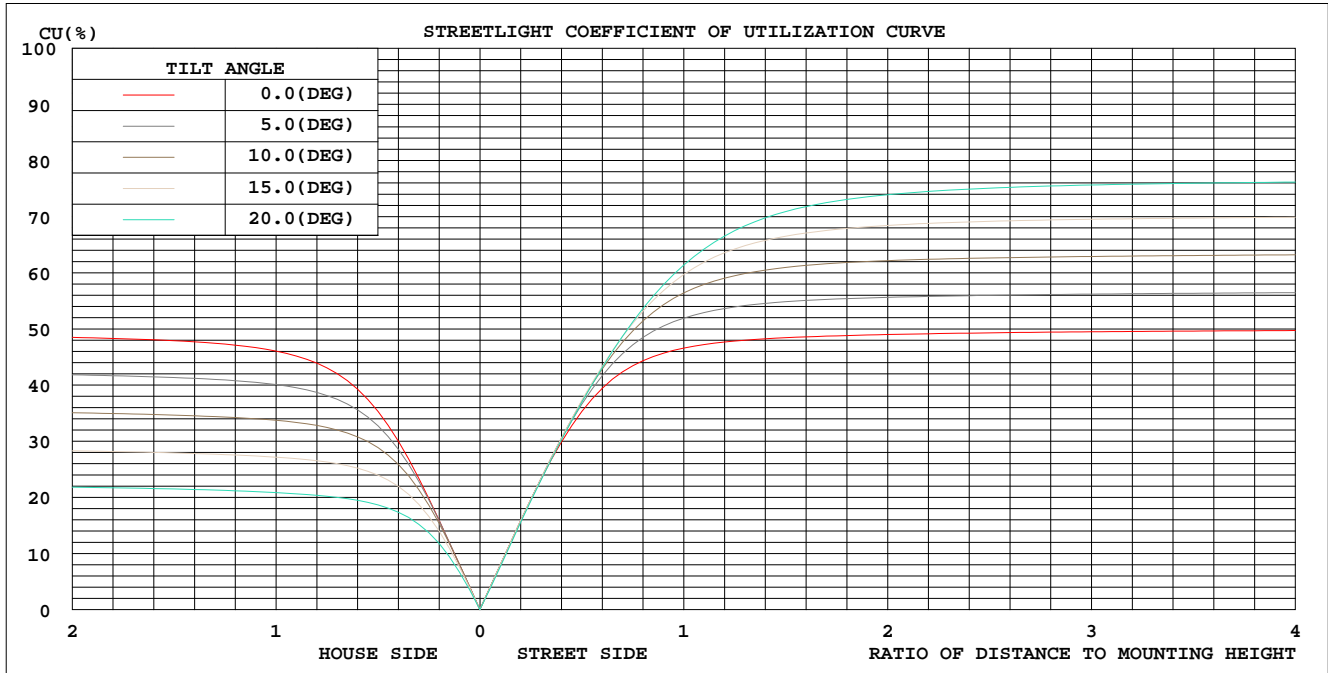

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2018

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	1332	1398	1437	1409	1349	1397	1434	1397	0- 10	130.3	130.3	3.1,3.1
20	1392	1426	1330	1460	1416	1479	1349	1482	10- 20	404.6	534.9	12.7,12.7
30	1519	1211	786.4	1302	1587	1236	742.3	1250	20- 30	616.0	1151	27.4,27.4
40	2075	743.3	237.3	932.0	2195	775.0	225.4	793.0	30- 40	690.2	1841	43.8,43.8
50	2366	333.6	165.0	531.4	2510	391.6	178.7	411.1	40- 50	736.4	2578	61.4,61.4
60	3013	168.0	130.0	201.5	2938	181.1	132.4	192.3	50- 60	839.6	3417	81.4,81.4
70	988.2	72.35	120.5	72.24	806.1	77.51	121.2	80.07	60- 70	620.9	4038	96.1,96.1
80	90.96	44.01	99.67	42.08	54.47	47.42	100.5	45.25	70- 80	119.4	4157	99,99
90	0	0	0	0	0	0	0	0	80- 90	42.93	4200	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2018

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

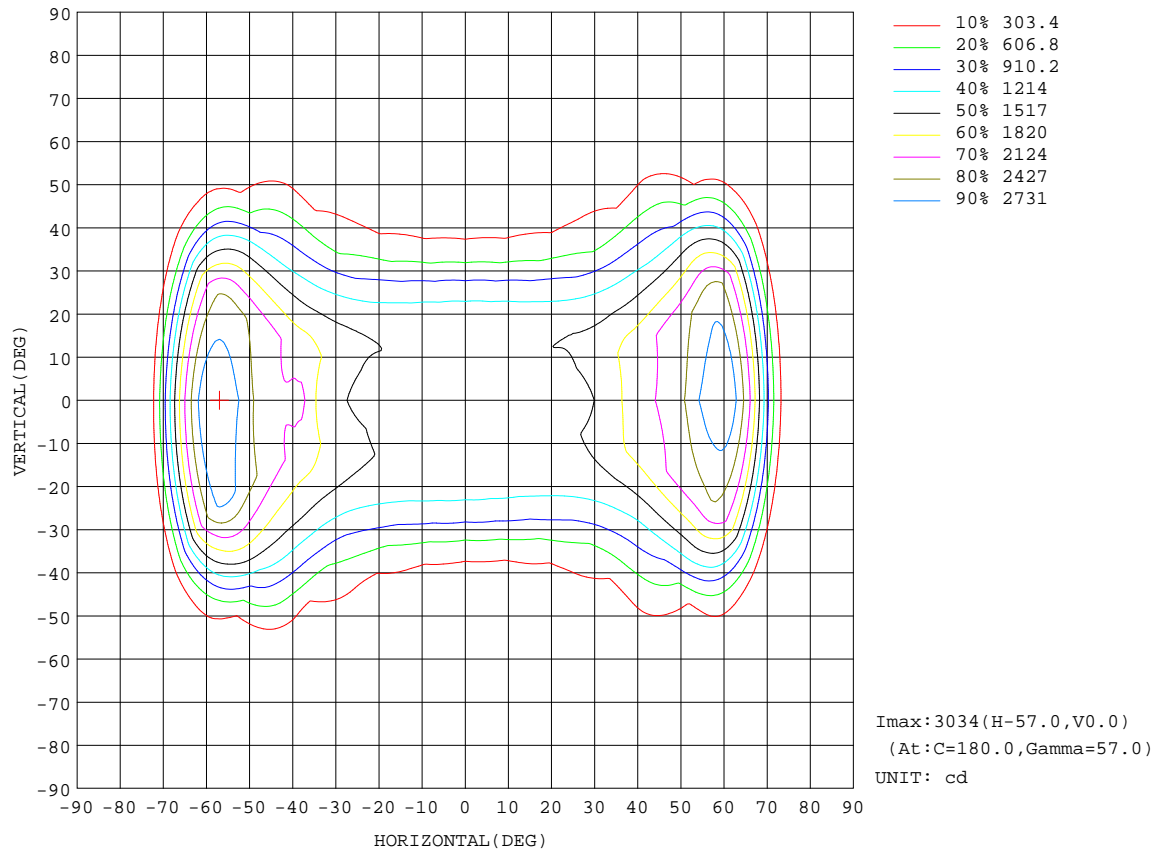

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2018

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

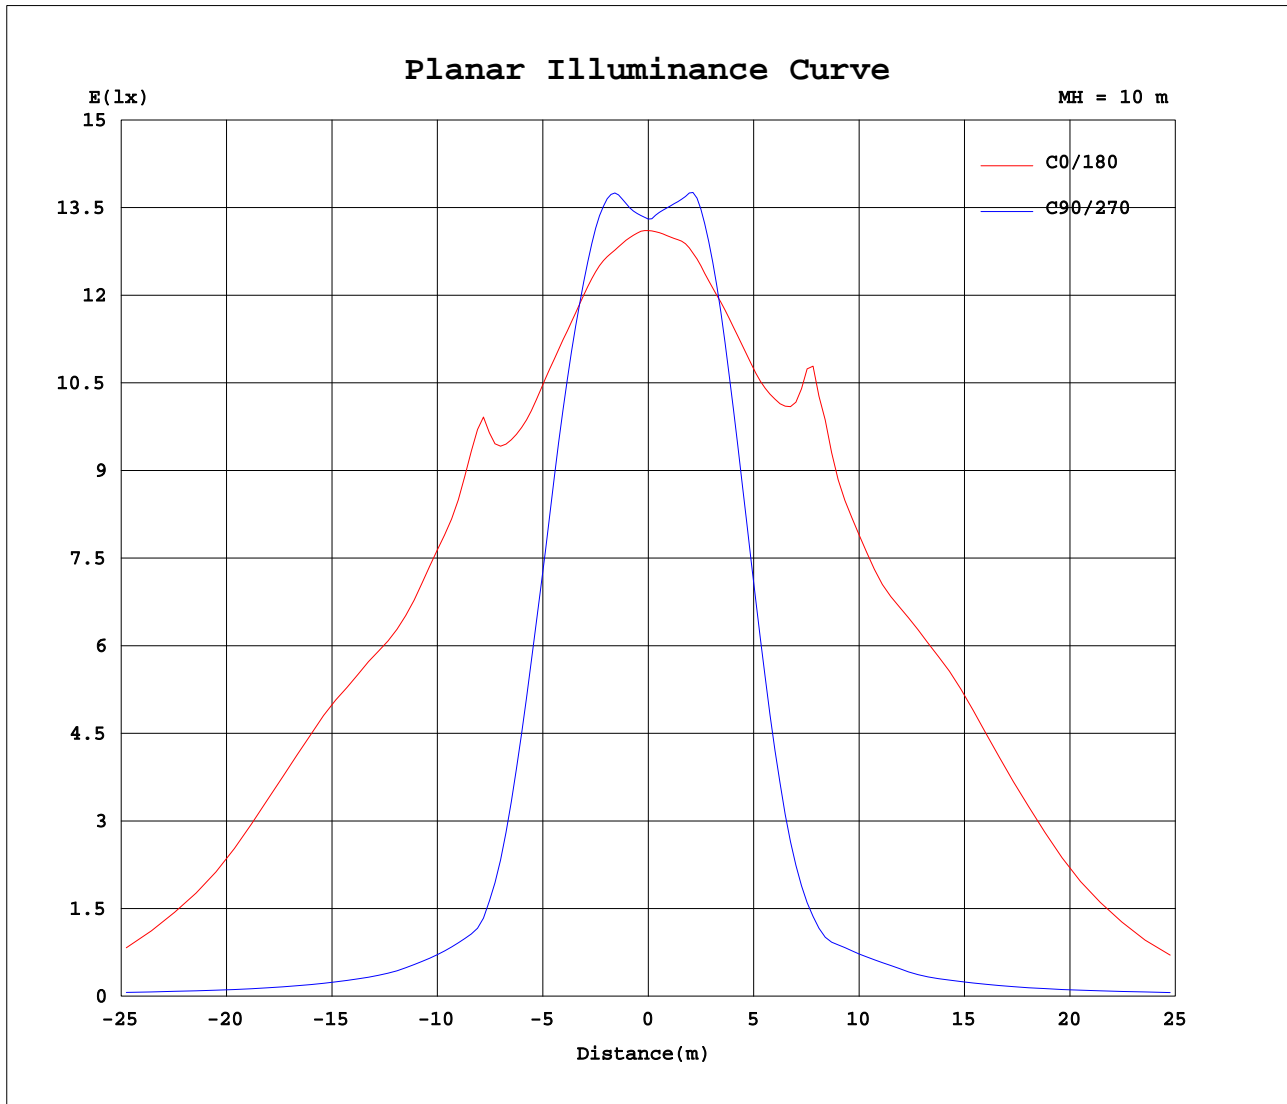


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2018

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.480m [K=1.0000]
 Remarks:

LCS REPORT

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

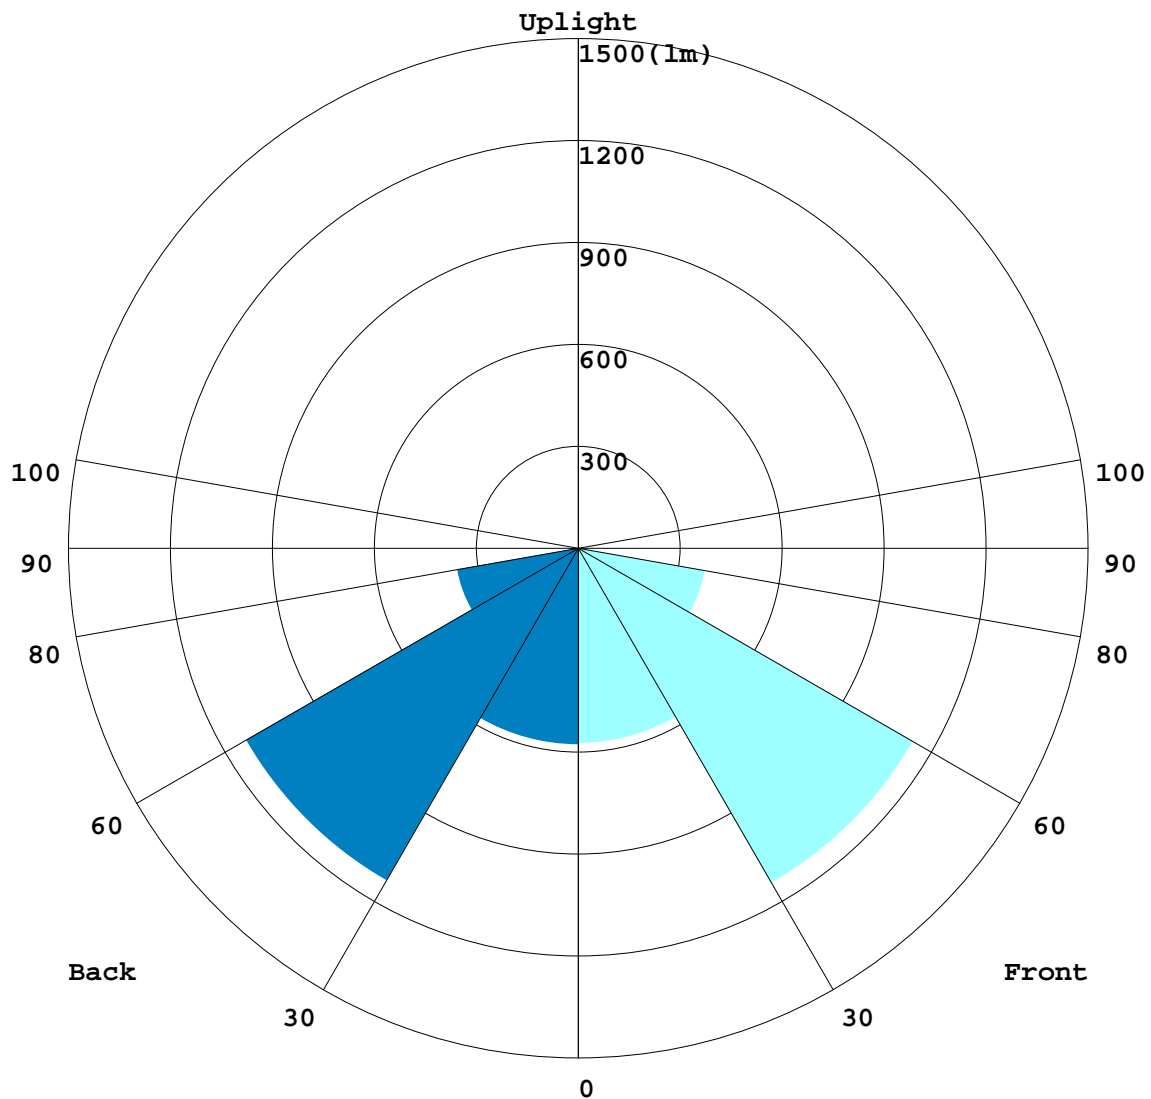LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2018

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

BUG REPORT

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	573.7	13.7
FM - Front-Medium(30-60)	1137.2	27.1
FH - Front-High(60-80)	378.54	9.0
FVH - Front-Very High(80-90)	21.341	0.5
Total Forward Light	2110.8	50.3

BL - Back-Low(0-30)	577.23	13.7
BM - Back-Medium(30-60)	1129	26.9
BH - Back-High(60-80)	361.77	8.6
BVH - Back-Very High(80-90)	21.59	0.5
Total Back Light	2089.6	49.7

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B2-U0-G1
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	2089.6	0	2089.6
Street Side	2110.8	0	2110.8


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2018

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

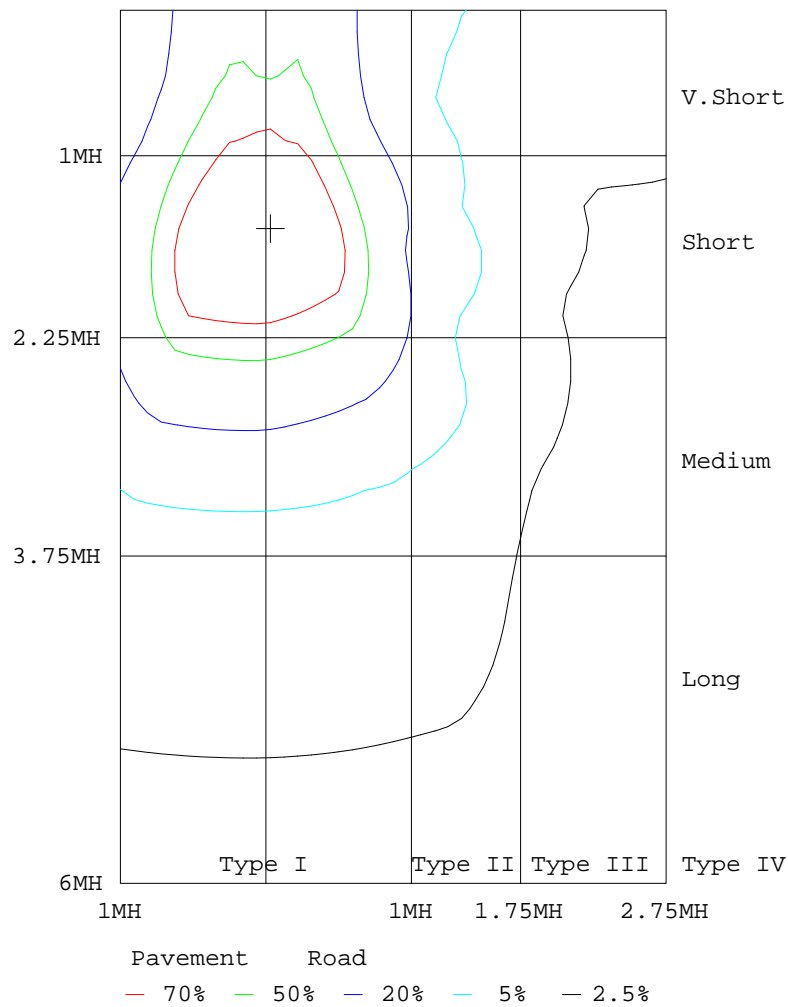

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2018

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

```