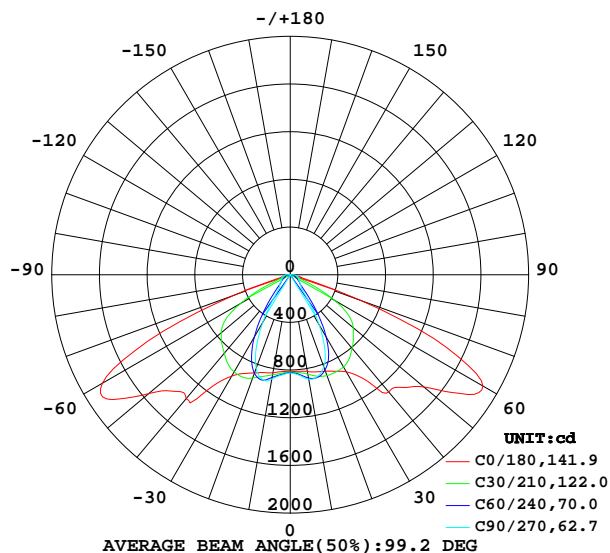
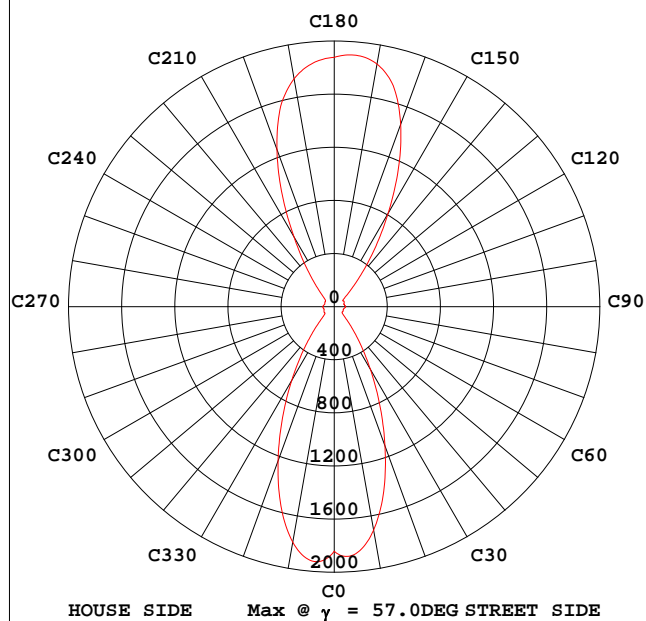


## STREETLIGHT PHOTOMETRIC TEST REPORT

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA      Eff: 130.00 lm/W			
MODEL	ZGSM-PV5020	I <sub>max</sub> (cd)	1878	η street_up(%)	0.0
NOMINAL POWER(W)	20	LOR(%)	100.0	η street_down(%)	50.3
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	2600	η house_up(%)	0.0
NOMINAL FLUX(lm)	2600	MAXIMUM @(C,γ )	180,57.0	η house_down(%)	49.8
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	η down(%)	100.0	SLI	19.101


INTENSITY DISTRIBUTION DIAGRAM  
IN C PLANSMAX INTENSITY CONE SURFACE  
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2018

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

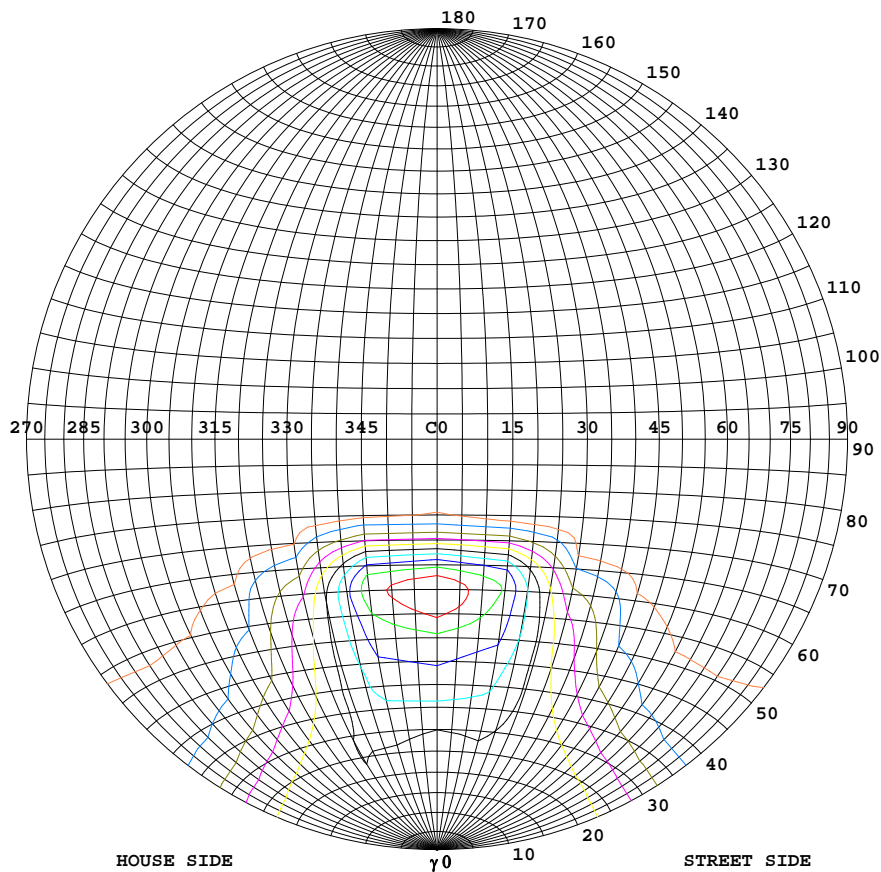

Classification:


IES:Type I - Short  
 CIE:Narrow - Short  
 IES:Full cut-off  
 CIE:Full cut-off  
 Max.At80:23.92cd/klm  
 Max.At90:0cd/klm  
 Max.80-90:23.92cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	1878
90%	1690
80%	1503
70%	1315
60%	1127
50%	939
40%	751
30%	563
20%	376
10%	188
5%	94

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2018

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.480m [K=1.0000]  
 Remarks:

# COEFFICIENT OF UTILIZATION CURVE AND ISOLUX DIAGRAM

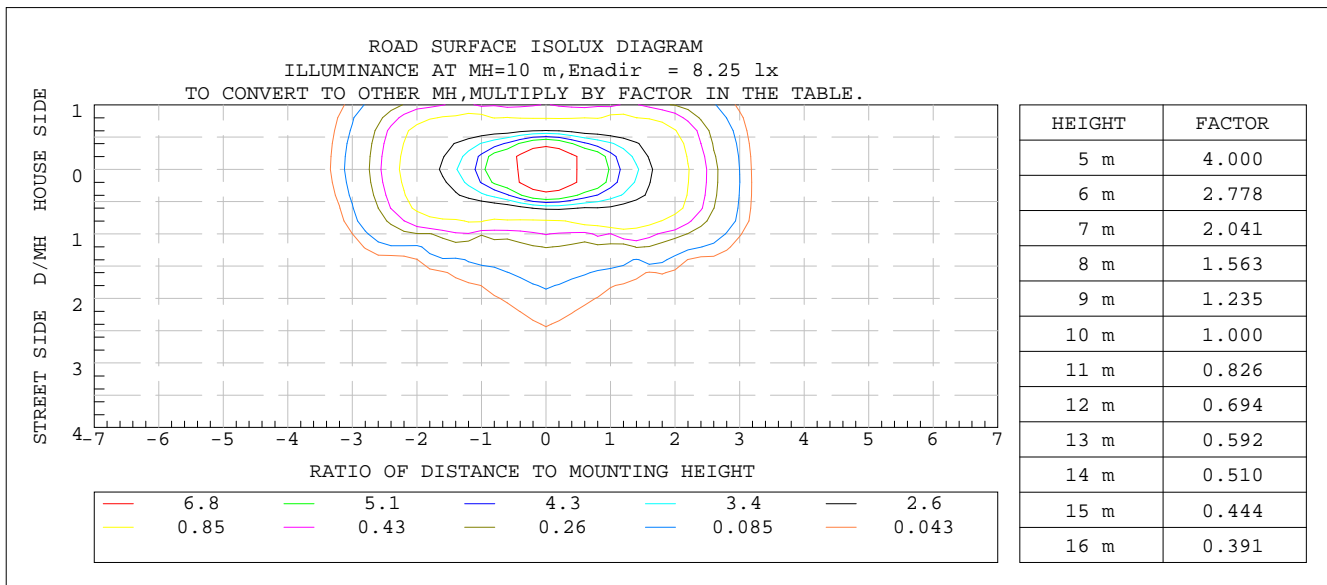

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2018

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.480m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	$\Phi$ lum,lamp
10	824.4	865.4	889.7	871.9	835.1	864.5	887.5	864.9	0- 10	80.67	80.67	3.1,3.1
20	861.5	882.6	823.5	903.7	876.6	915.6	835.2	917.2	10- 20	250.5	331.2	12.7,12.7
30	940.5	749.7	486.8	805.9	982.4	765.0	459.5	773.8	20- 30	381.3	712.5	27.4,27.4
40	1285	460.1	146.9	576.9	1359	479.8	139.5	490.9	30- 40	427.3	1140	43.8,43.8
50	1465	206.5	102.2	328.9	1554	242.4	110.7	254.5	40- 50	455.9	1596	61.4,61.4
60	1865	104.0	80.46	124.7	1819	112.1	81.95	119.0	50- 60	519.8	2115	81.4,81.4
70	611.7	44.79	74.59	44.72	499.0	47.98	75.02	49.57	60- 70	384.4	2500	96.1,96.1
80	56.31	27.24	61.70	26.05	33.72	29.35	62.19	28.01	70- 80	73.93	2574	99,99
90	0	0	0	0	0	0	0	0	80- 90	26.58	2600	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2018

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM


NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

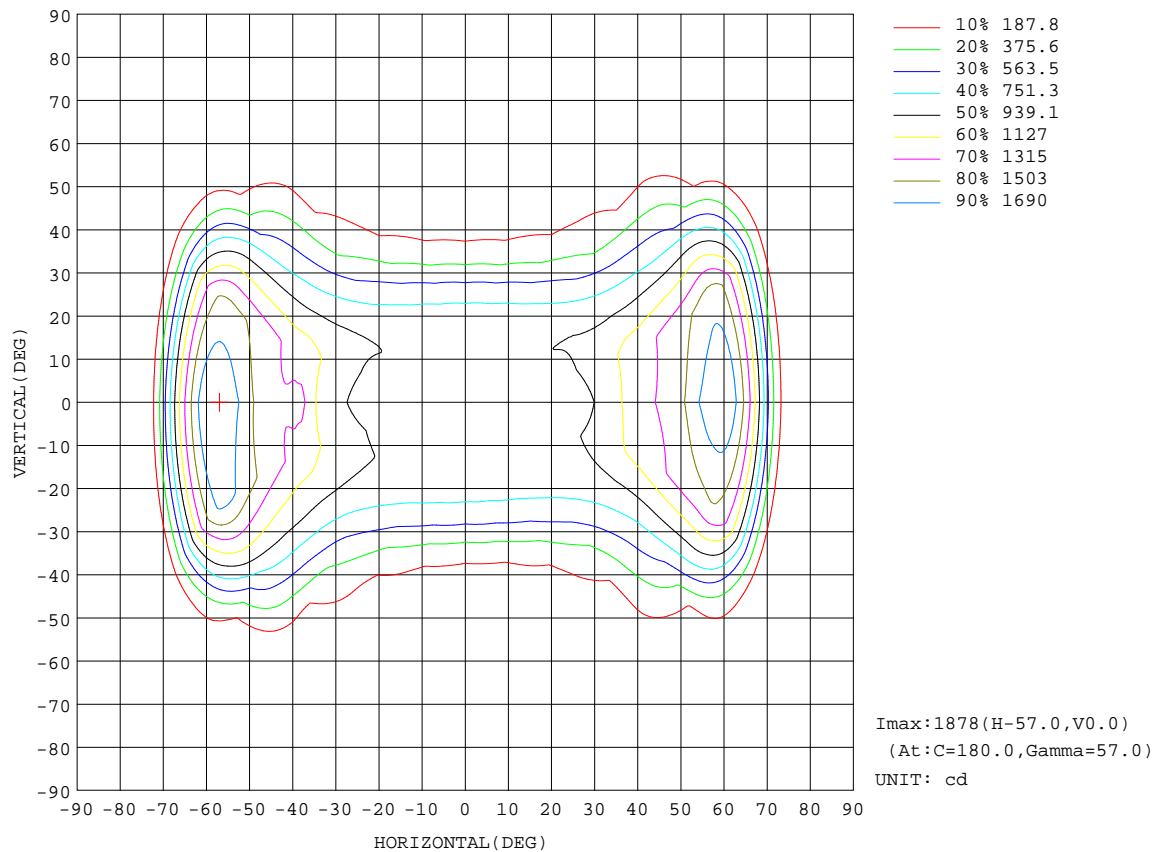

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2018

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

# Planar Illuminance Curve

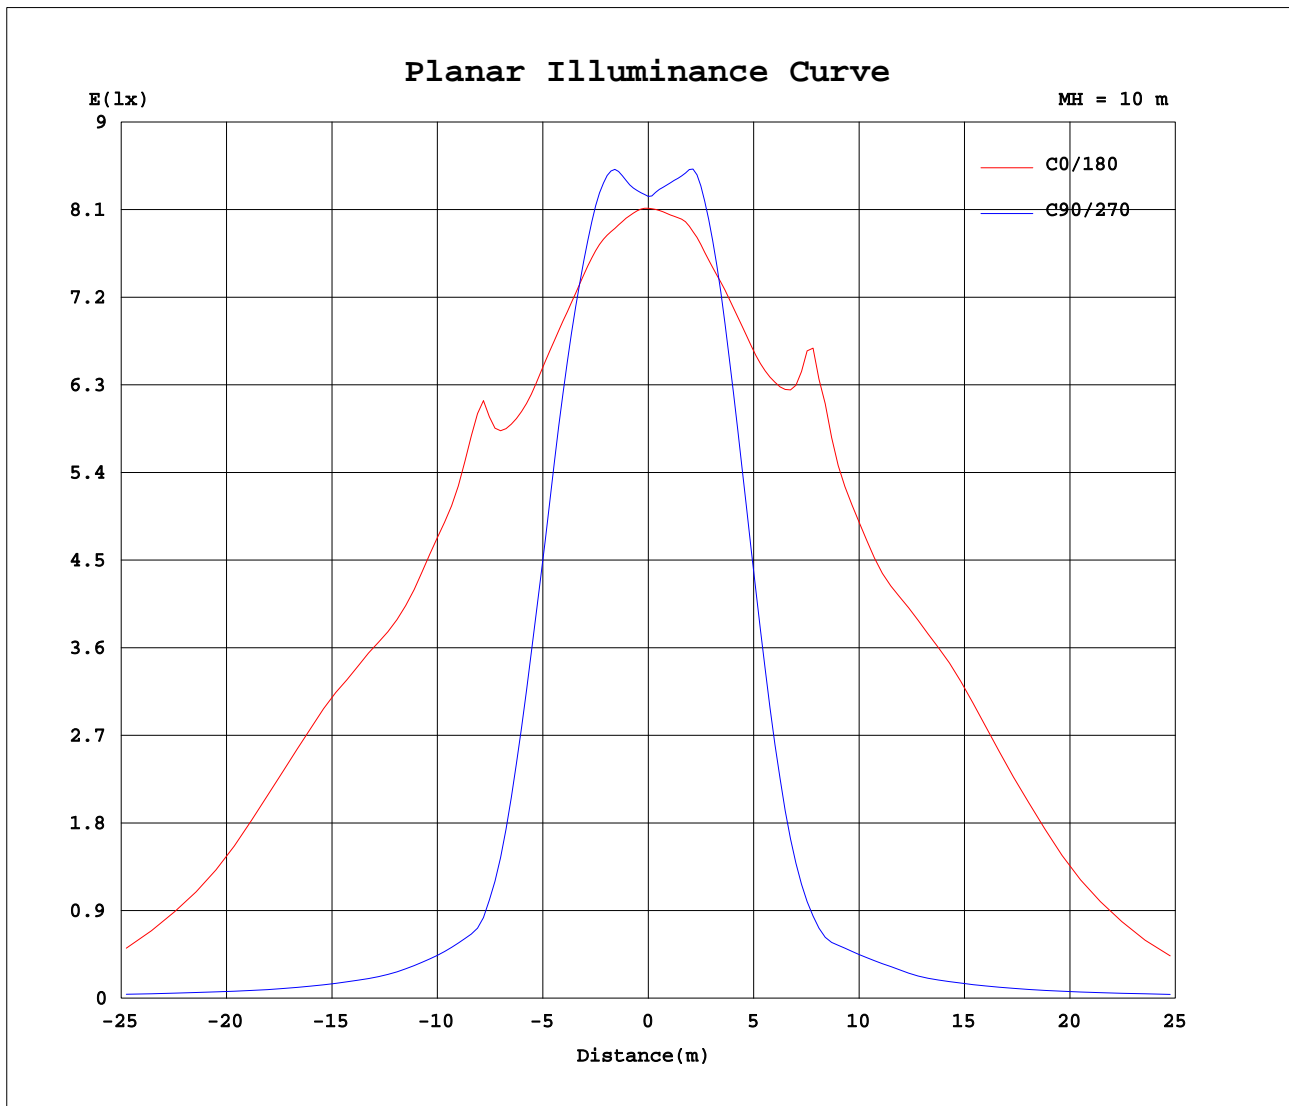


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2018

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 10.480m [K=1.0000]  
 Remarks:

**LCS REPORT**

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

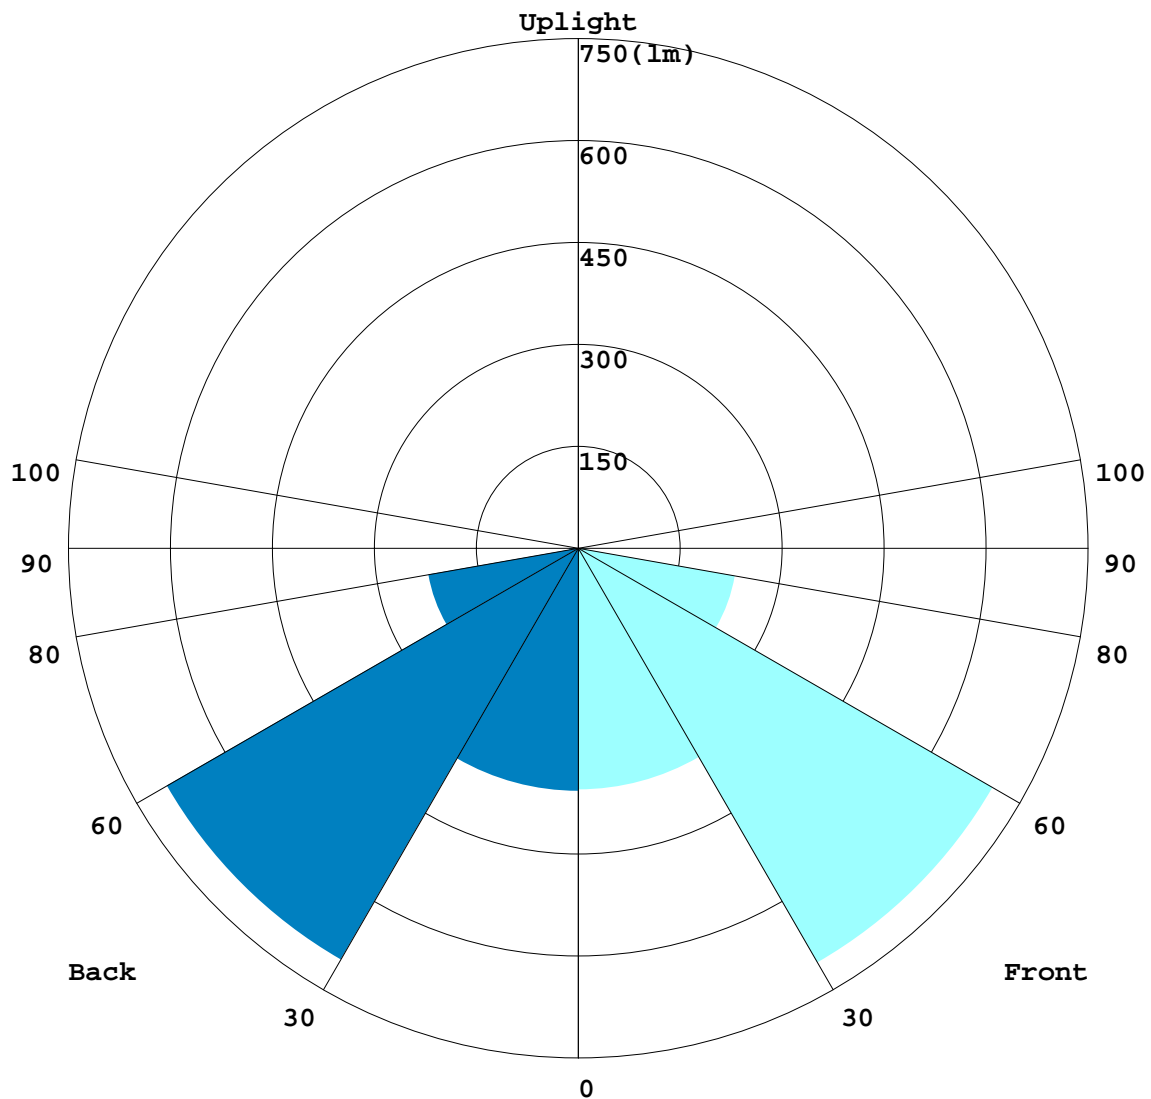**LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH**


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2018

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 10.480m [K=1.0000]  
 Remarks:

### BUG REPORT

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

#### IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	355.15	13.7
FM - Front-Medium(30-60)	704.01	27.1
FH - Front-High(60-80)	234.33	9.0
FVH - Front-Very High(80-90)	13.211	0.5
Total Forward Light	1306.7	50.3

BL - Back-Low(0-30)	357.34	13.7
BM - Back-Medium(30-60)	698.9	26.9
BH - Back-High(60-80)	223.95	8.6
BVH - Back-Very High(80-90)	13.365	0.5
Total Back Light	1293.6	49.7

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B1-U0-G1
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	1293.6	0	1293.6
Street Side	1306.7	0	1306.7

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2018


γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:



ROAD ISOCANDELA REPORT

NAME: LED SOLAR STREET LIGHTS	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ZGSM	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

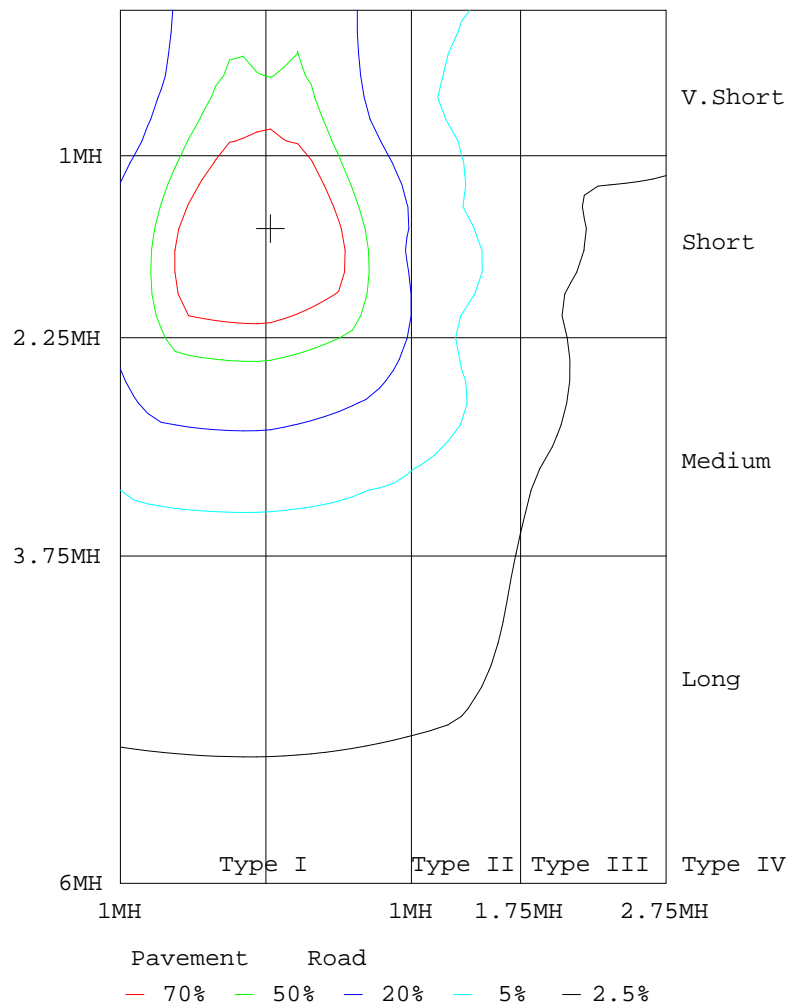

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2018

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.480m [K=1.0000]  
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

```