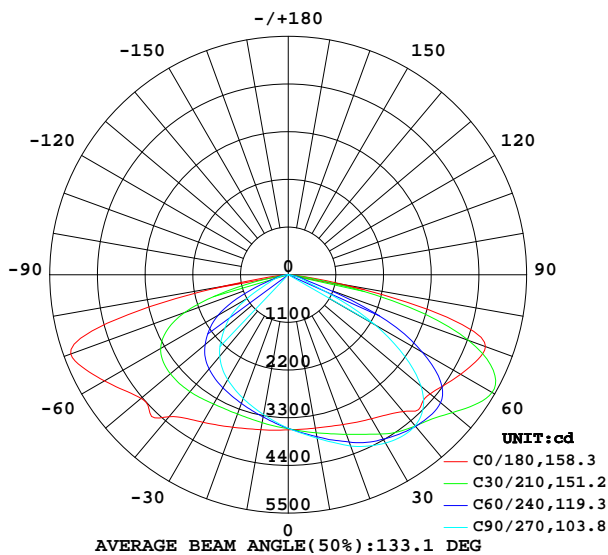
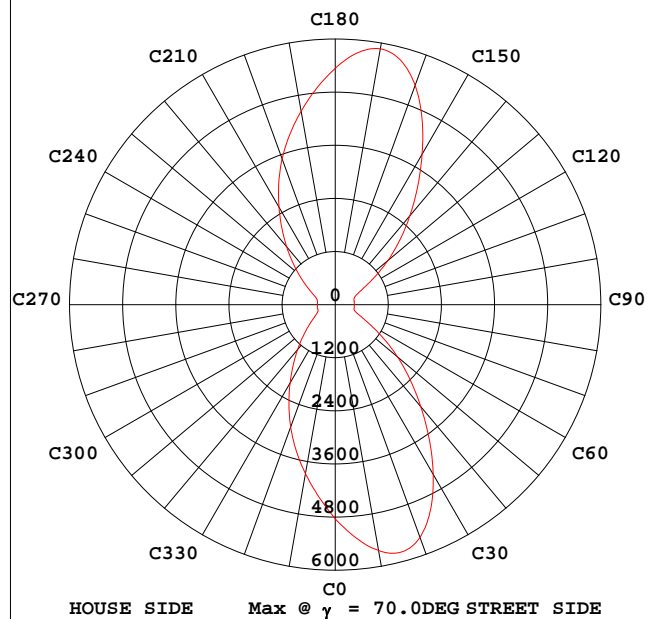


## STREETLIGHT PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.00 lm/W			
MODEL ZGSM-LD120LMX 3M 5050		Imax(cd)	5870	$\eta$ street_up(%)	0.0
NOMINAL POWER(W)	120	LOR(%)	100.0	$\eta$ street_down(%)	59.0
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	16200	$\eta$ house_up(%)	0.0
NOMINAL FLUX(lm)	16200	MAXIMUM @ (C, $\gamma$ )	170,70.0	$\eta$ house_down(%)	41.0
LAMPS INSIDE	1	$\eta$ up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	$\eta$ down(%)	100.0	SLI	24.051


INTENSITY DISTRIBUTION DIAGRAM  
IN C PLANSMAX INTENSITY CONE SURFACE  
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

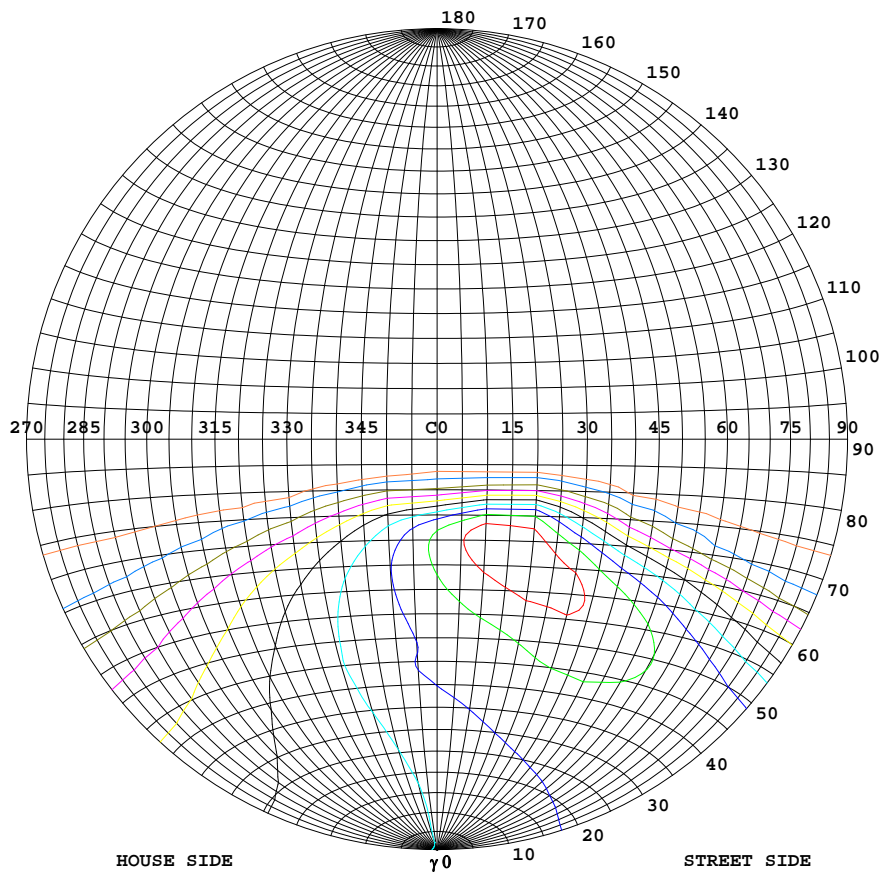



Classification:

IES:Type II - Medium  
 CIE:Average - Long  
 IES:Semi cut-off  
 CIE:Non-cut-off  
 Max.At80:120.9cd/klm  
 Max.At90:0.9268cd/klm  
 Max.80-90:120.9cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	5870
90%	5283
80%	4696
70%	4109
60%	3522
50%	2935
40%	2348
30%	1761
20%	1174
10%	587
5%	293

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2017.11.25

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.480m [K=1.0000]  
 Remarks:

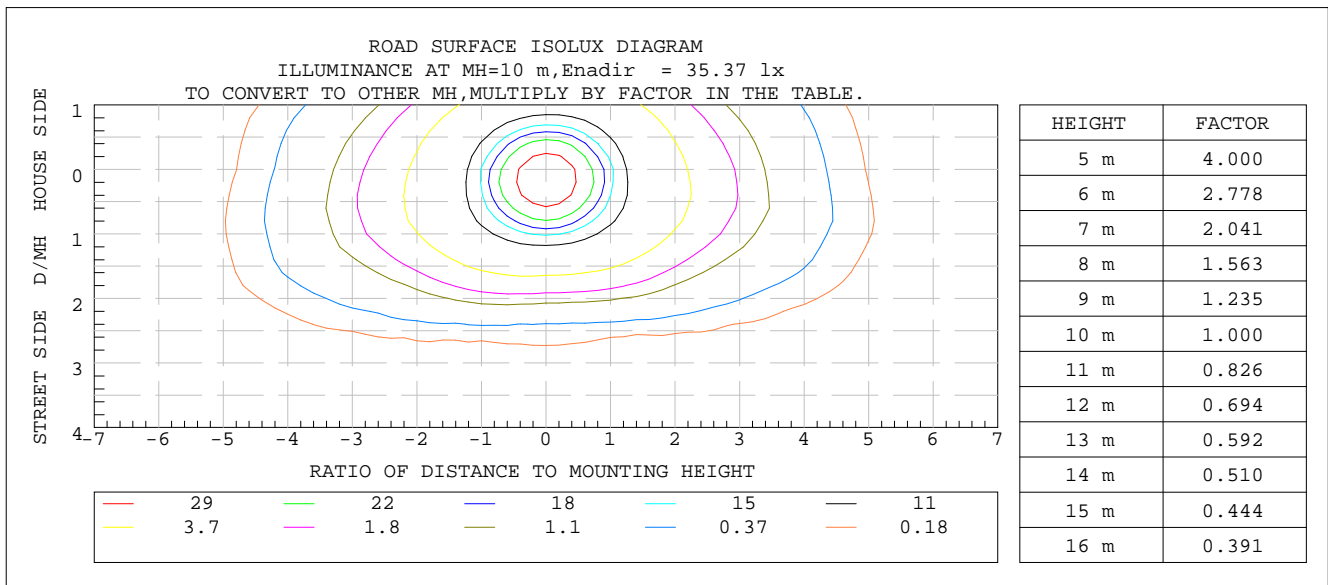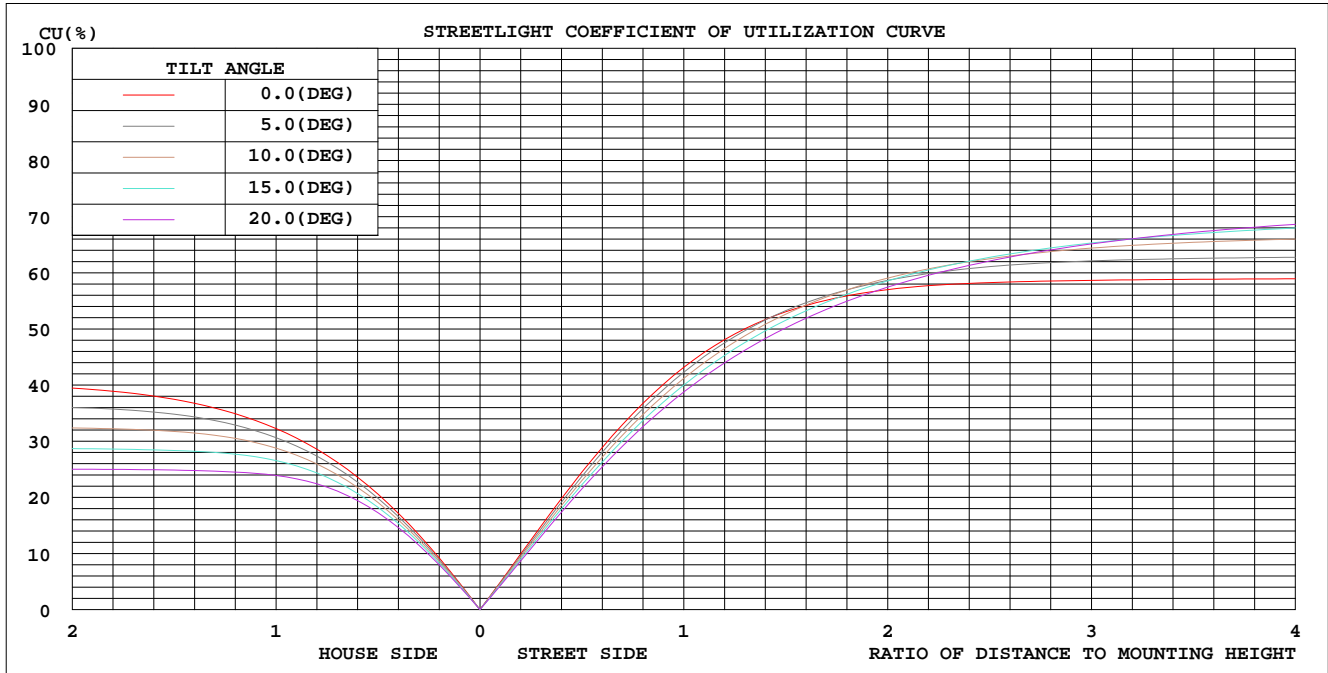COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.480m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	$\Phi$ lum,lamp
10	3592	3752	3830	3760	3631	3390	3276	3352	0- 10	339.4	339.4	2.1,2.1
20	3678	4018	4206	4042	3744	3277	3038	3210	10- 20	1022	1362	8.4,8.4
30	3837	4346	4484	4368	3931	3219	2794	3122	20- 30	1714	3076	19,19
40	4121	4589	4551	4605	4278	3173	2462	3021	30- 40	2391	5467	33.7,33.7
50	4275	4905	4001	4856	4436	3016	1907	2779	40- 50	2968	8435	52.1,52.1
60	4592	4623	2318	4385	4896	2577	1102	2268	50- 60	3245	11680	72.1,72.1
70	4840	2424	432.0	2088	5340	1395	401.5	1075	60- 70	2842	14522	89.6,89.6
80	1262	206.3	96.14	203.8	1480	189.1	130.1	173.9	70- 80	1545	16067	99.2,99.2
90	13.83	6.391	2.475	3.898	12.90	8.703	4.253	9.561	80- 90	133.9	16200	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM


NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

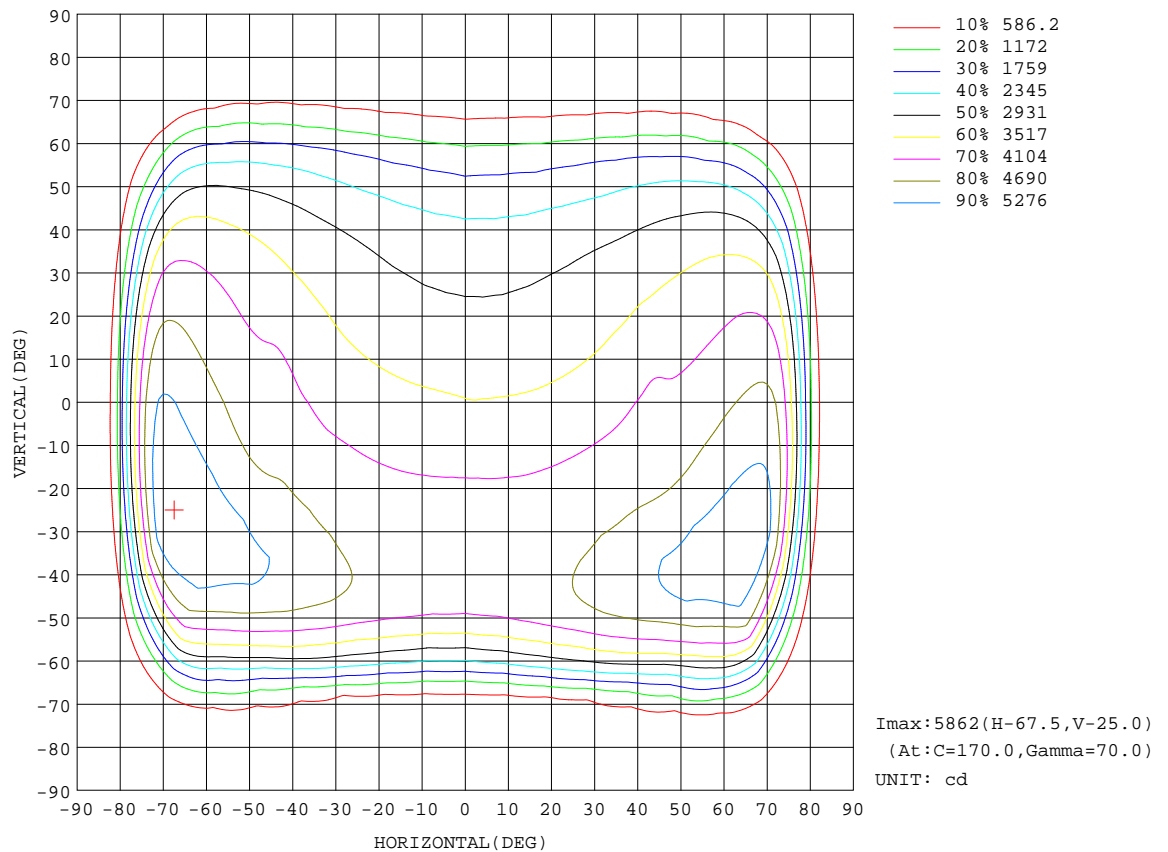

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

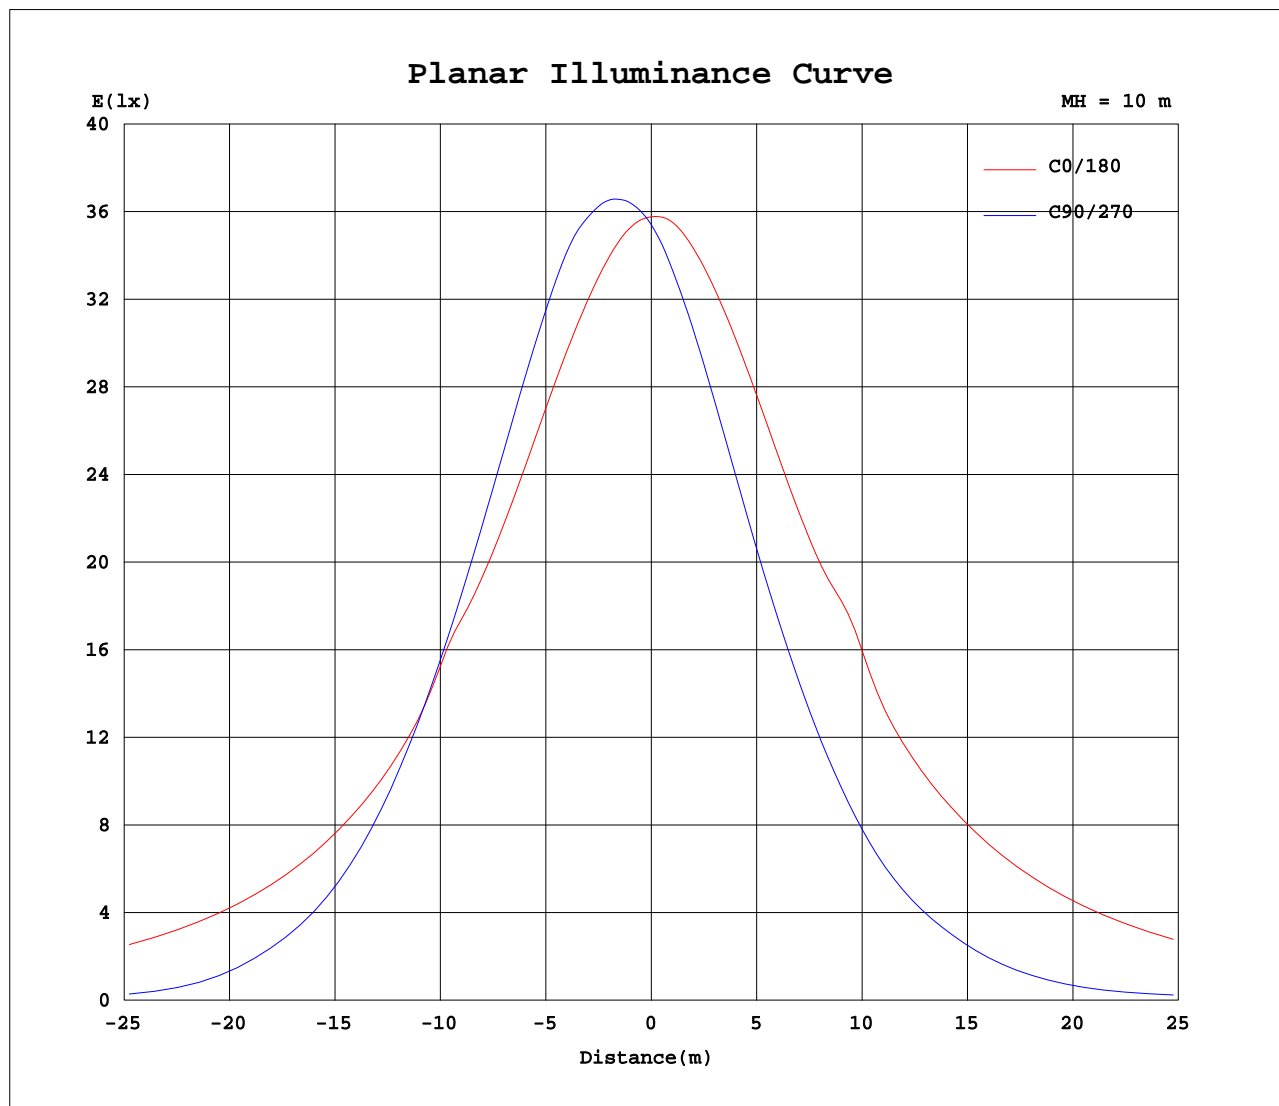


C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.480m [K=1.0000]  
Remarks:

LCS REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

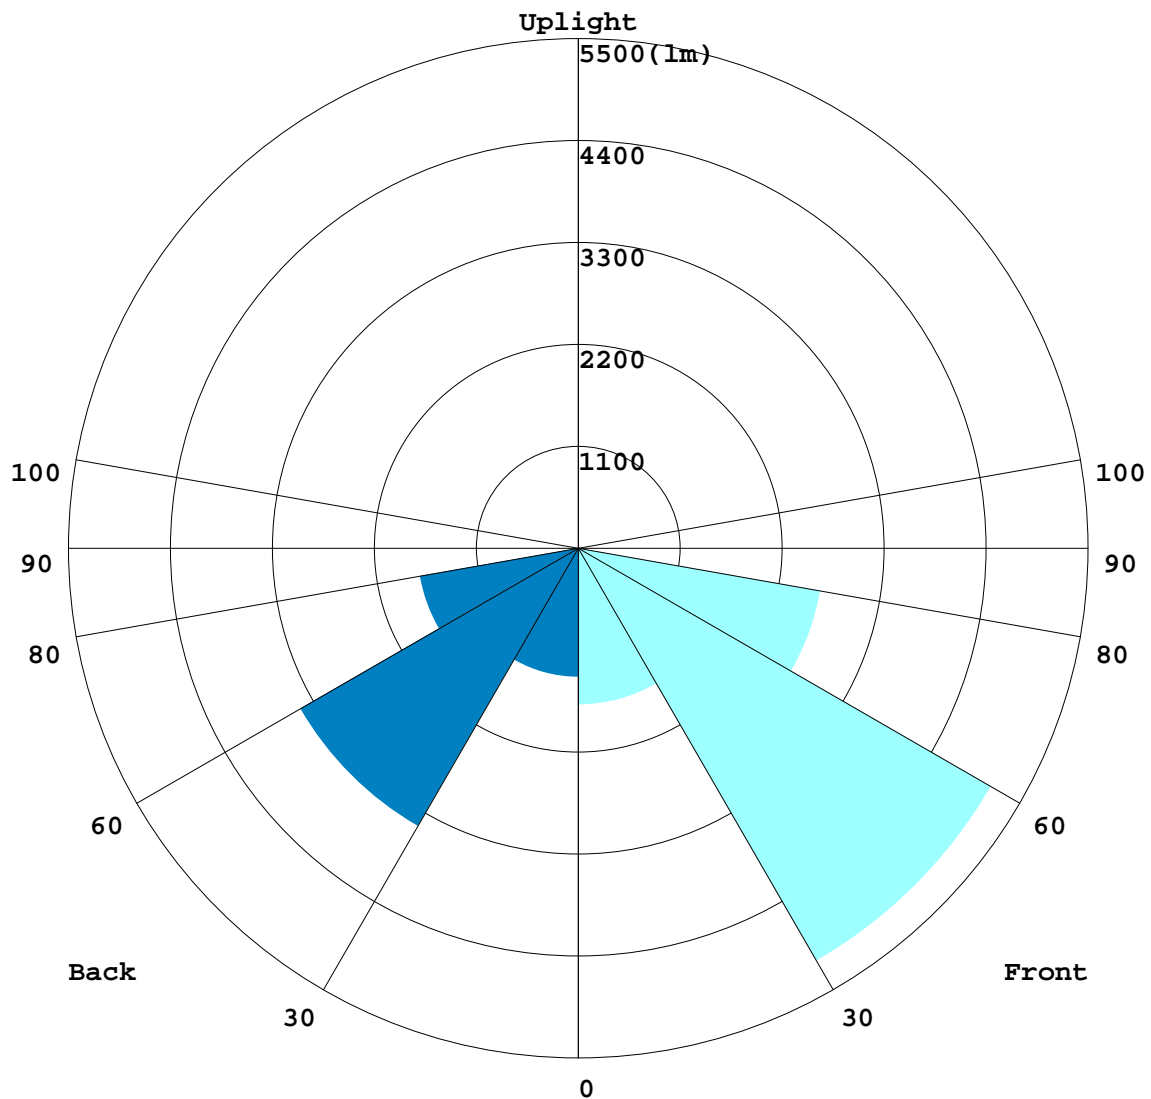

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

### BUG REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

#### IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	1687	10.4
FM - Front-Medium(30-60)	5141.3	31.7
FH - Front-High(60-80)	2651.7	16.4
FVH - Front-Very High(80-90)	76.084	0.5
Total Forward Light	9556.1	59.0

BL - Back-Low(0-30)	1388.9	8.6
BM - Back-Medium(30-60)	3462.7	21.4
BH - Back-High(60-80)	1734.9	10.7
BVH - Back-Very High(80-90)	57.771	0.4
Total Back Light	6644.3	41.0

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B3-U0-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	6644.3	0	6644.3
Street Side	9556.1	0	9556.1

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25


γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:



ROAD ISOCANDELA REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

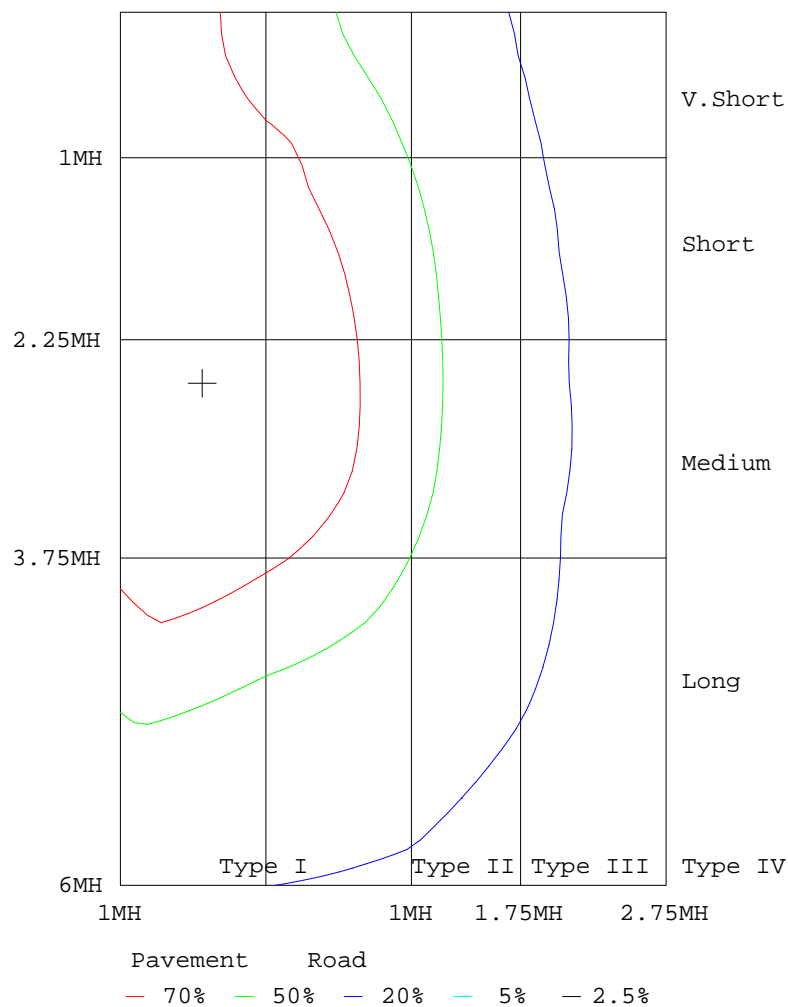

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:



