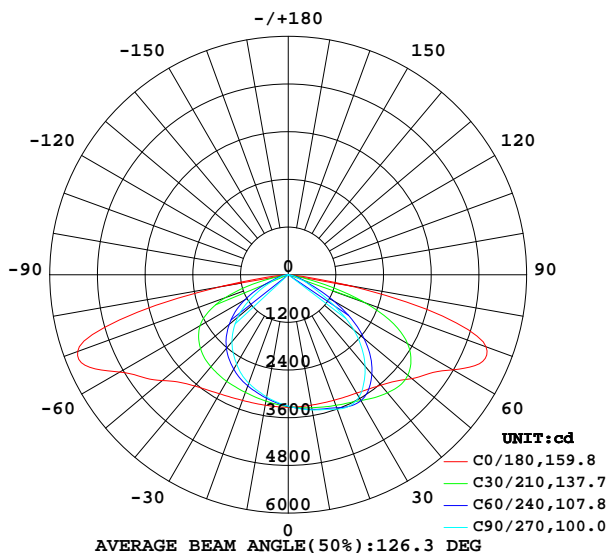
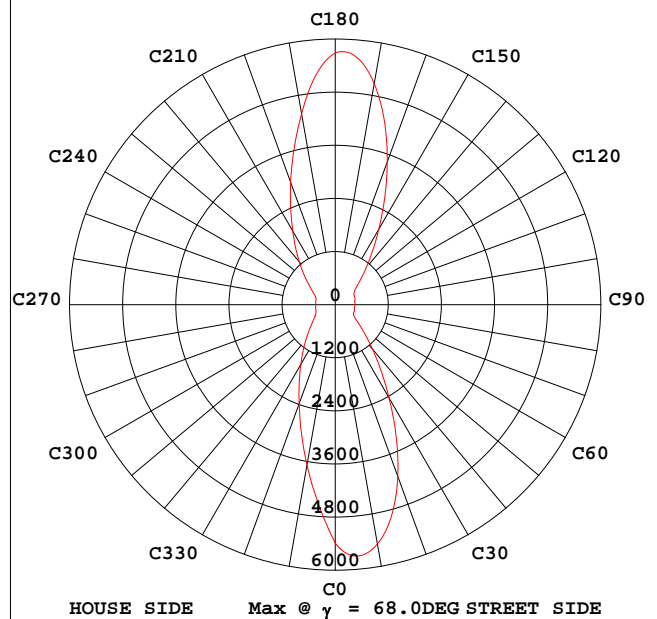


STREETLIGHT PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 140.00 lm/W			
MODEL	ZGSM-LD90LMX 2M 5050	Imax(cd)	5686	η street_up(%)	0.0
NOMINAL POWER(W)	90	LOR(%)	100.0	η street_down(%)	54.6
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	12600	η house_up(%)	0.0
NOMINAL FLUX(lm)	12600	MAXIMUM @ (C, γ)	180,68.0	η house_down(%)	45.4
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	η down(%)	100.0	SLI	24.368


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANSMAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.10.31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

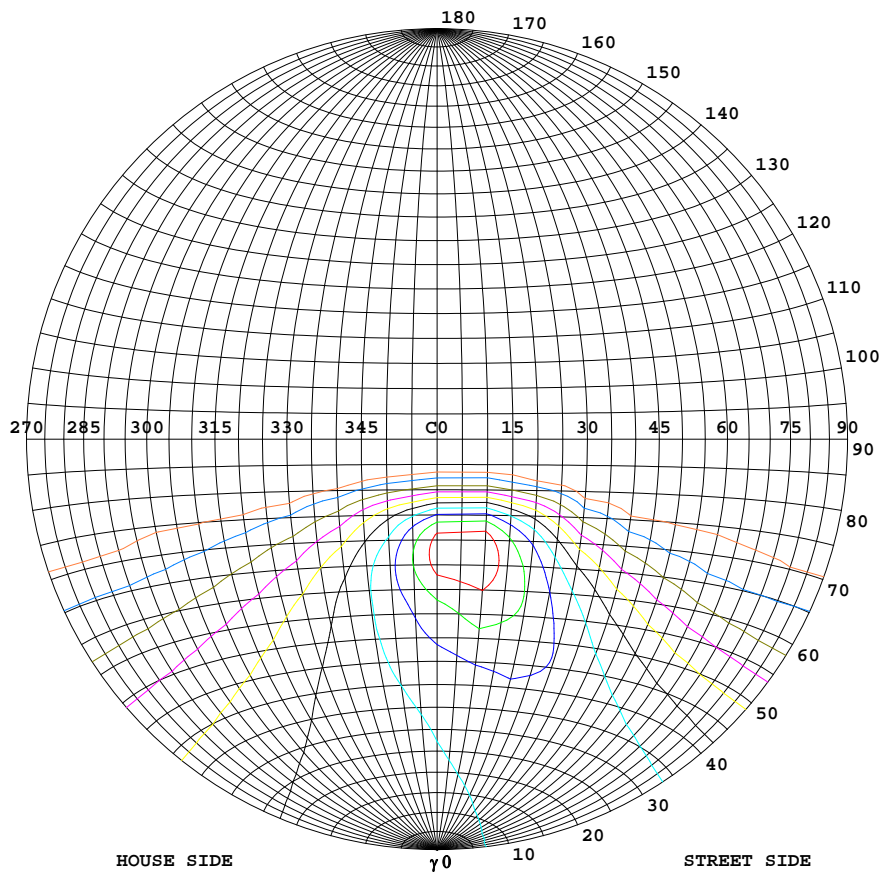



Classification:

IES:Type II - Medium
 CIE:Narrow - Intermediate
 IES:Semi cut-off
 CIE:Non-cut-off
 Max.At80:137.3cd/klm
 Max.At90:0.9277cd/klm
 Max.80-90:137.3cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	5686
90%	5117
80%	4549
70%	3980
60%	3412
50%	2843
40%	2274
30%	1706
20%	1137
10%	569
5%	284

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.10.31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

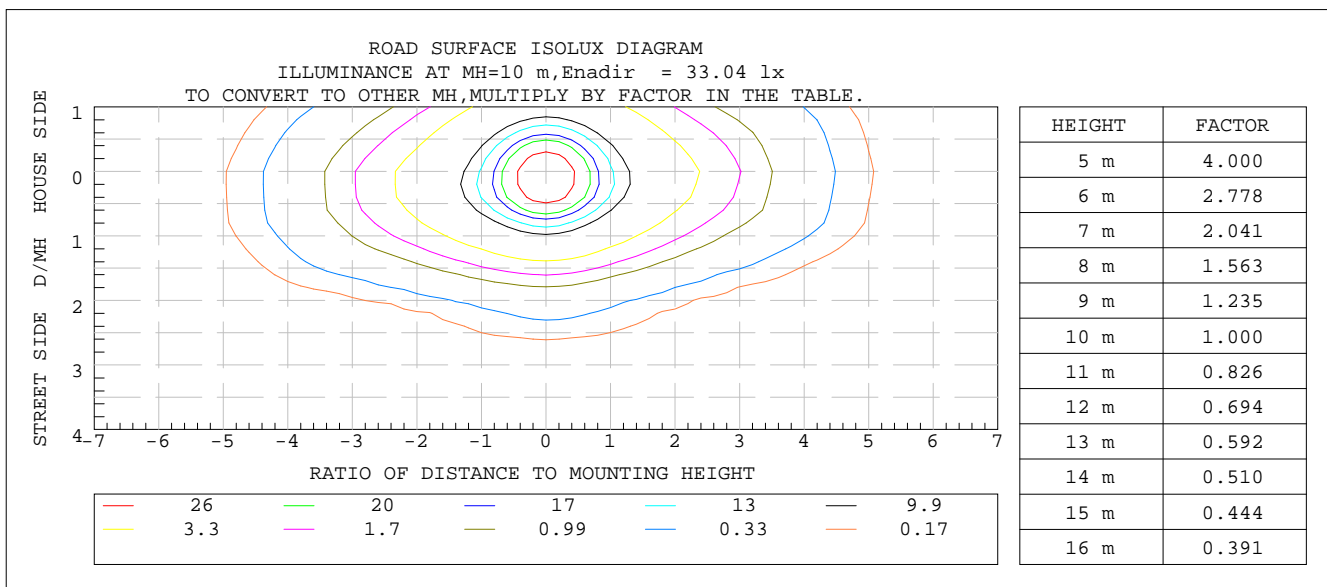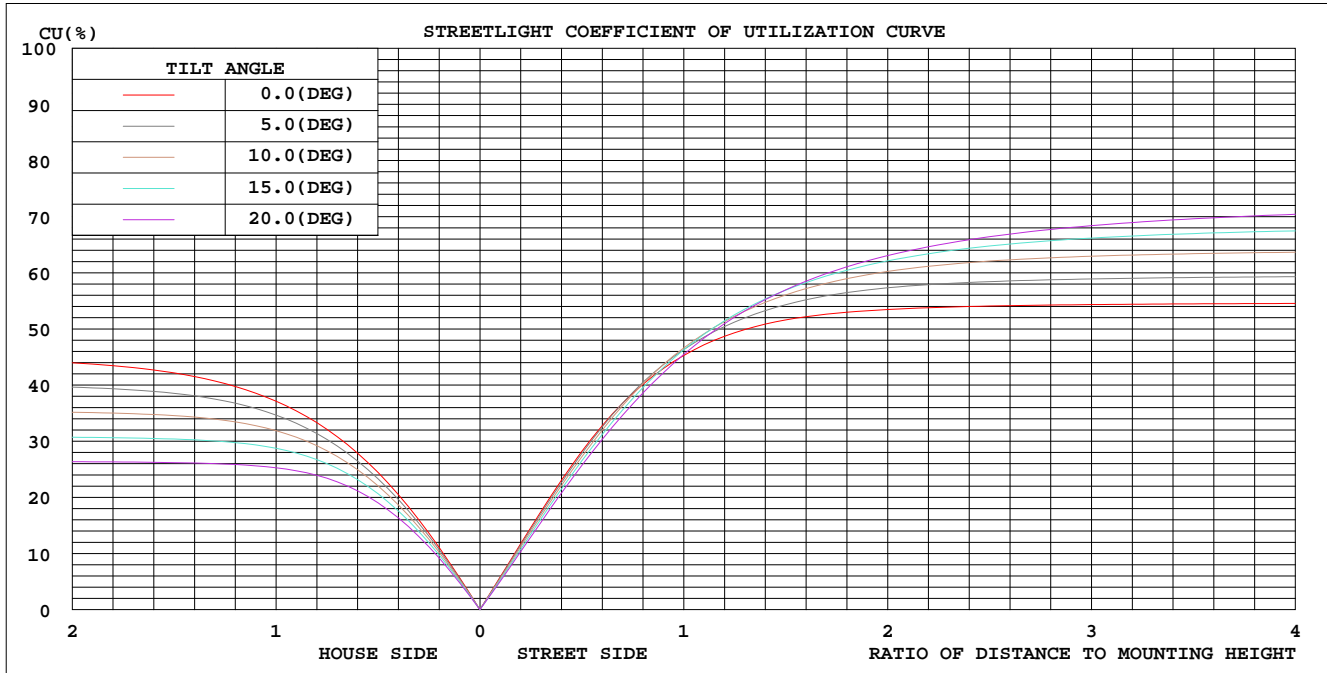COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.10.31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	3334	3422	3455	3410	3335	3188	3124	3176	0- 10	315.5	315.5	2.5,2.5
20	3362	3528	3600	3525	3366	3055	2906	3049	10- 20	934.1	1250	9.92,9.92
30	3441	3692	3558	3684	3459	2906	2600	2878	20- 30	1524	2774	22,22
40	3629	3611	3007	3515	3658	2688	2206	2624	30- 40	2012	4786	38,38
50	4066	3113	2152	2936	4145	2335	1654	2213	40- 50	2309	7095	56.3,56.3
60	4787	2152	928.3	1921	4900	1769	919.7	1586	50- 60	2320	9415	74.7,74.7
70	5296	746.7	297.1	632.4	5638	845.4	322.5	683.0	60- 70	1977	11392	90.4,90.4
80	1501	109.4	70.44	116.2	1730	139.5	97.69	129.1	70- 80	1110	12502	99.2,99.2
90	11.21	4.438	1.830	2.582	10.62	4.329	2.127	5.001	80- 90	98.52	12600	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.10.31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

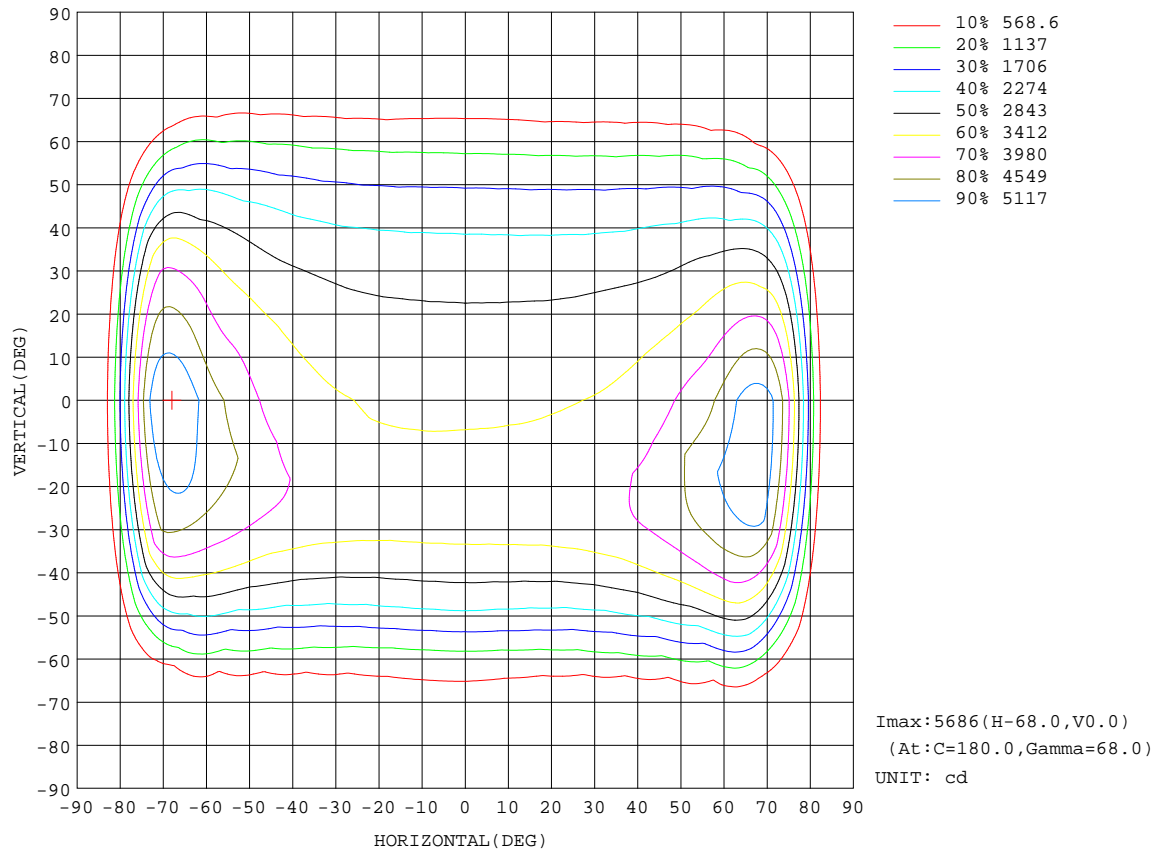

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.10.31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

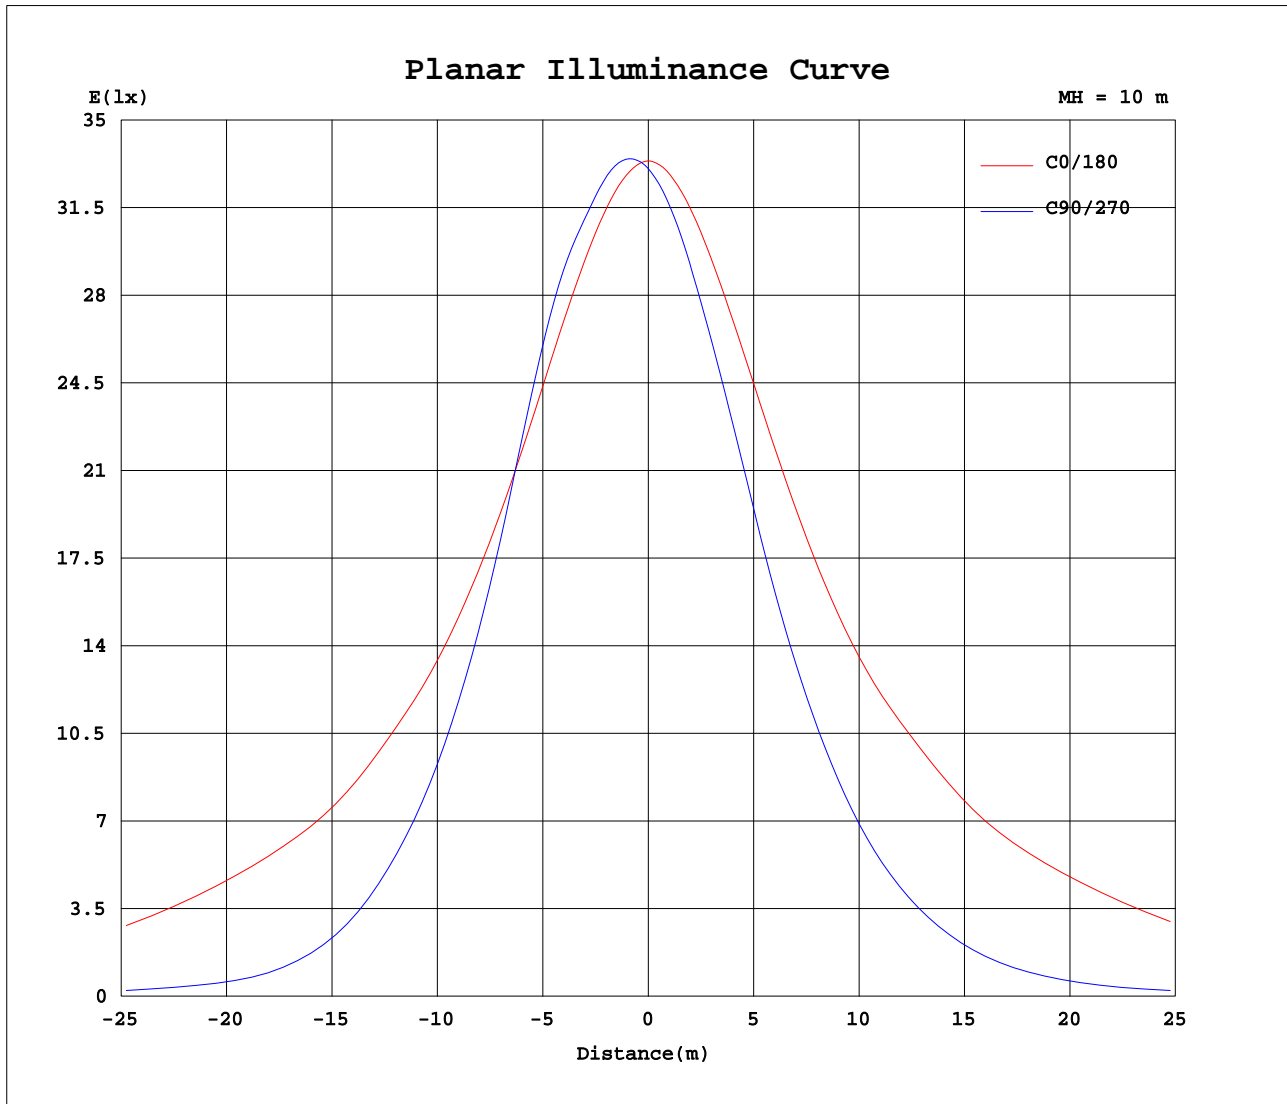


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.10.31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

LCS REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

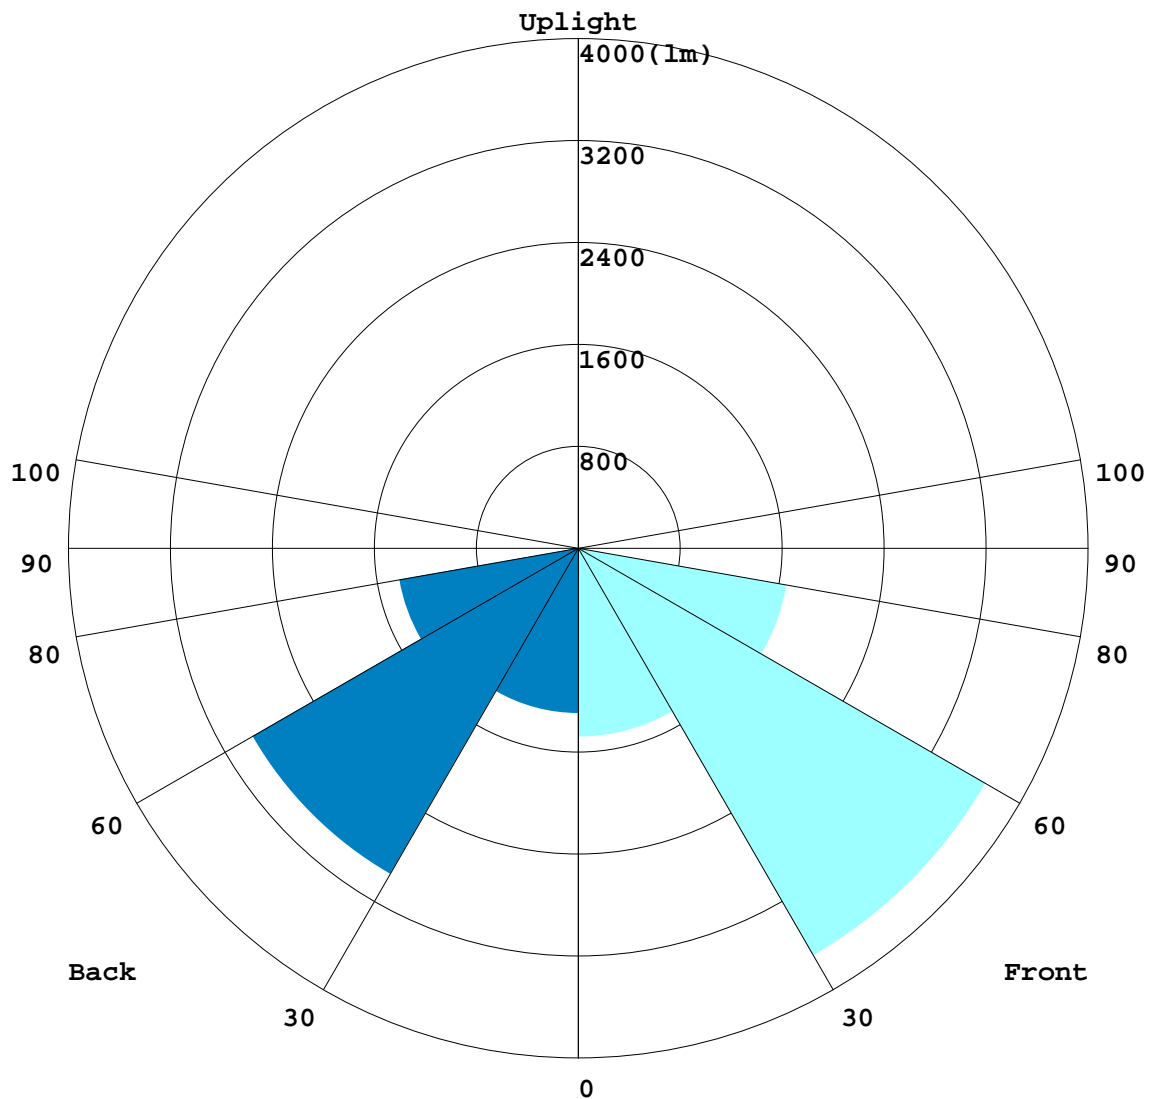

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.10.31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

BUG REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	1479.2	11.7
FM - Front-Medium(30-60)	3689.4	29.3
FH - Front-High(60-80)	1660.9	13.2
FVH - Front-Very High(80-90)	48.566	0.4
Total Forward Light	6878.1	54.6

BL - Back-Low(0-30)	1294.4	10.3
BM - Back-Medium(30-60)	2951.8	23.4
BH - Back-High(60-80)	1425.9	11.3
BVH - Back-Very High(80-90)	49.953	0.4
Total Back Light	5722	45.4

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B3-U0-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	5722	0	5722
Street Side	6878.1	0	6878.1


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.10.31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

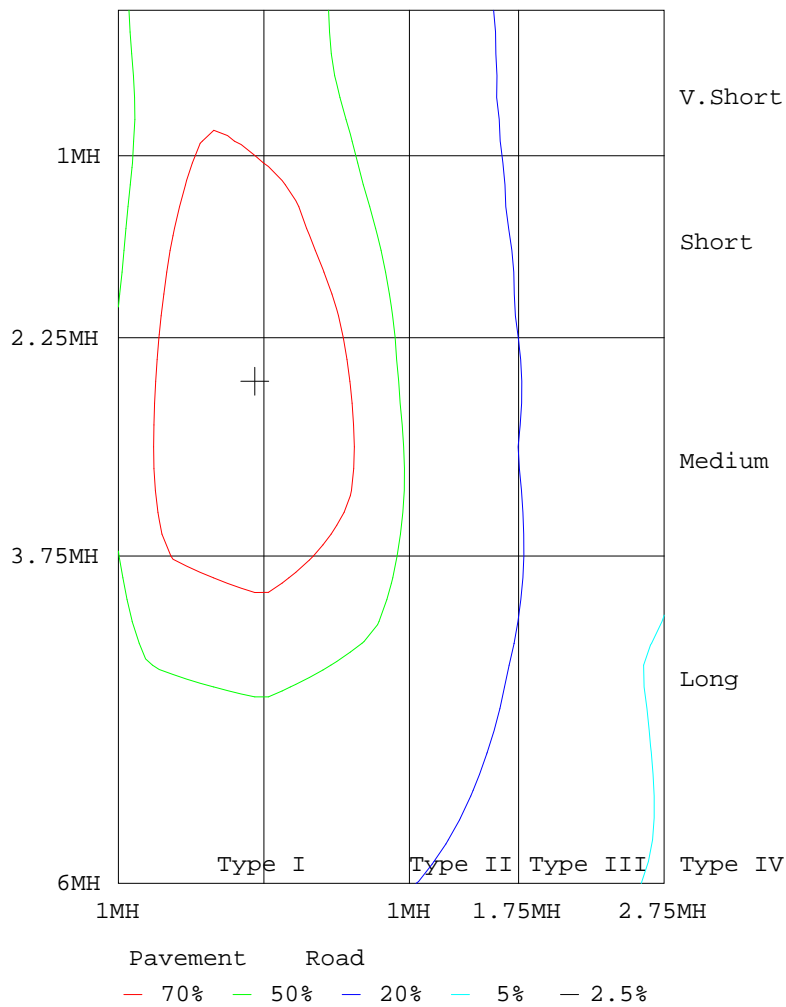

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.10.31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

