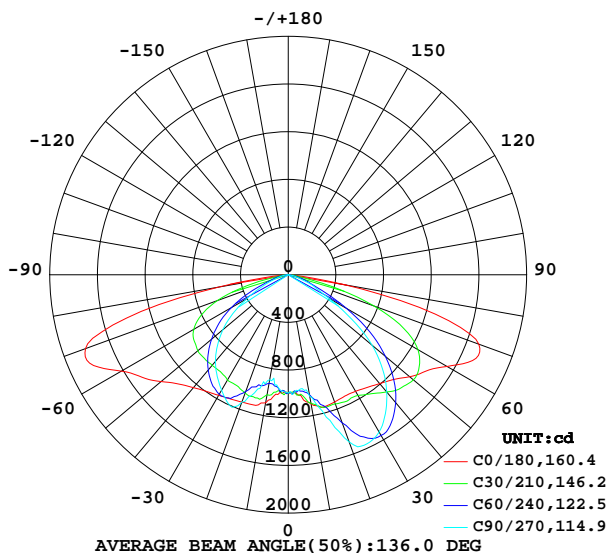
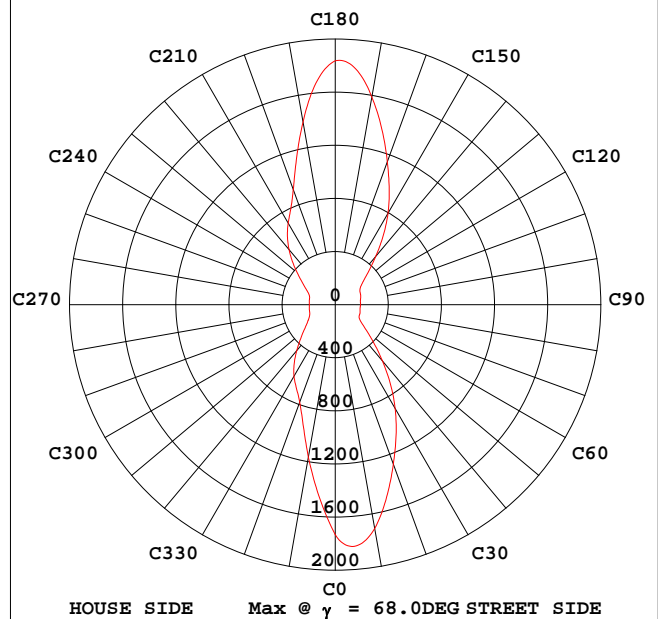


STREETLIGHT PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	ZGSM-LD37LMA 2M 5050	Imax(cd)	1836	η street_up(%)	0.0
NOMINAL POWER(W)	37	LOR(%)	100.0	η street_down(%)	54.6
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4625	η house_up(%)	0.0
NOMINAL FLUX(lm)	4625	MAXIMUM @ (C, γ)	180,68.0	η house_down(%)	45.4
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	η down(%)	100.0	SLI	22.484


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANSMAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

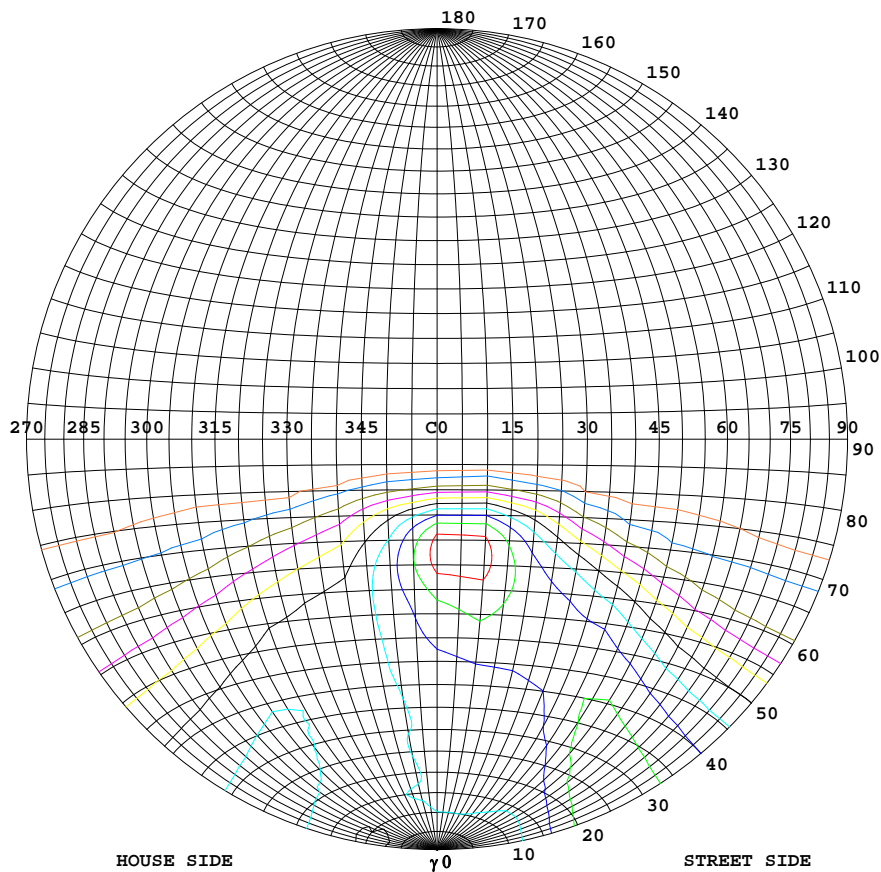



Classification:

IES:Type II - Medium
 CIE:Narrow - Intermediate
 IES:Semi cut-off
 CIE:Non-cut-off
 Max.At80:127.2cd/klm
 Max.At90:10.29cd/klm
 Max.80-90:127.2cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	1836
90%	1653
80%	1469
70%	1285
60%	1102
50%	918
40%	735
30%	551
20%	367
10%	184
5%	92

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

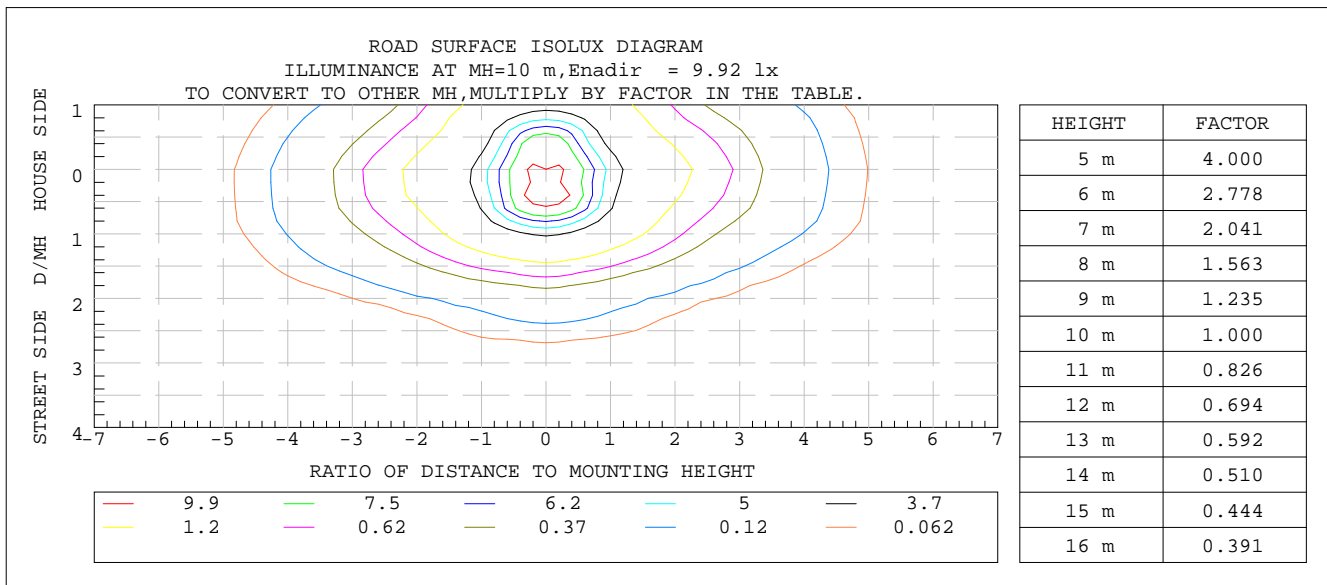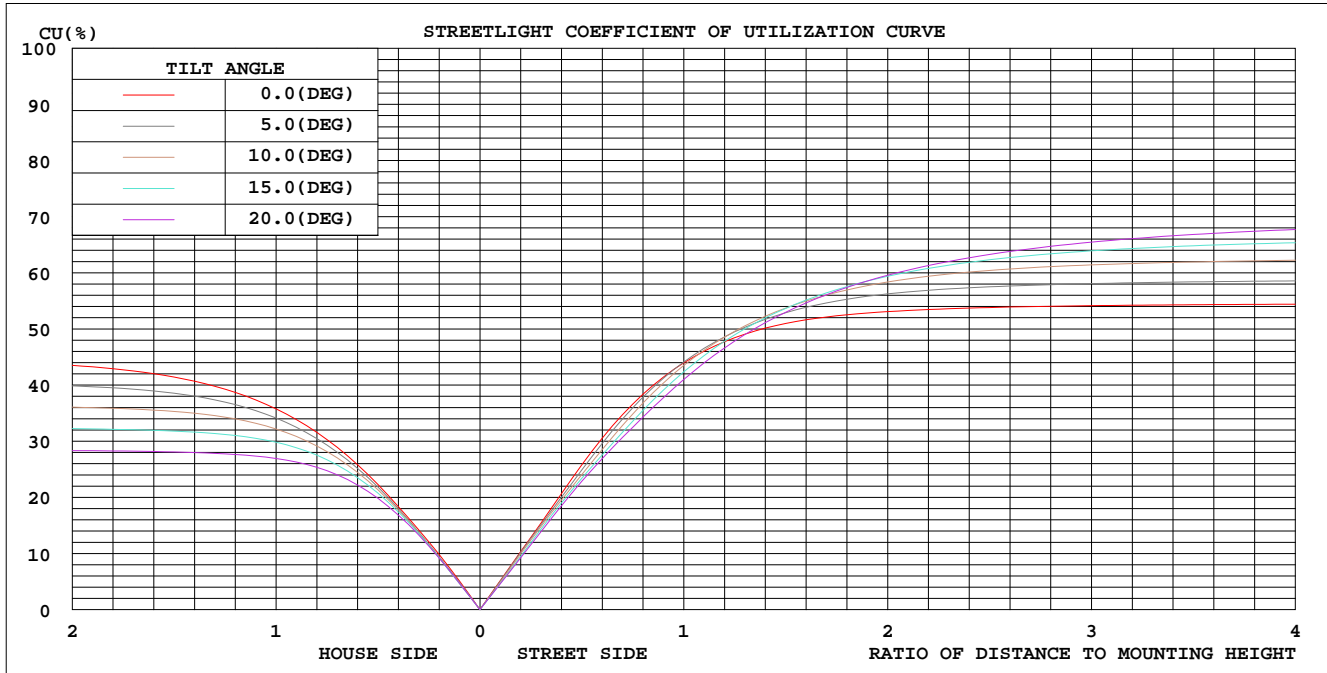COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	1099	1058	1034	1023	1091	984.2	895.4	975.2	0- 10	94.57	94.57	2.04,2.04
20	1136	1185	1490	1216	1138	1018	1136	1017	10- 20	312.0	406.6	8.79,8.79
30	1130	1399	1525	1462	1168	1058	1119	1109	20- 30	565.3	971.9	21,21
40	1193	1474	1286	1474	1237	1080	950.5	1091	30- 40	764.7	1737	37.5,37.5
50	1331	1303	917.3	1252	1394	975.3	715.1	939.1	40- 50	876.5	2613	56.5,56.5
60	1538	907.2	393.1	823.0	1617	755.5	400.9	684.6	50- 60	863.4	3476	75.2,75.2
70	1700	320.7	127.4	279.8	1809	371.2	144.9	302.5	60- 70	706.7	4183	90.4,90.4
80	468.6	60.21	31.26	61.80	588.1	73.64	45.02	66.48	70- 80	389.0	4572	98.9,98.9
90	13.29	16.59	2.945	13.54	14.11	14.99	3.126	12.82	80- 90	52.93	4625	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

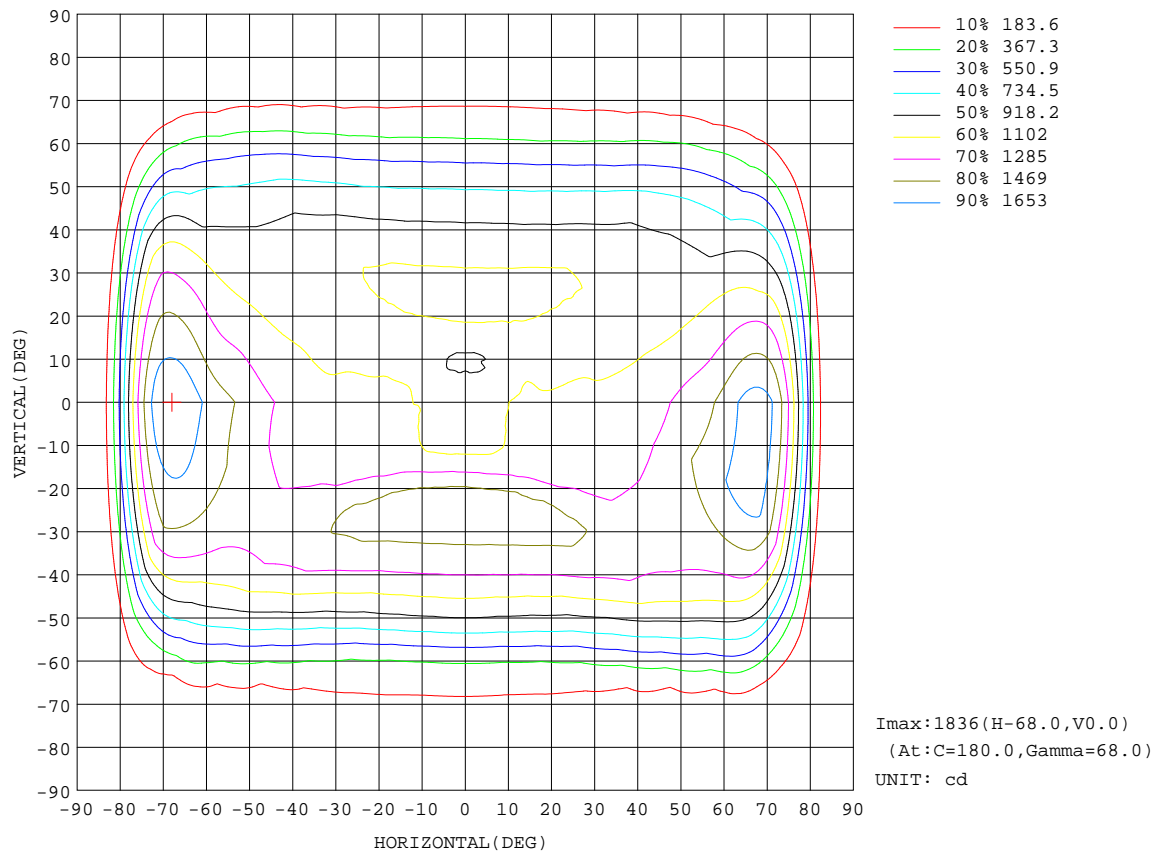

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

Planar Illuminance Curve

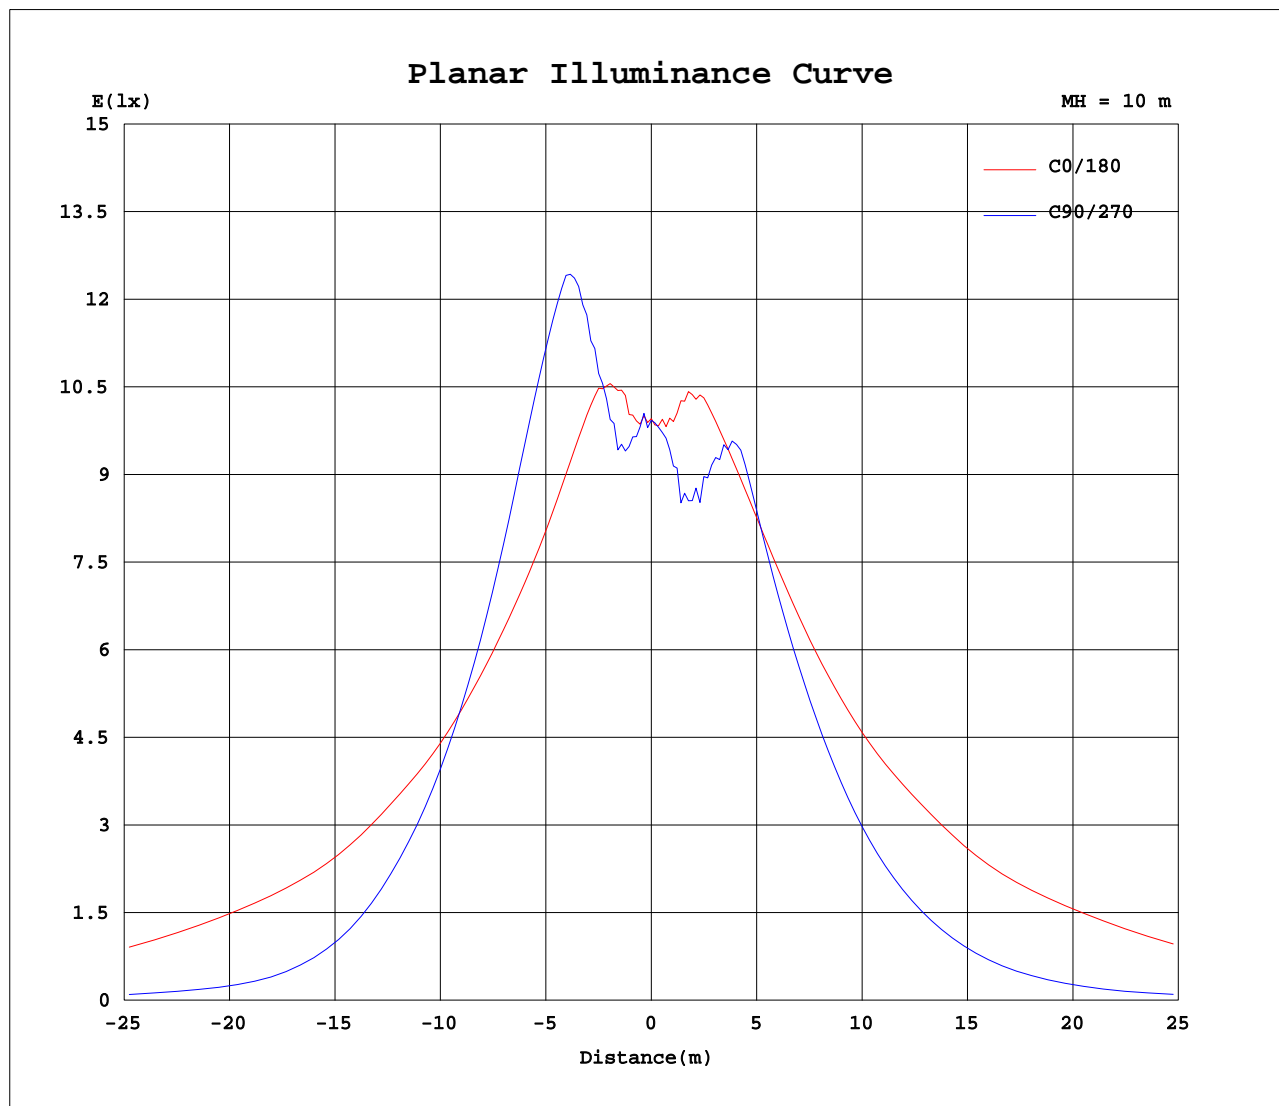


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

LCS REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

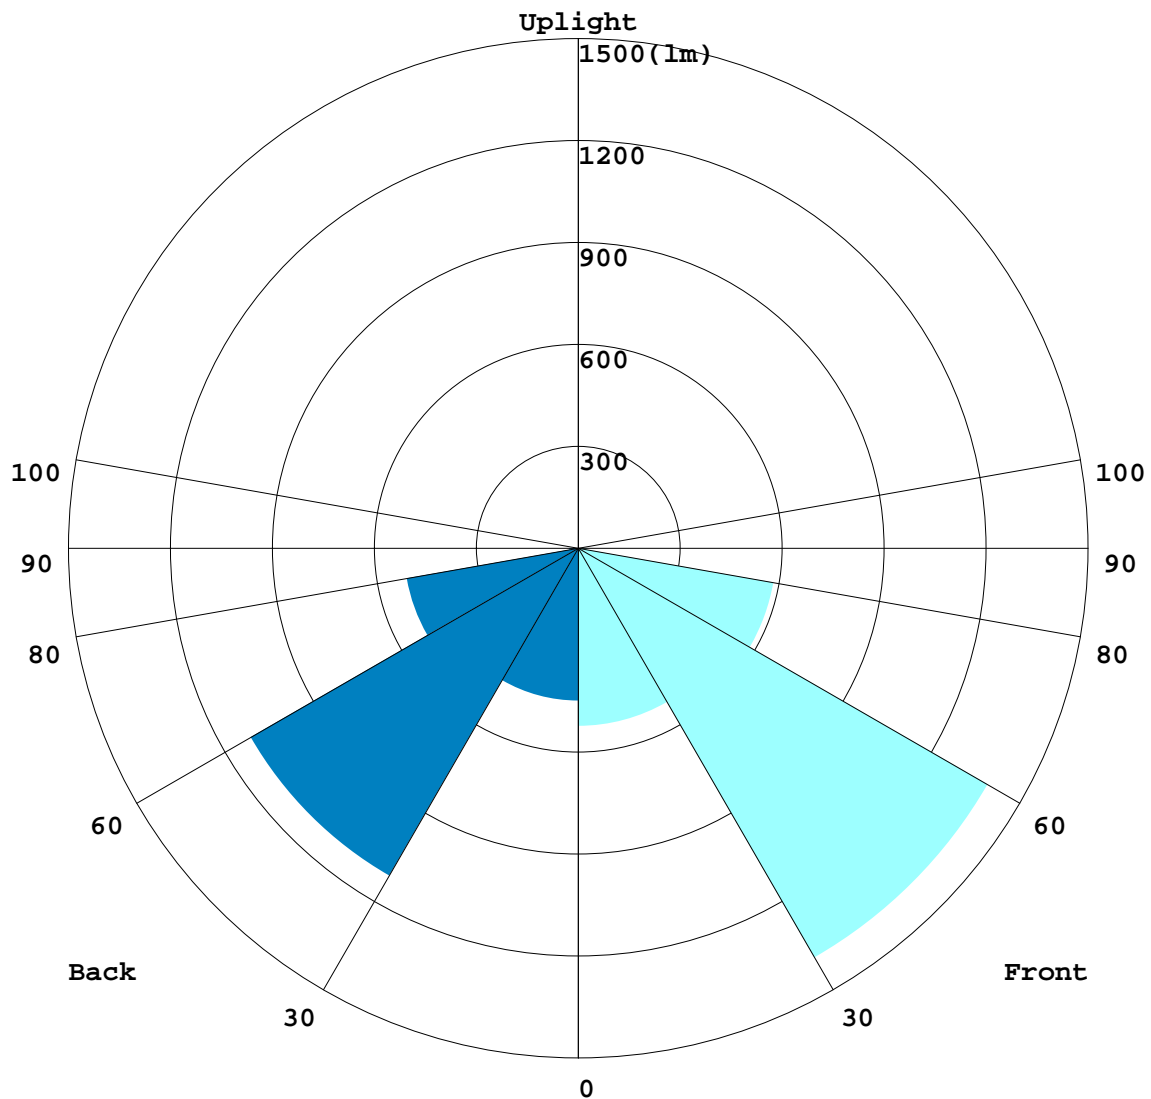

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

BUG REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	523.12	11.3
FM - Front-Medium(30-60)	1391.4	30.1
FH - Front-High(60-80)	583.36	12.6
FVH - Front-Very High(80-90)	26.181	0.6
Total Forward Light	2524.1	54.6

BL - Back-Low(0-30)	448.82	9.7
BM - Back-Medium(30-60)	1113.1	24.1
BH - Back-High(60-80)	512.29	11.1
BVH - Back-Very High(80-90)	26.747	0.6
Total Back Light	2101	45.4

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B2-U0-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	2101	0	2101
Street Side	2524.1	0	2524.1


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

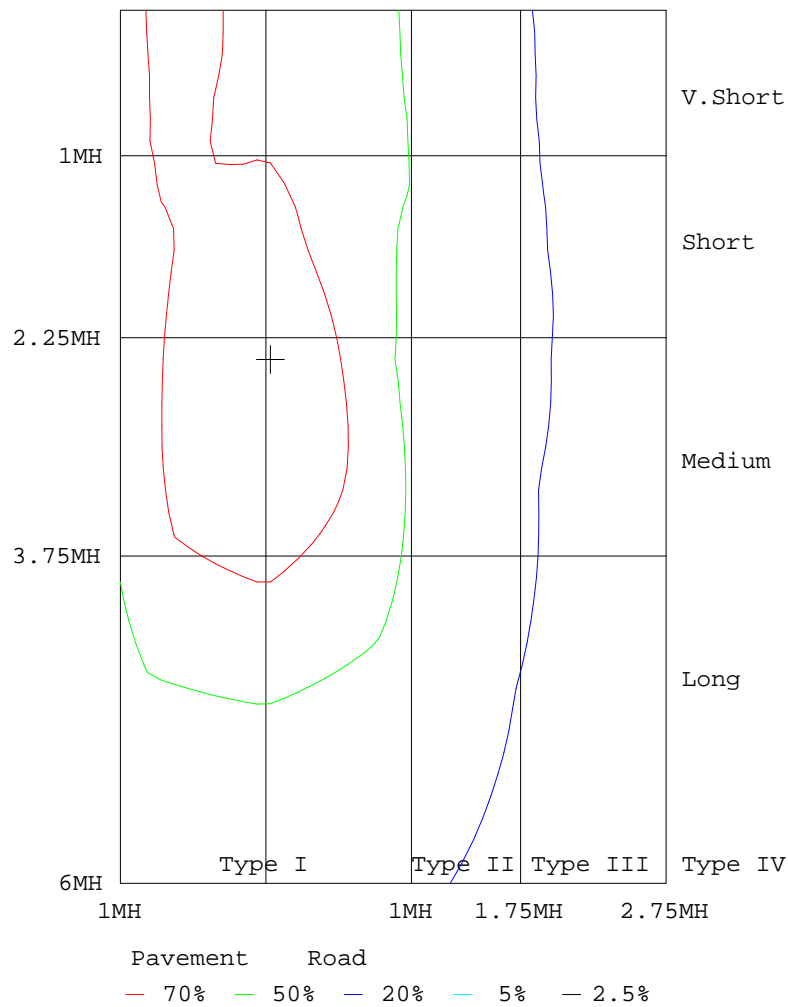

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

