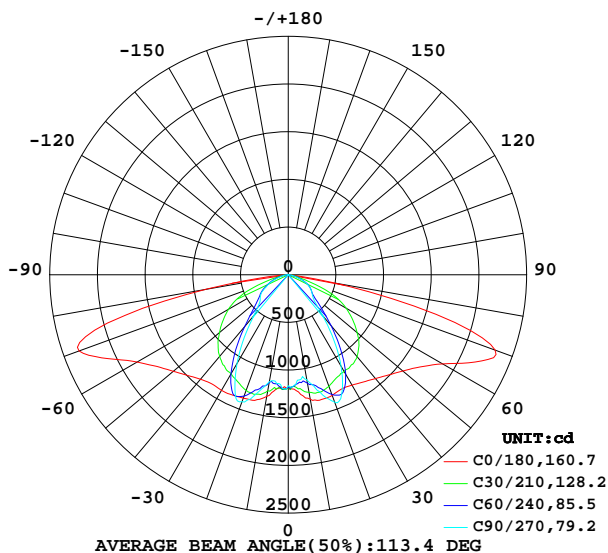
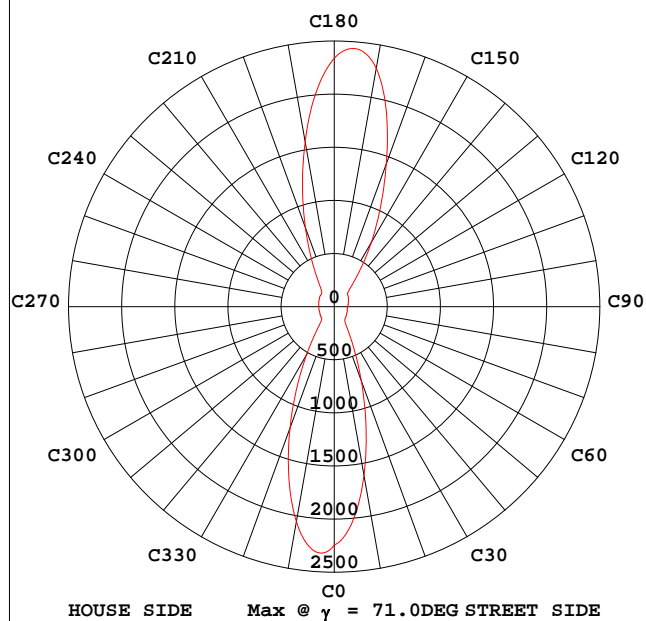


STREETLIGHT PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 115.00 lm/W			
MODEL:ZGSM-LD37LMA 1M SYMMETRY		Imax(cd)	2337	η street_up(%)	0.0
NOMINAL POWER(W)	37	LOR(%)	100.0	η street_down(%)	49.9
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4255	η house_up(%)	0.0
NOMINAL FLUX(lm)	4255	MAXIMUM @(C, γ)	180,71.0	η house_down(%)	50.1
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	η down(%)	100.0	SLI	22.386


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANSMAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

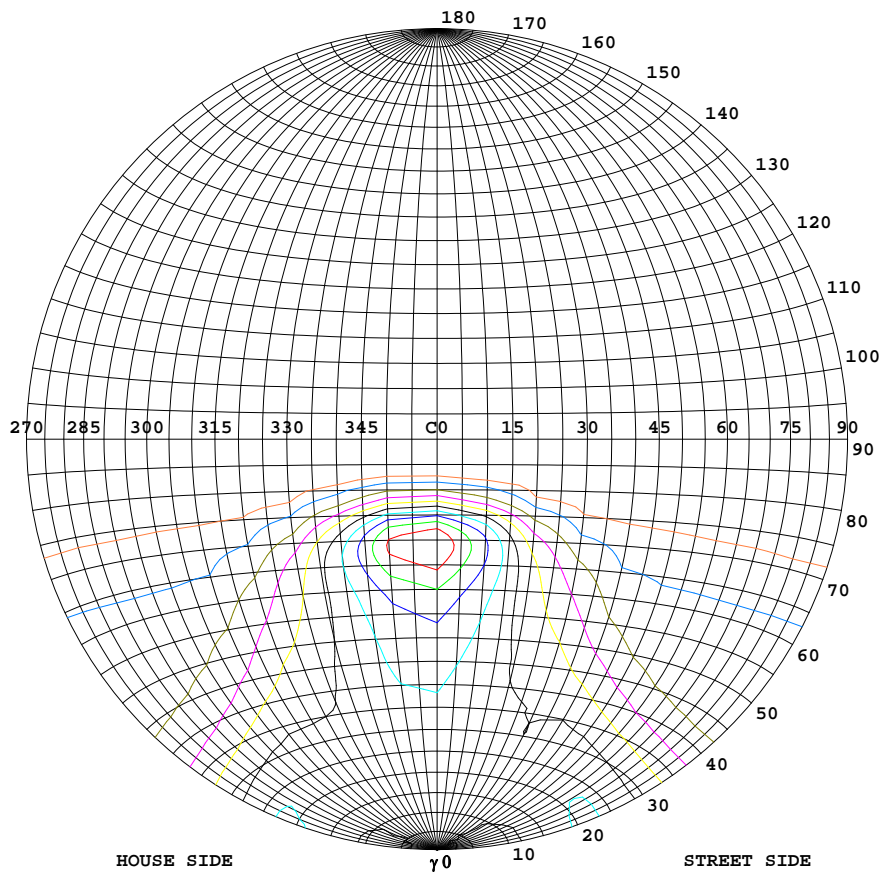



Classification:

IES:Type II - Medium
 CIE:Narrow - Long
 IES:None cut-off
 CIE:Non-cut-off
 Max.At80:211.4cd/klm
 Max.At90:12.41cd/klm
 Max.80-90:211.4cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	2337
90%	2104
80%	1870
70%	1636
60%	1402
50%	1169
40%	935
30%	701
20%	467
10%	234
5%	117

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.11.16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

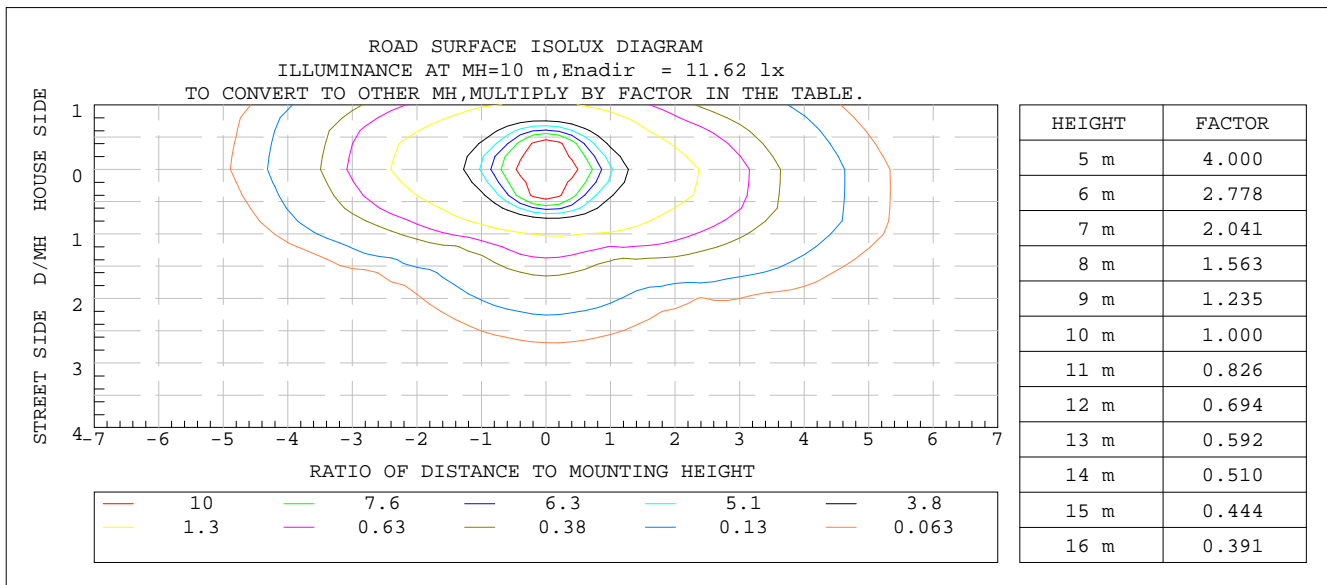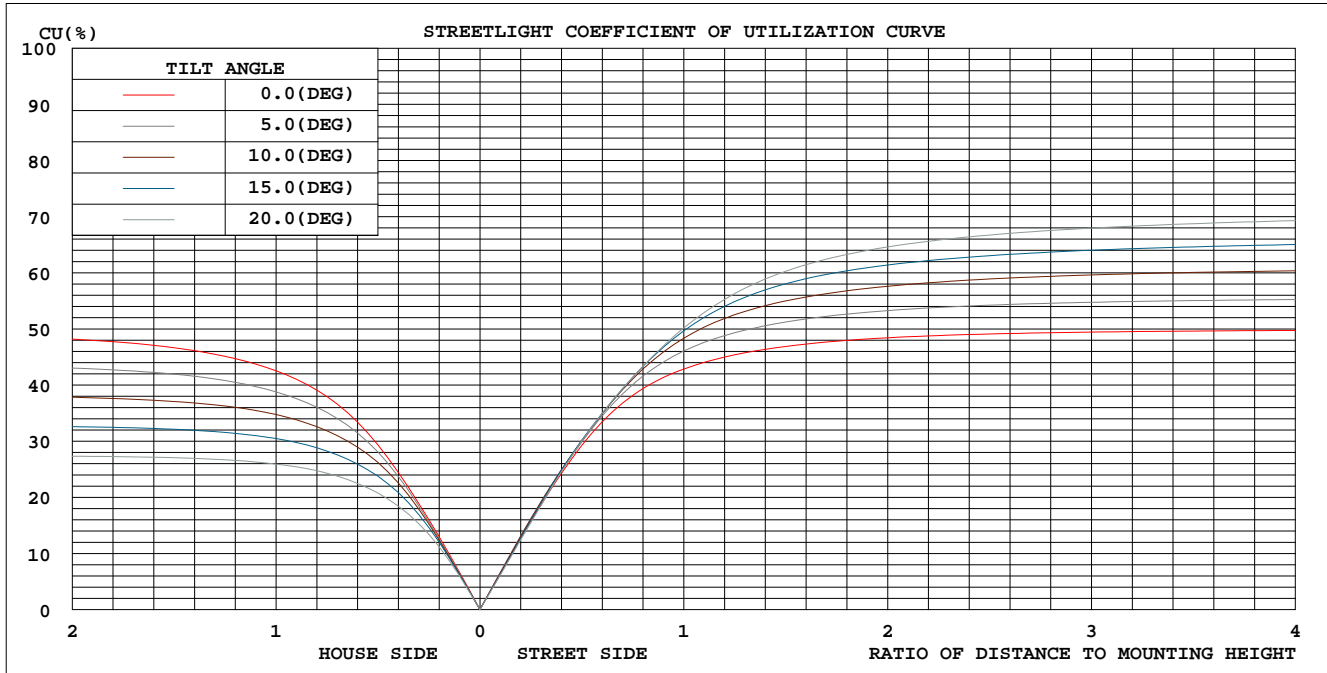COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.11.16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	1324	1197	1117	1171	1295	1183	1140	1242	0- 10	113.2	113.2	2.66,2.66
20	1346	1249	1423	1236	1377	1282	1418	1260	10- 20	362.3	475.6	11.2,11.2
30	1337	1240	1108	1237	1399	1254	1075	1210	20- 30	597.8	1073	25.2,25.2
40	1422	943.6	571.0	1077	1431	948.0	567.7	1019	30- 40	685.6	1759	41.3,41.3
50	1571	559.8	331.7	761.7	1575	605.1	383.9	727.4	40- 50	668.4	2427	57,57
60	1871	321.3	259.5	480.0	1831	379.7	283.6	471.3	50- 60	664.2	3092	72.7,72.7
70	2307	164.1	141.2	234.0	2335	190.8	158.1	207.8	60- 70	670.9	3762	88.4,88.4
80	467.8	47.47	38.13	66.32	858.7	66.98	46.46	57.27	70- 80	435.2	4198	98.7,98.7
90	22.55	13.53	3.264	17.13	21.90	12.98	3.339	16.71	80- 90	57.41	4255	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

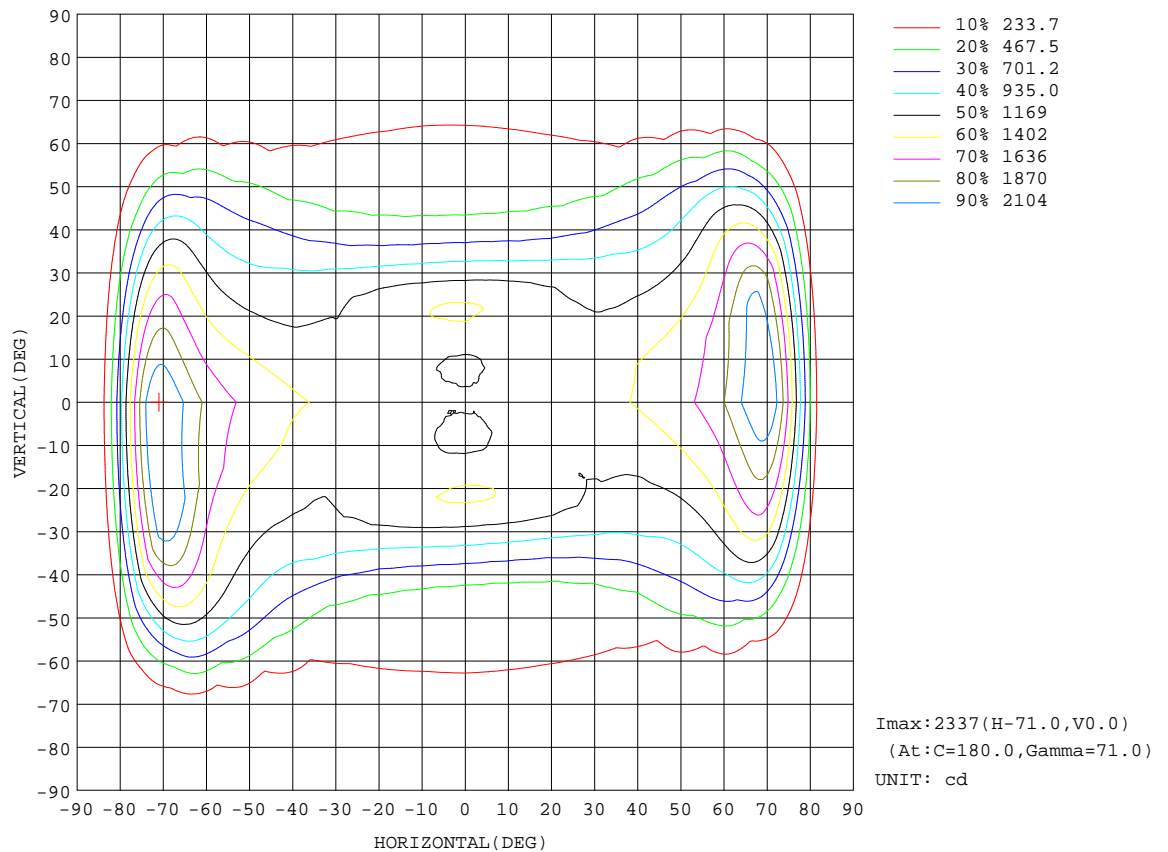

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

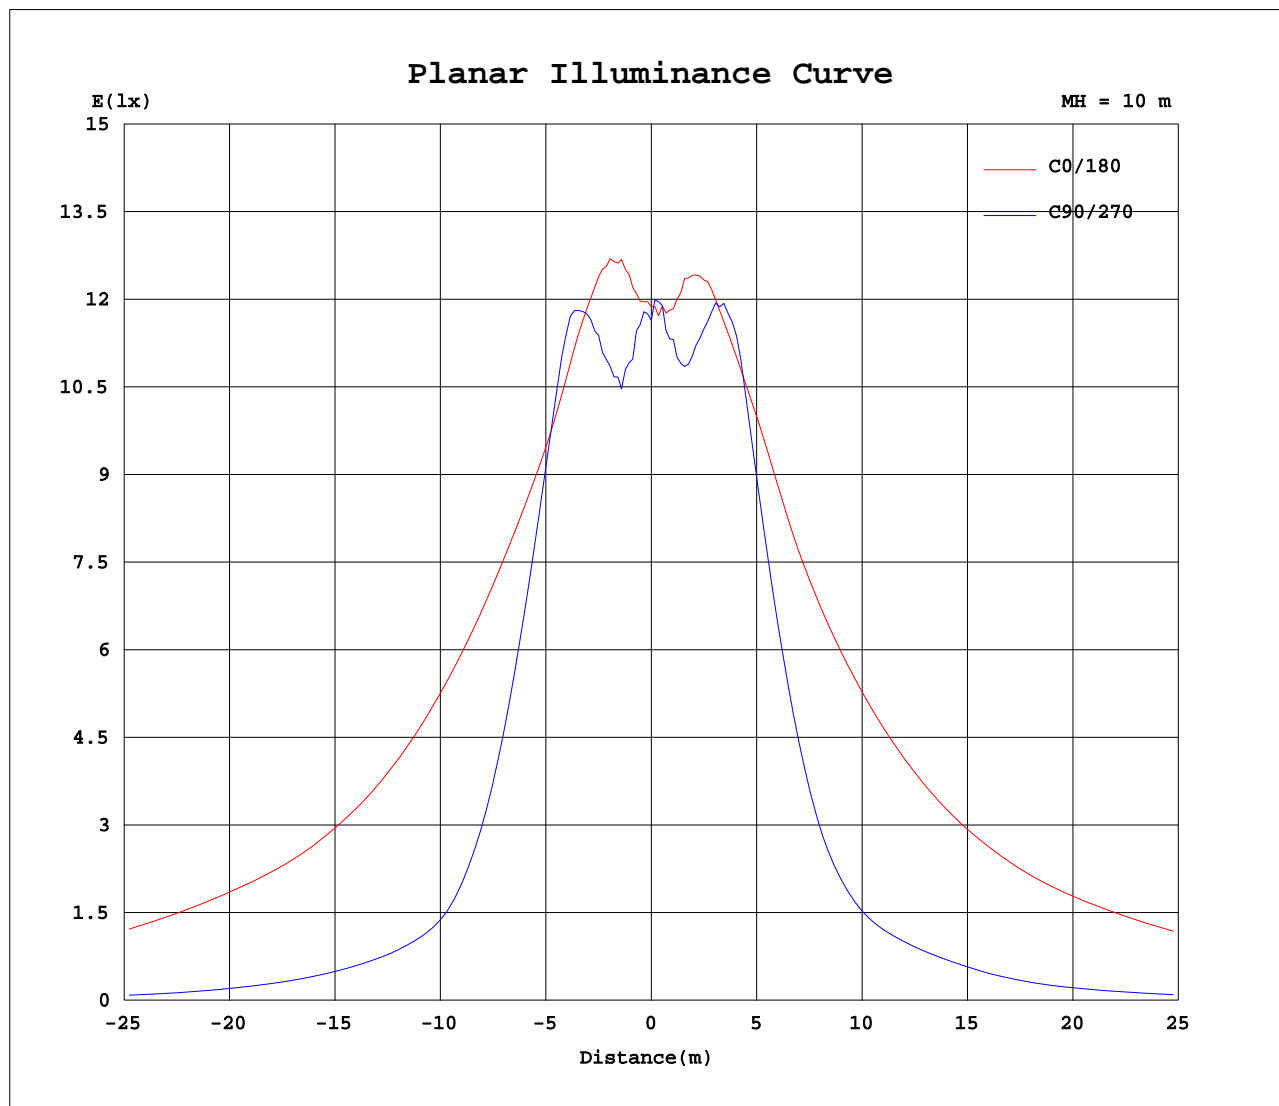


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.11.16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

LCS REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

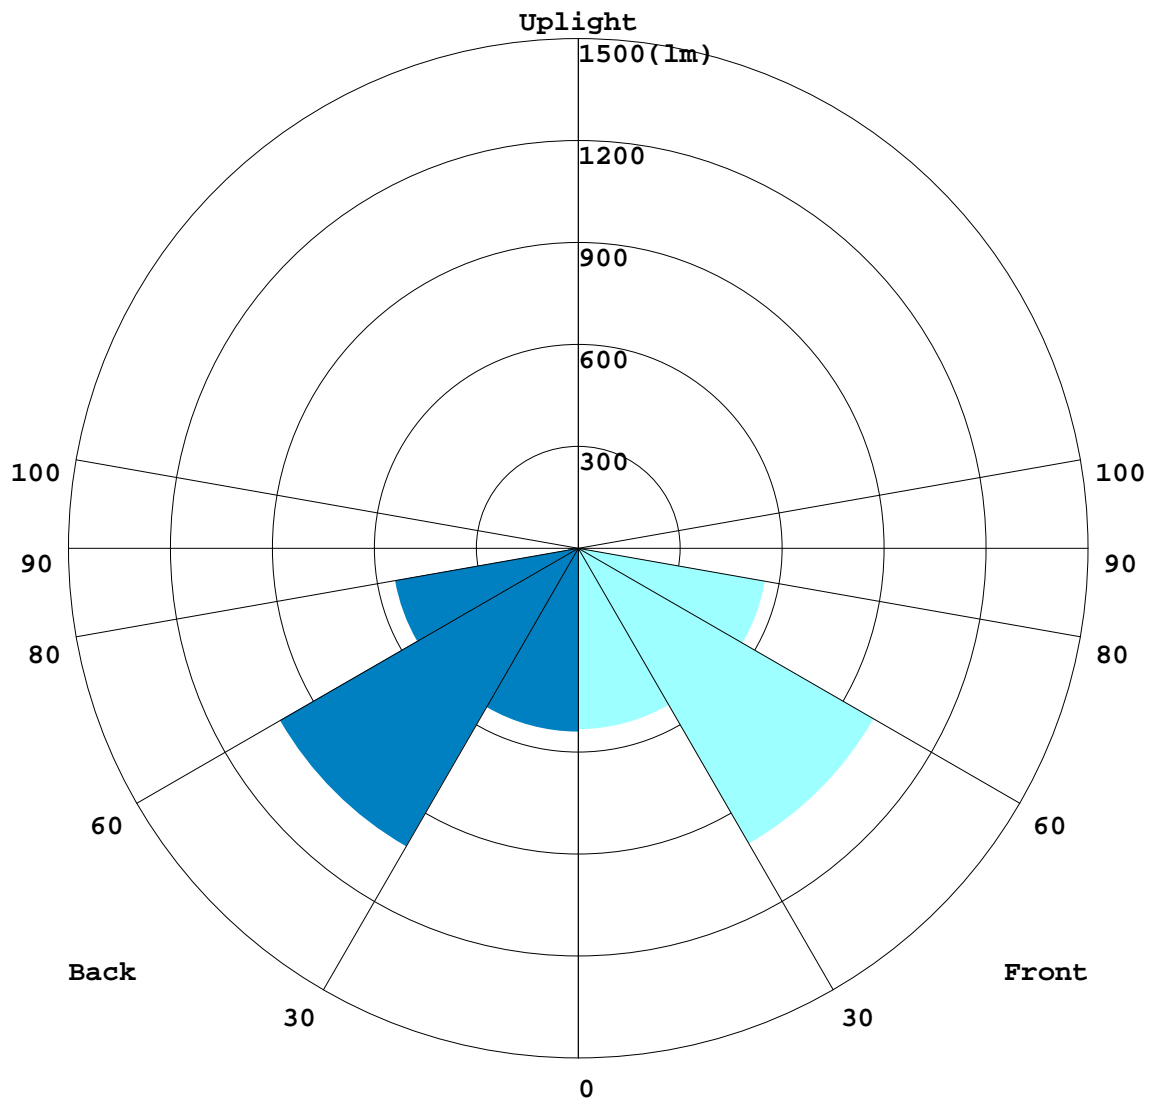

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

BUG REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	533.35	12.5
FM - Front-Medium(30-60)	1004.7	23.6
FH - Front-High(60-80)	558.73	13.1
FVH - Front-Very High(80-90)	27.911	0.7
Total Forward Light	2124.6	49.9

BL - Back-Low(0-30)	540	12.7
BM - Back-Medium(30-60)	1013.6	23.8
BH - Back-High(60-80)	547.38	12.9
BVH - Back-Very High(80-90)	29.498	0.7
Total Back Light	2130.5	50.1

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B2-U0-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	2130.5	0	2130.5
Street Side	2124.6	0	2124.6


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

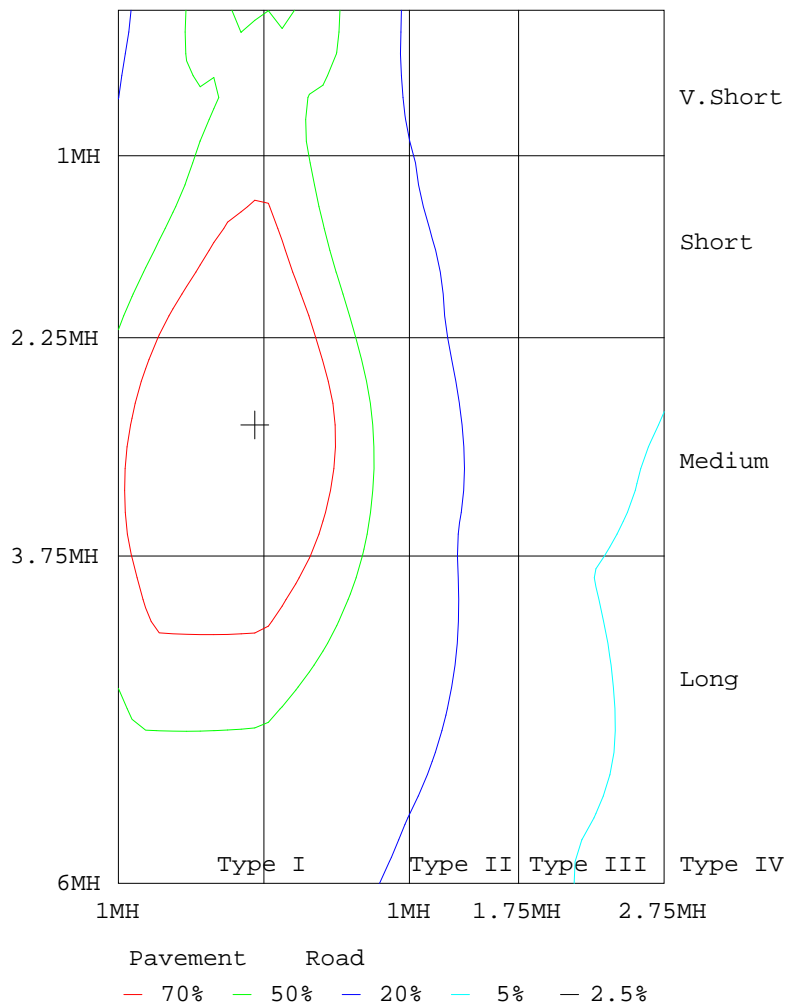

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

