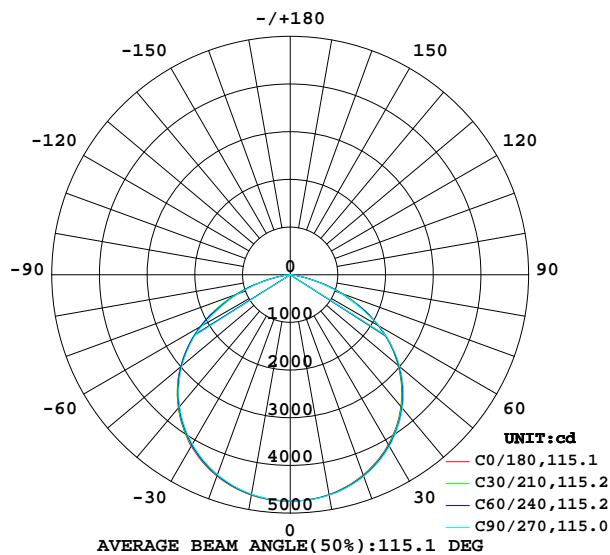
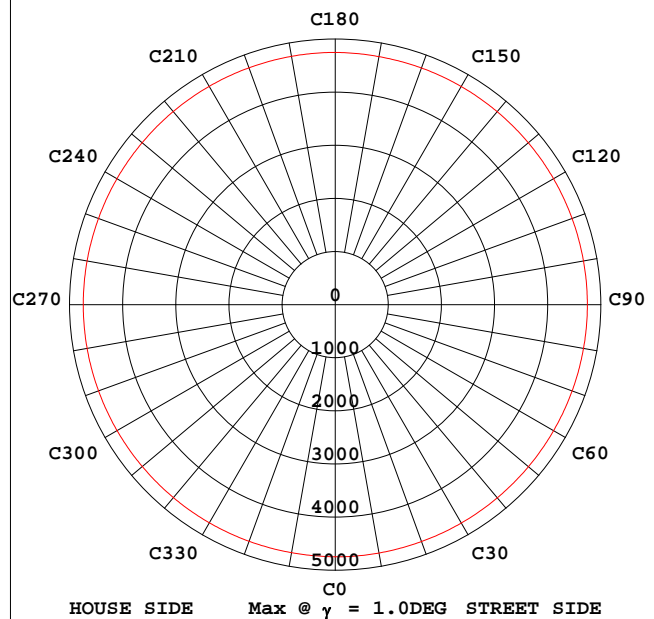


## STREETLIGHT PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 150.00 lm/W			
MODEL	LD90LMX 5S 3030	Imax(cd)	4749	$\eta$ street_up(%)	0.0
NOMINAL POWER(W)	90	LOR(%)	100.0	$\eta$ street_down(%)	50.1
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	13500	$\eta$ house_up(%)	0.0
NOMINAL FLUX(lm)	13500	MAXIMUM @(C, $\gamma$ )	180,1.0	$\eta$ house_down(%)	49.9
LAMPS INSIDE	1	$\eta$ up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	$\eta$ down(%)	100.0	SLI	21.517


INTENSITY DISTRIBUTION DIAGRAM  
IN C PLANSMAX INTENSITY CONE SURFACE  
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.10.31

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

## STREETLIGHT ISOCANDELA DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

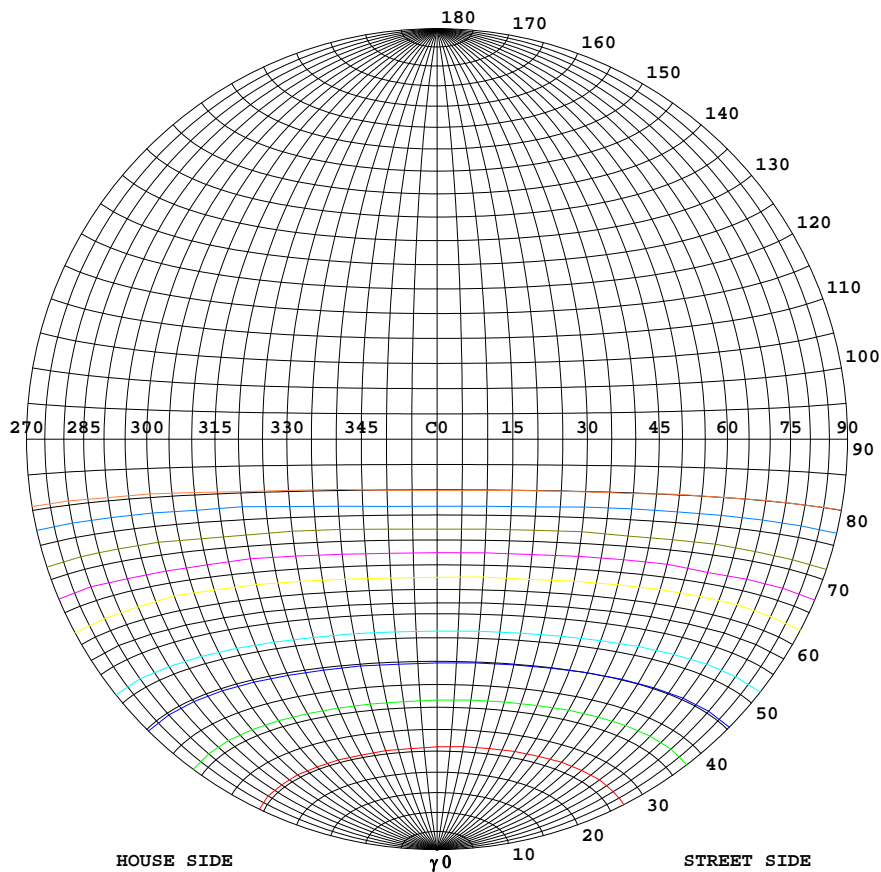


## Classification:

IES:Type V - Very Short  
 CIE:Narrow - Short  
 IES:Cut-off  
 CIE:Full cut-off  
 Max.At80:21.87cd/klm  
 Max.At90:0.3000cd/klm  
 Max.80-90:21.87cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	4749
90%	4274
80%	3799
70%	3324
60%	2849
50%	2374
40%	1899
30%	1425
20%	950
10%	475
5%	237

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2017.10.31

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.480m [K=1.0000]  
 Remarks:

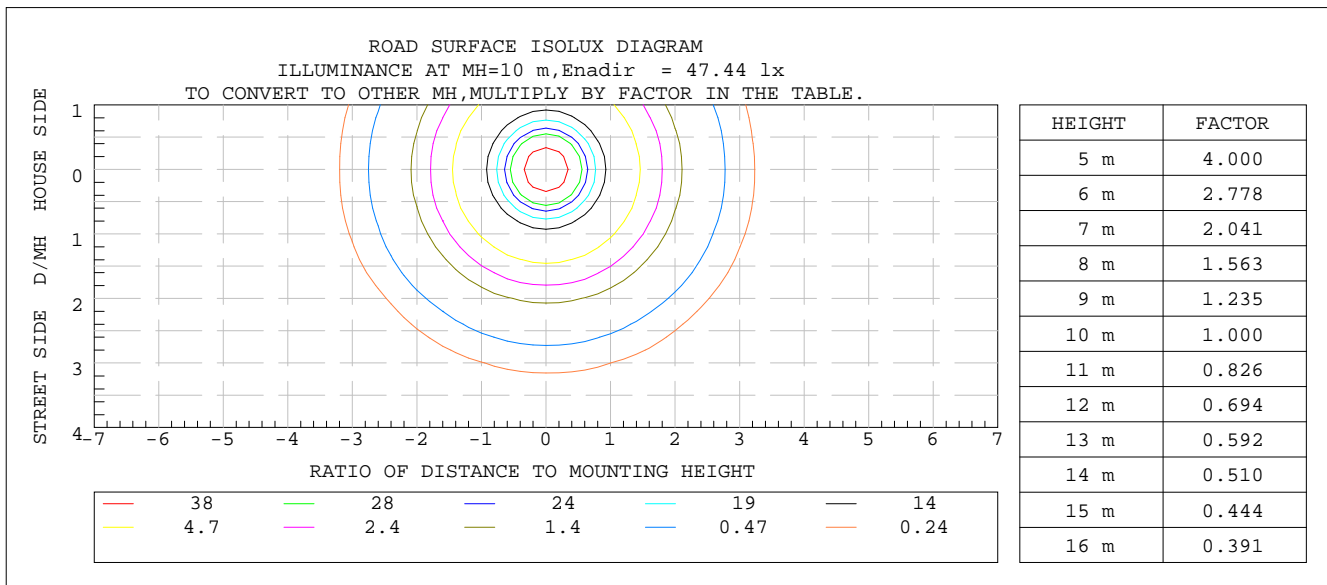COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2017.10.31

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.480m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	$\Phi$ lum,lamp
10	4680	4690	4695	4693	4695	4682	4672	4669	0- 10	450.1	450.1	3.33,3.33
20	4469	4487	4503	4501	4495	4475	4459	4454	10- 20	1299	1749	13,13
30	4114	4139	4159	4163	4154	4129	4101	4097	20- 30	1993	3743	27.7,27.7
40	3610	3636	3660	3670	3652	3631	3606	3597	30- 40	2440	6182	45.8,45.8
50	2952	2976	3000	3011	3004	2985	2958	2947	40- 50	2564	8747	64.8,64.8
60	2127	2146	2158	2188	2183	2176	2107	2139	50- 60	2311	11058	81.9,81.9
70	1167	1148	1128	1184	1218	1196	1158	1164	60- 70	1648	12706	94.1,94.1
80	227.6	236.6	241.4	247.6	244.2	273.4	272.6	260.6	70- 80	721.6	13428	99.5,99.5
90	3.343	3.411	3.318	3.321	3.932	3.919	3.907	4.025	80- 90	72.61	13500	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.10.31

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM


NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

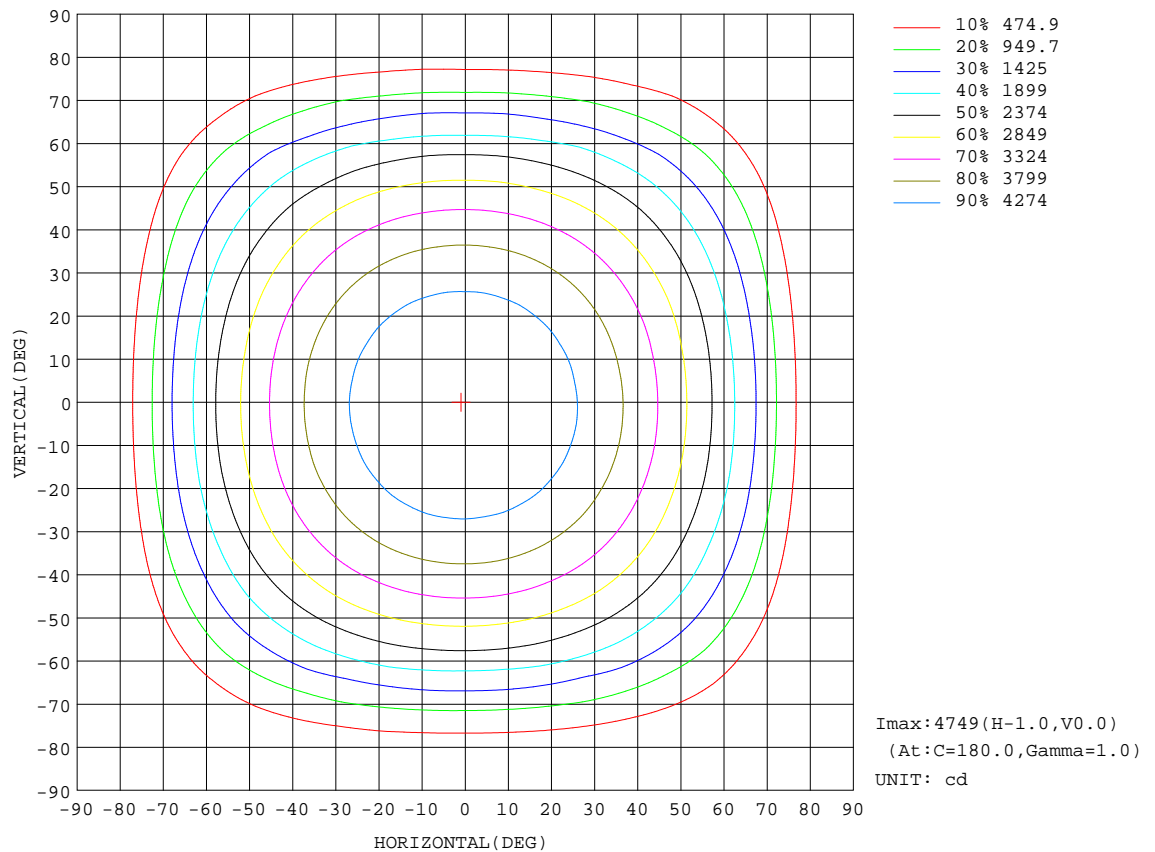

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2017.10.31

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.480m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

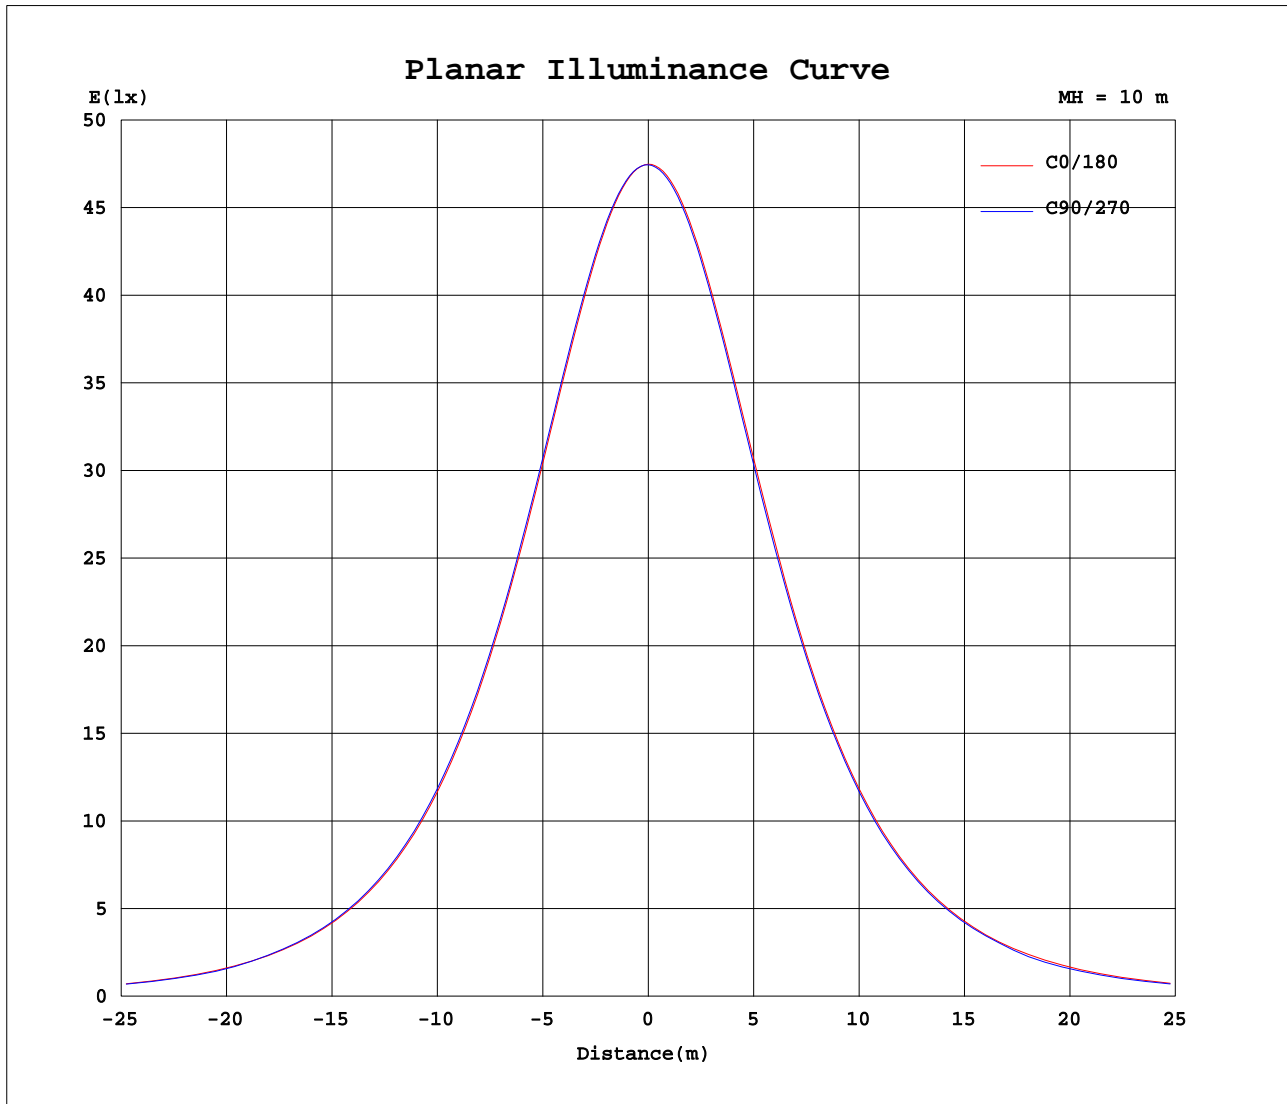


C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2017.10.31

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.480m [K=1.0000]  
Remarks:

LCS REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

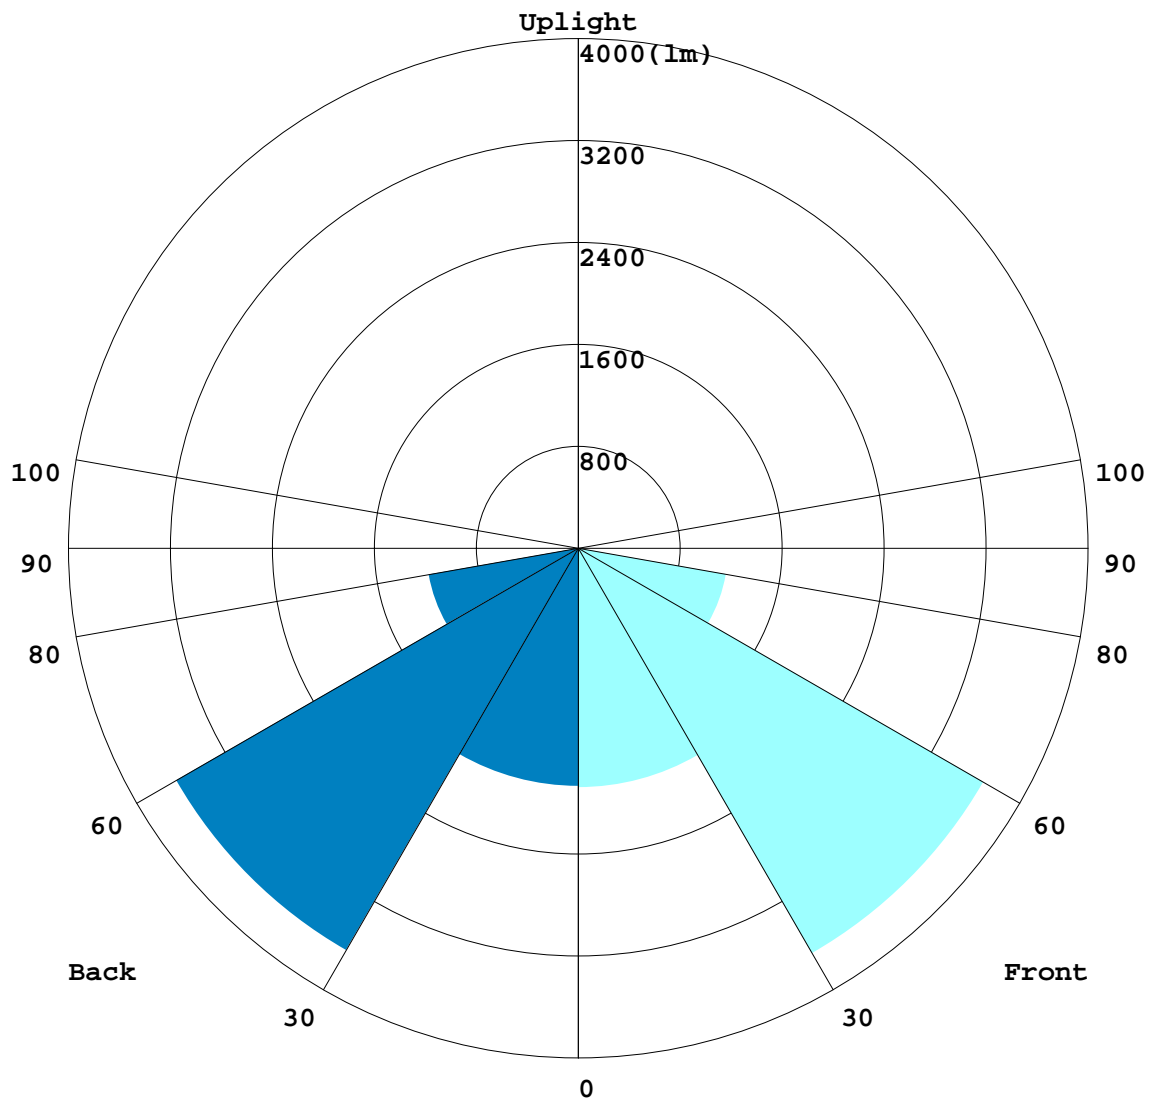

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.10.31

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

### BUG REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

#### IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	1876.4	13.9
FM - Front-Medium(30-60)	3671.4	27.2
FH - Front-High(60-80)	1178.4	8.7
FVH - Front-Very High(80-90)	33.734	0.2
Total Forward Light	6760	50.1

BL - Back-Low(0-30)	1866.3	13.8
BM - Back-Medium(30-60)	3643.5	27.0
BH - Back-High(60-80)	1191.6	8.8
BVH - Back-Very High(80-90)	38.871	0.3
Total Back Light	6740.2	49.9

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B3-U0-G1
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	6740.2	0	6740.2
Street Side	6760	0	6760

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.10.31


γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:



ROAD ISOCANDELA REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

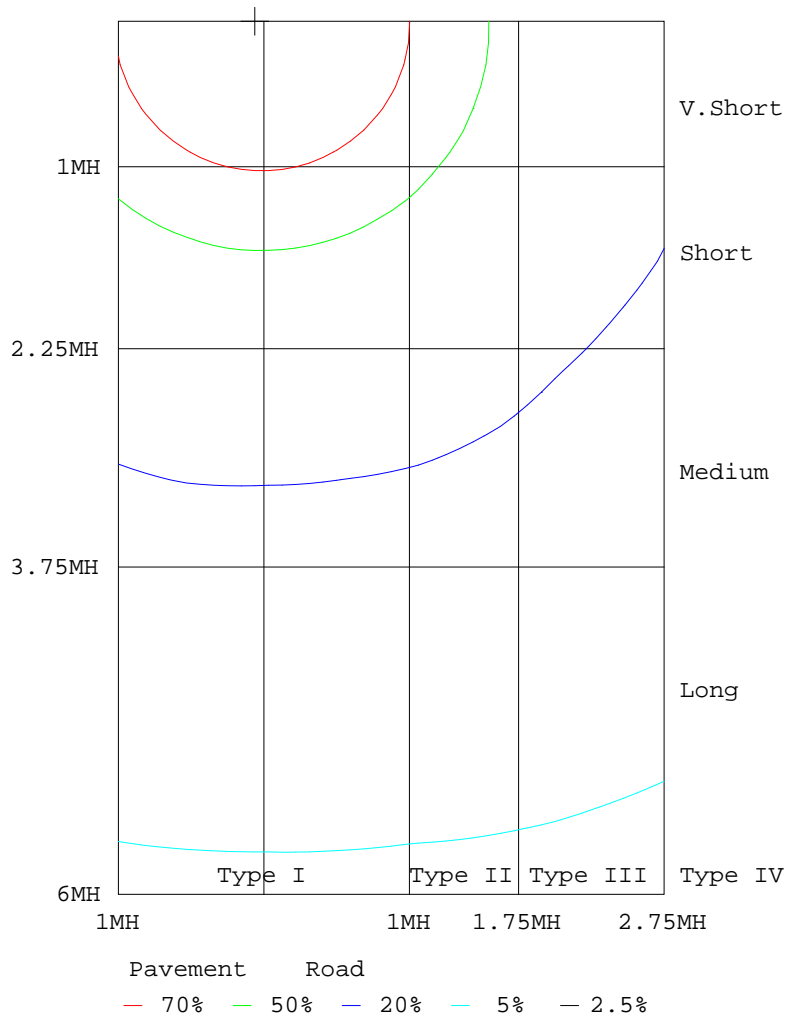

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2017.10.31

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.480m [K=1.0000]  
 Remarks:



