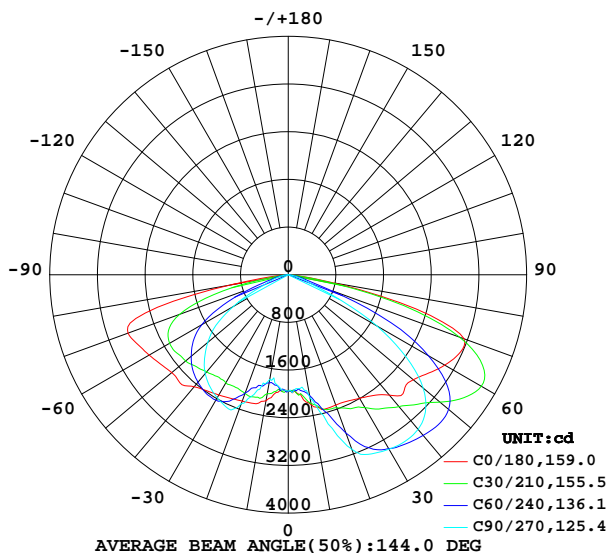
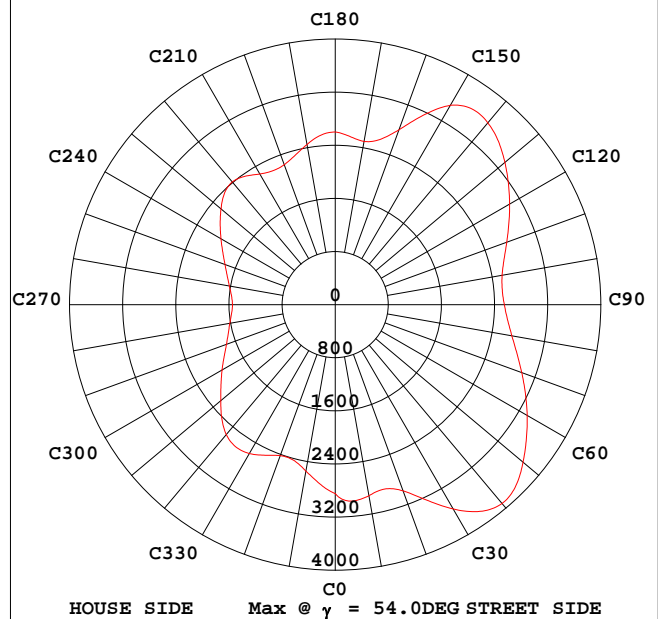


## STREETLIGHT PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	ZGSM-LD90LMA 3M 5050	Imax(cd)	3909	$\eta$ street_up(%)	0.0
NOMINAL POWER(W)	90	LOR(%)	100.0	$\eta$ street_down(%)	57.1
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	11250	$\eta$ house_up(%)	0.0
NOMINAL FLUX(lm)	11250	MAXIMUM @ (C, $\gamma$ )	40,54.0	$\eta$ house_down(%)	42.9
LAMPS INSIDE	1	$\eta$ up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	$\eta$ down(%)	100.0	SLI	23.010


INTENSITY DISTRIBUTION DIAGRAM  
IN C PLANSMAX INTENSITY CONE SURFACE  
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

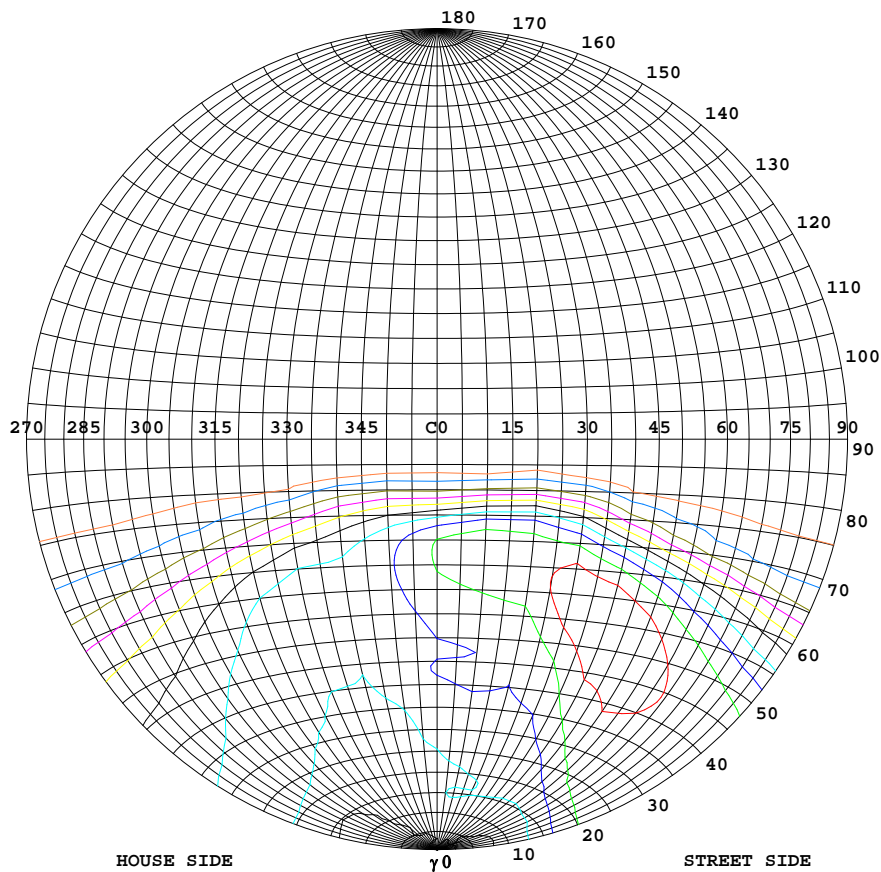



Classification:

IES:Type III - Short  
 CIE:Average - Short  
 IES:Semi cut-off  
 CIE:Non-cut-off  
 Max.At80:118.8cd/klm  
 Max.At90:8.943cd/klm  
 Max.80-90:118.8cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	3909
90%	3518
80%	3127
70%	2736
60%	2345
50%	1955
40%	1564
30%	1173
20%	782
10%	391
5%	195

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.480m [K=1.0000]  
 Remarks:

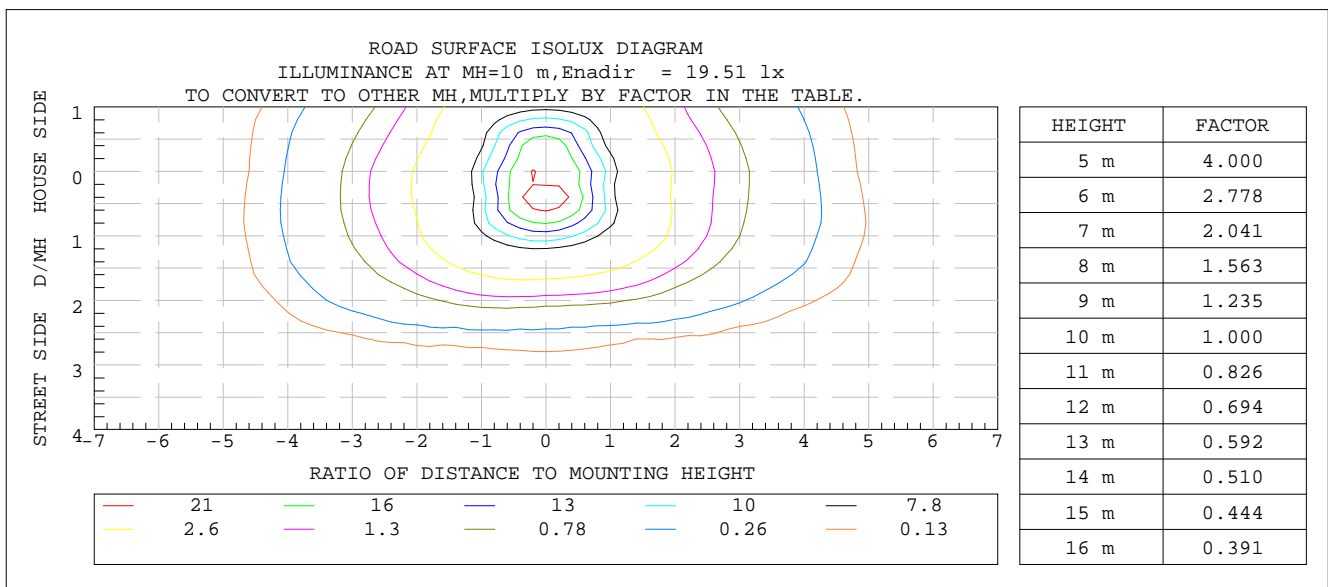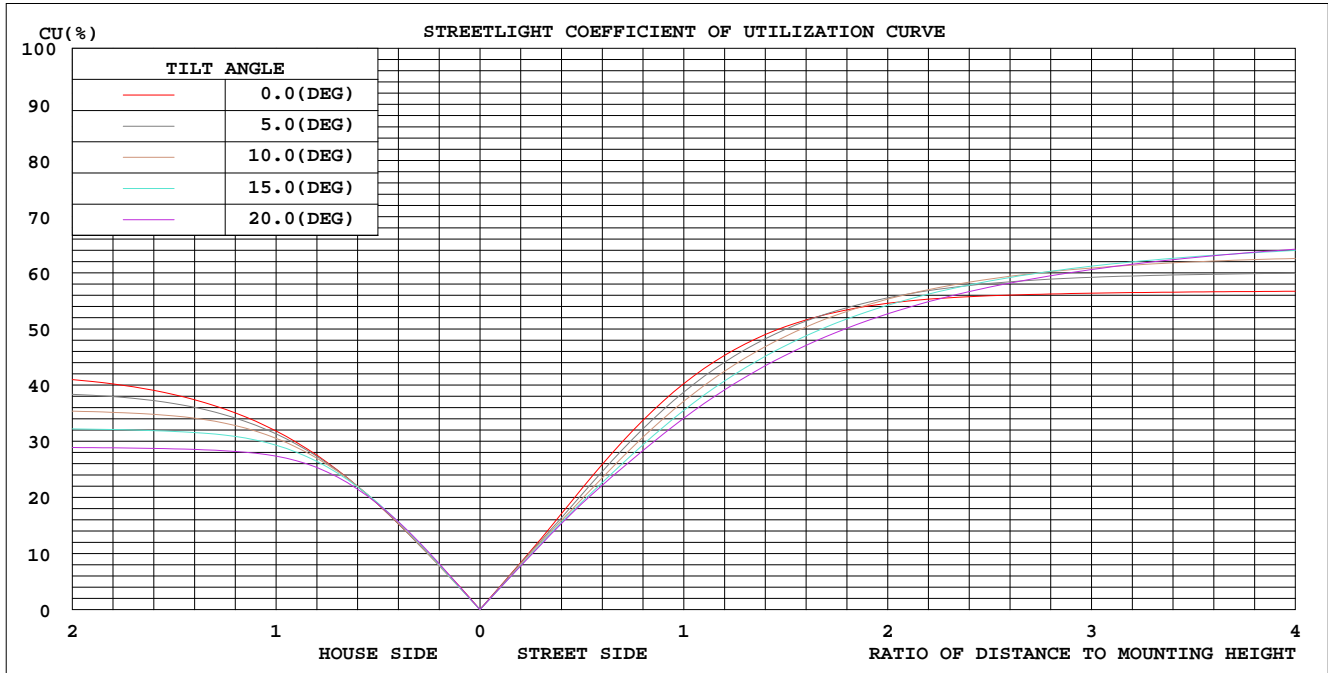COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.480m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	$\Phi$ lum,lamp
10	2213	2121	2093	2030	2147	1948	1782	1955	0- 10	187.8	187.8	1.67,1.67
20	2327	2515	3117	2534	2256	2050	2301	2096	10- 20	634.5	822.3	7.31,7.31
30	2394	3082	3381	3059	2330	2209	2384	2384	20- 30	1179	2002	17.8,17.8
40	2637	3466	3387	3313	2454	2392	2168	2558	30- 40	1688	3689	32.8,32.8
50	2740	3773	2954	3481	2554	2385	1759	2472	40- 50	2112	5801	51.6,51.6
60	3033	3515	1712	3130	2696	2169	1061	2146	50- 60	2307	8108	72.1,72.1
70	3139	1843	347.4	1536	2860	1274	338.5	1054	60- 70	1974	10082	89.6,89.6
80	703.0	179.8	83.71	191.5	989.7	194.9	106.1	161.3	70- 80	1038	11120	98.8,98.8
90	26.49	34.11	6.230	29.92	30.86	34.93	6.995	28.11	80- 90	130.4	11250	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM


NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

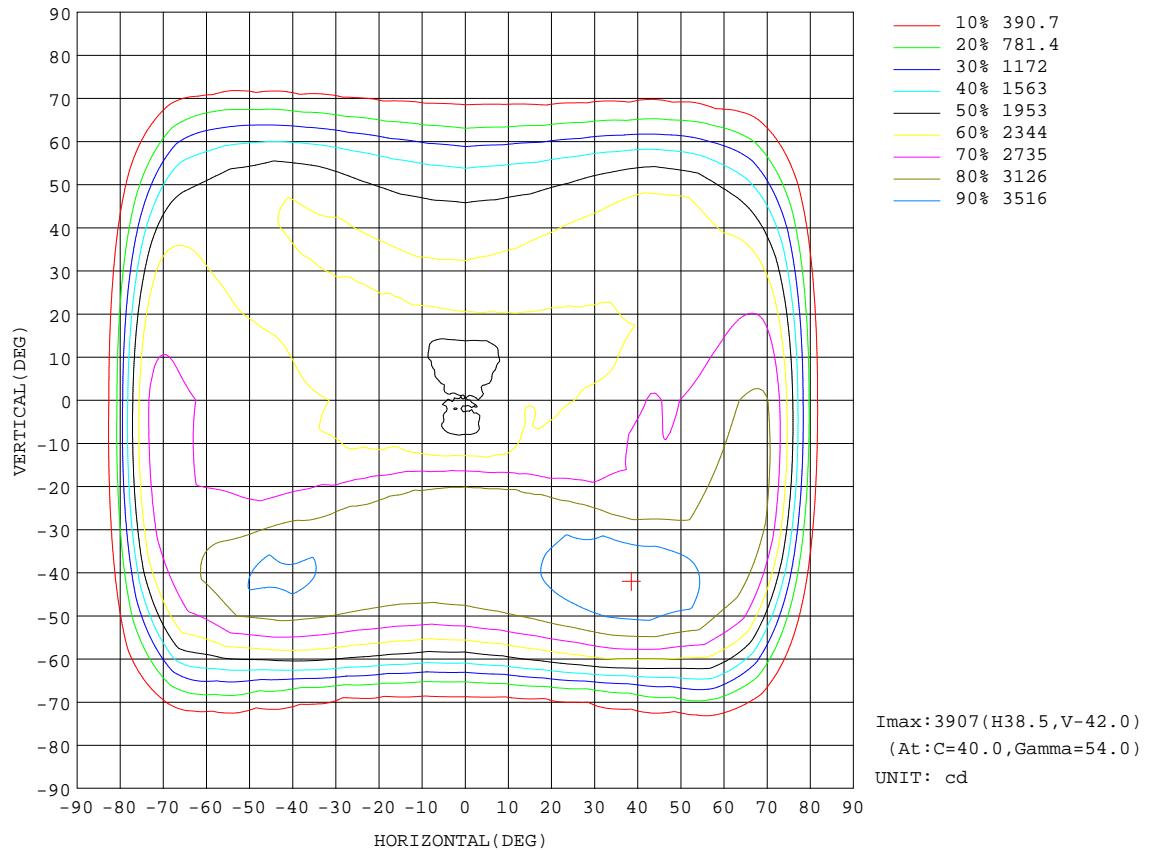

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.480m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

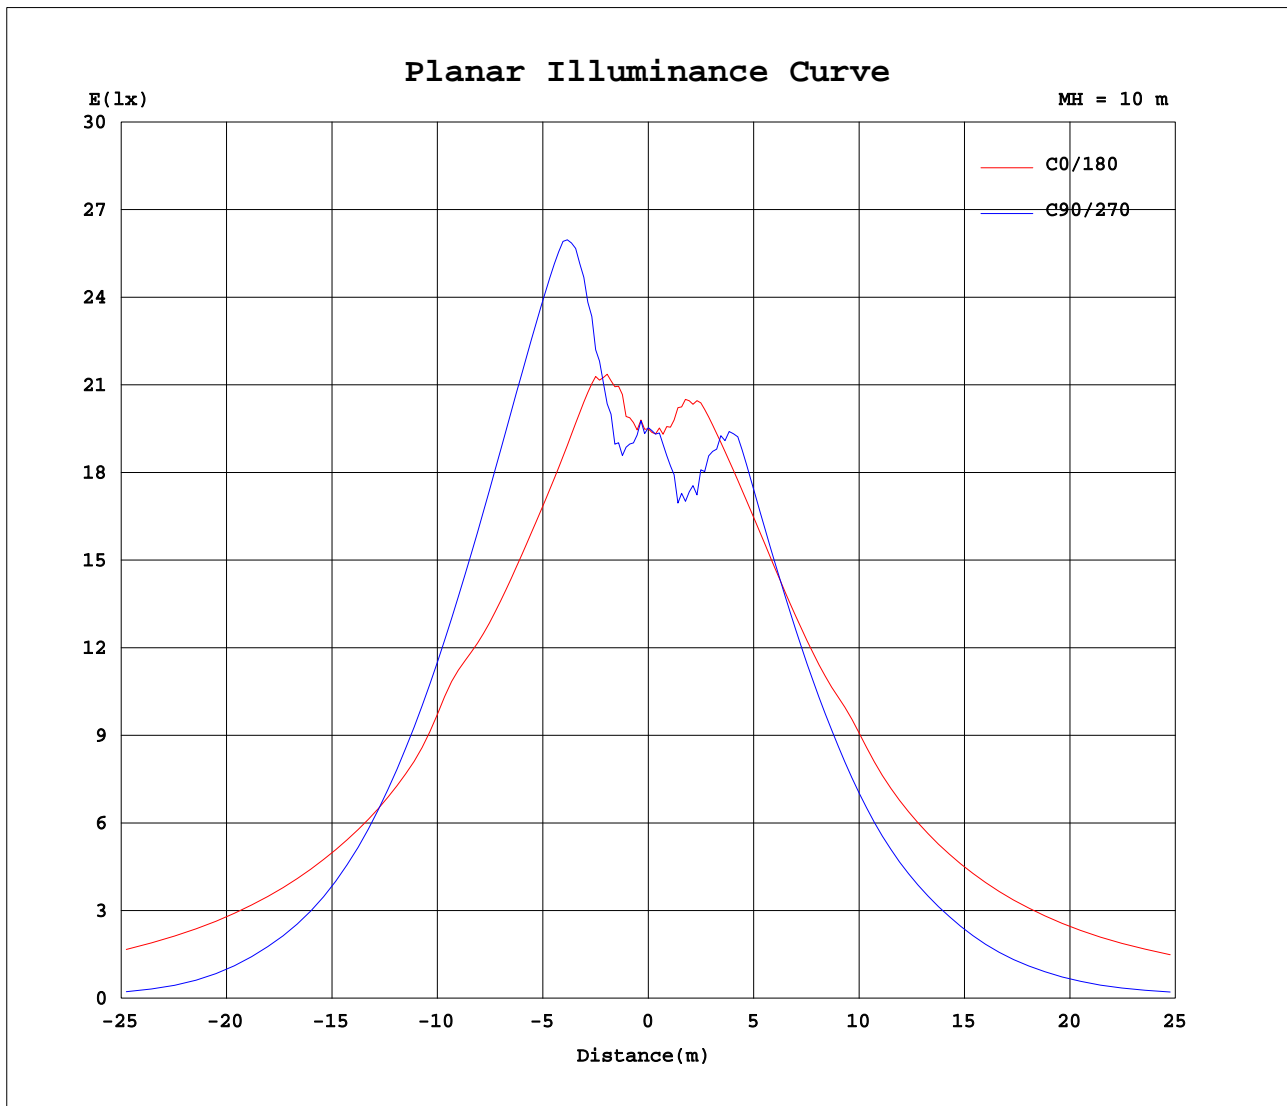


C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.480m [K=1.0000]  
Remarks:

LCS REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

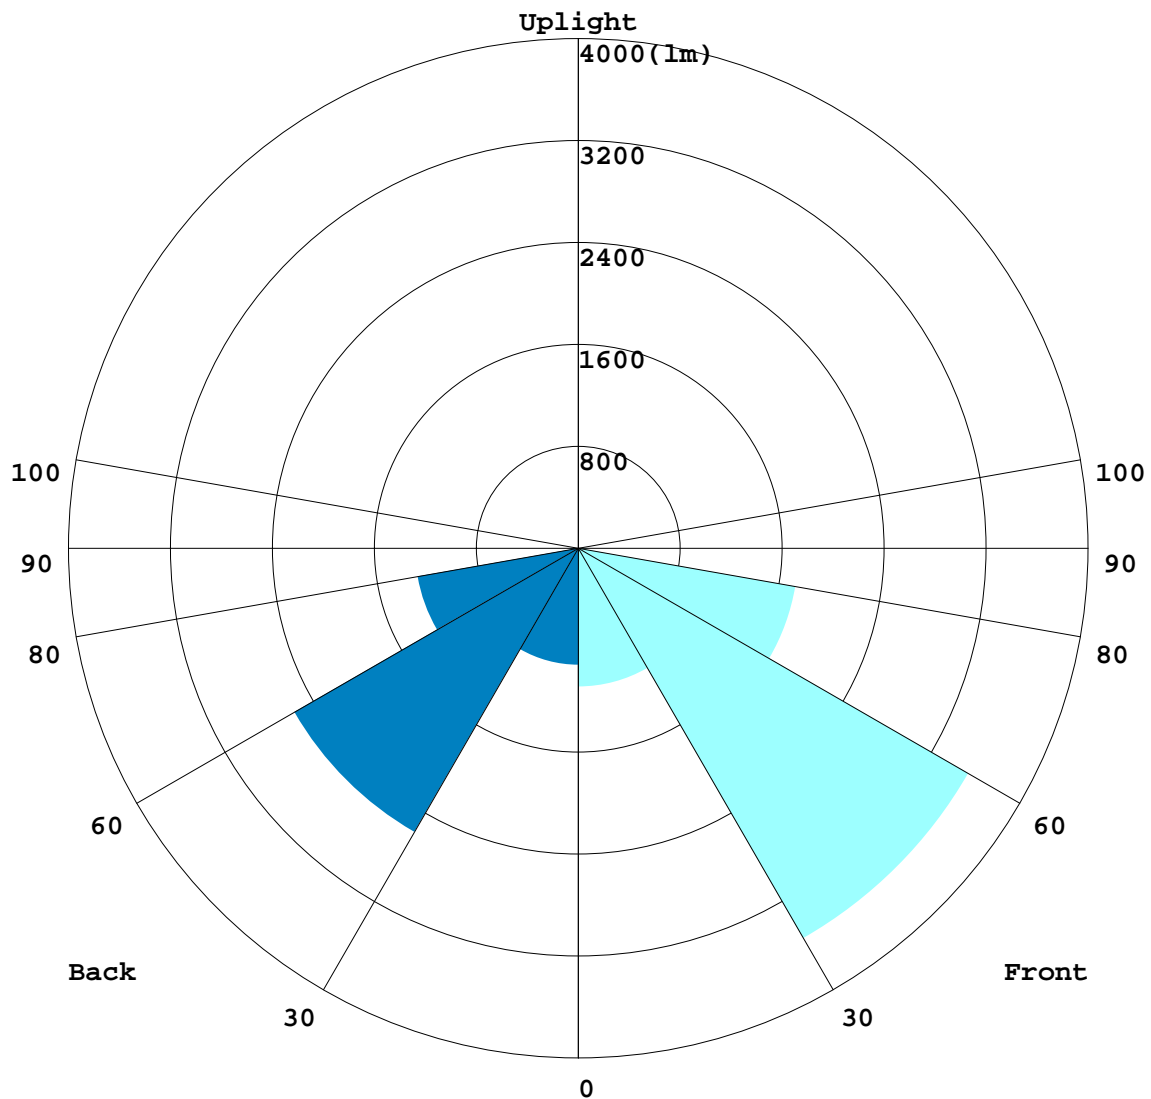

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:

### BUG REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

#### IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	1086.5	9.7
FM - Front-Medium(30-60)	3535	31.4
FH - Front-High(60-80)	1732.4	15.4
FVH - Front-Very High(80-90)	68.498	0.6
Total Forward Light	6422.3	57.1

BL - Back-Low(0-30)	915.08	8.1
BM - Back-Medium(30-60)	2571.5	22.9
BH - Back-High(60-80)	1279.4	11.4
BVH - Back-Very High(80-90)	61.854	0.5
Total Back Light	4827.8	42.9

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B3-U0-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	4827.8	0	4827.8
Street Side	6422.3	0	6422.3

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25


γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:



ROAD ISOCANDELA REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

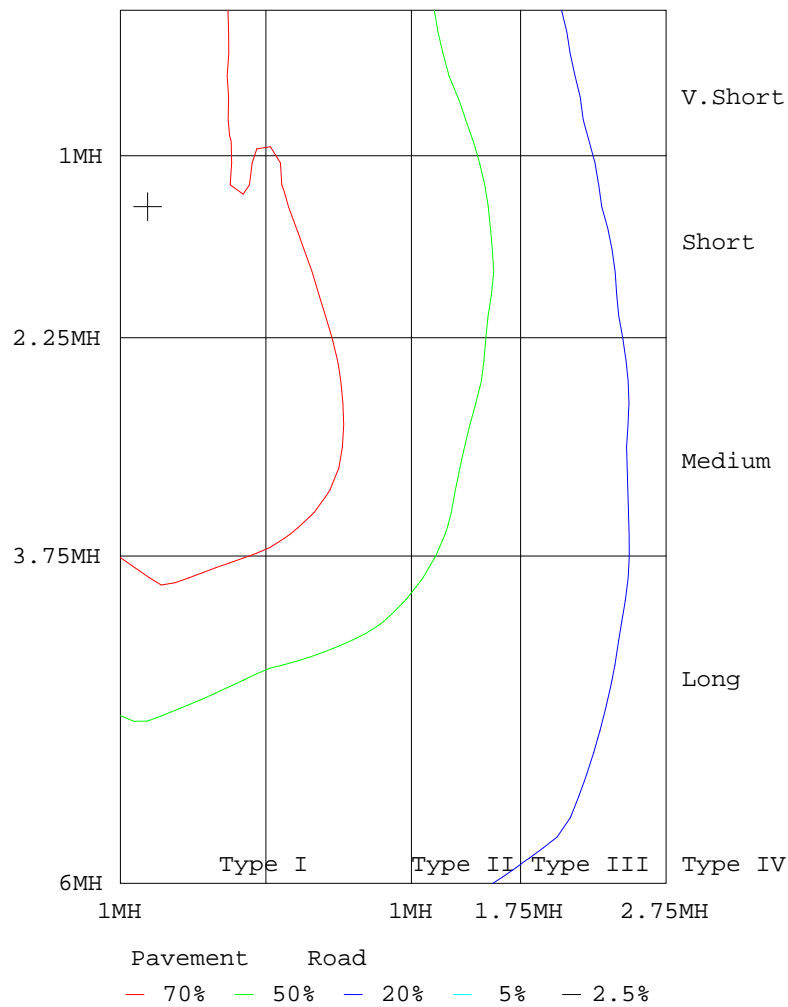

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017.11.25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.480m [K=1.0000]  
Remarks:



