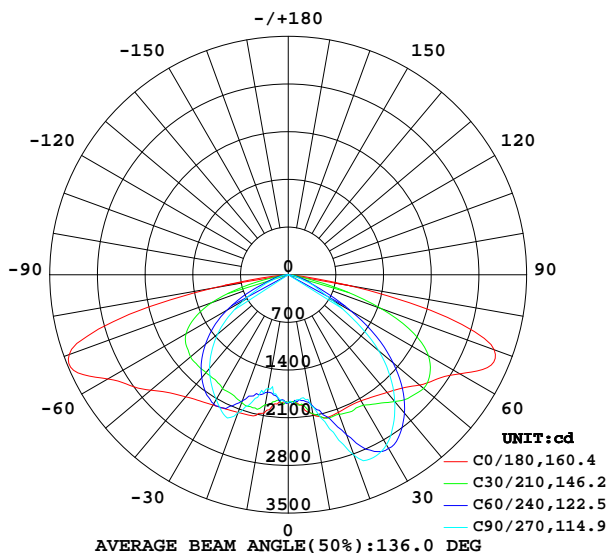
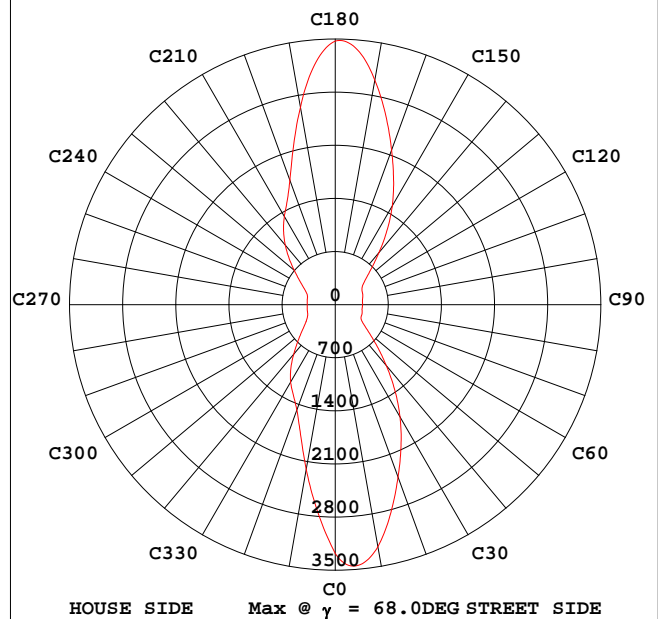


STREETLIGHT PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.00 lm/W			
MODEL	ZGSM-LD70LMA 2M 5050	Imax(cd)	3474	η street_up(%)	0.0
NOMINAL POWER(W)	70	LOR(%)	100.0	η street_down(%)	54.6
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	8750	η house_up(%)	0.0
NOMINAL FLUX(lm)	8750	MAXIMUM @(C, γ)	180,68.0	η house_down(%)	45.4
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	η down(%)	100.0	SLI	23.400


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANSMAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

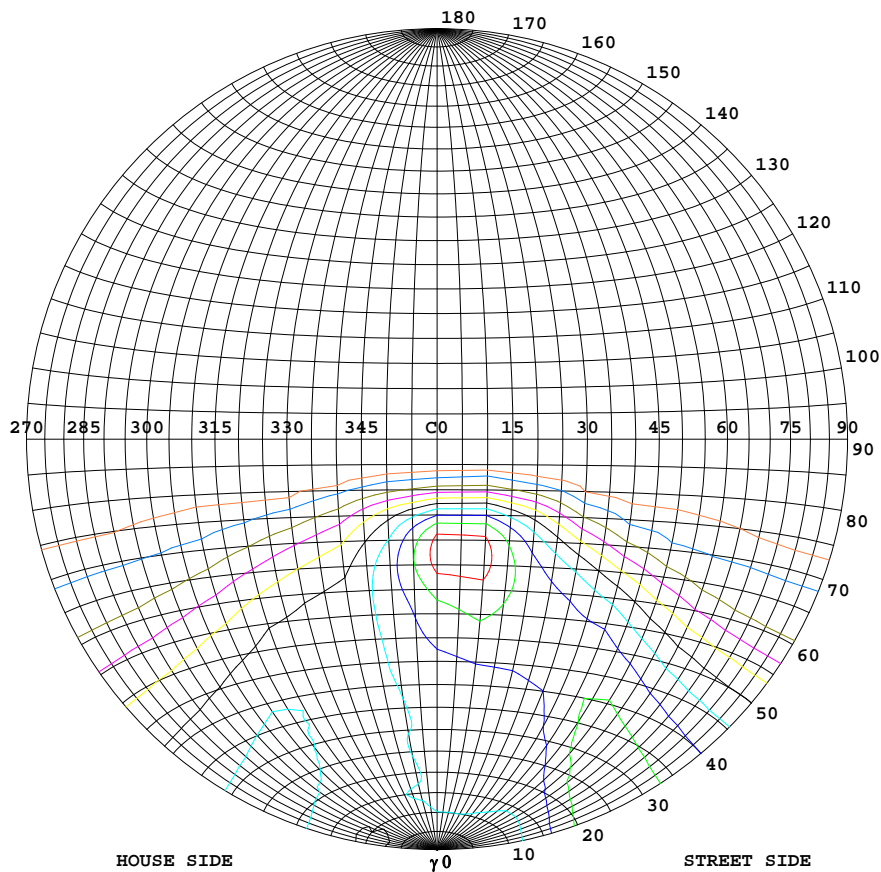



Classification:

IES:Type II - Medium
 CIE:Narrow - Intermediate
 IES:Semi cut-off
 CIE:Non-cut-off
 Max.At80:127.2cd/klm
 Max.At90:10.29cd/klm
 Max.80-90:127.2cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	3474
90%	3127
80%	2779
70%	2432
60%	2085
50%	1737
40%	1390
30%	1042
20%	695
10%	347
5%	174

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

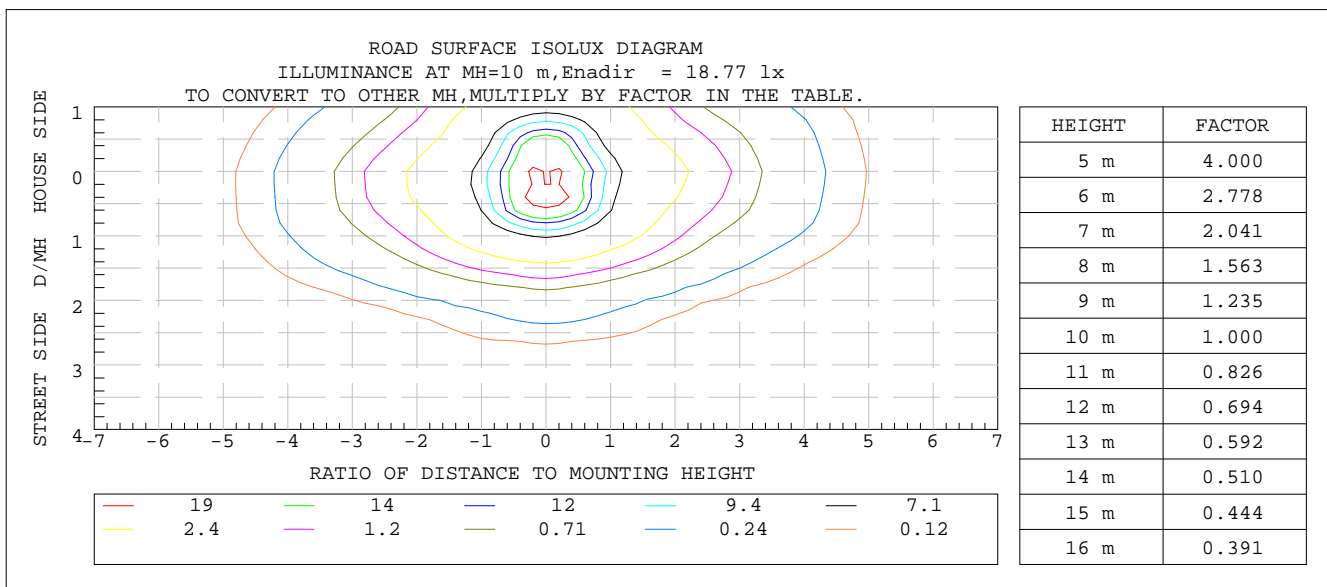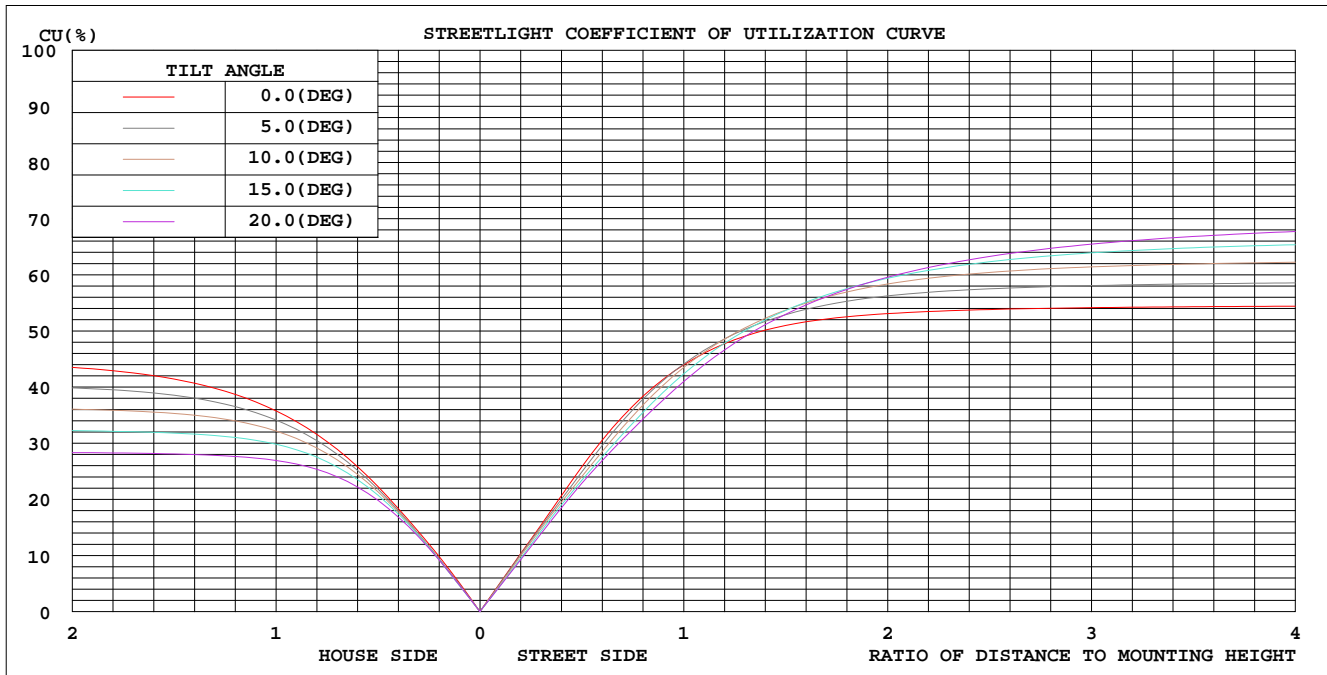COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	2080	2002	1956	1935	2064	1862	1694	1845	0- 10	178.9	178.9	2.04,2.04
20	2150	2241	2819	2301	2152	1925	2149	1925	10- 20	590.3	769.2	8.79,8.79
30	2137	2647	2884	2765	2210	2002	2117	2097	20- 30	1070	1839	21,21
40	2257	2788	2433	2789	2340	2043	1798	2065	30- 40	1447	3285	37.5,37.5
50	2519	2466	1735	2369	2637	1845	1353	1777	40- 50	1658	4944	56.5,56.5
60	2910	1716	743.6	1557	3059	1429	758.4	1295	50- 60	1633	6577	75.2,75.2
70	3217	606.7	241.0	529.4	3422	702.3	274.2	572.4	60- 70	1337	7914	90.4,90.4
80	886.5	113.9	59.14	116.9	1113	139.3	85.17	125.8	70- 80	735.9	8650	98.9,98.9
90	25.15	31.38	5.572	25.62	26.69	28.37	5.914	24.25	80- 90	100.1	8750	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

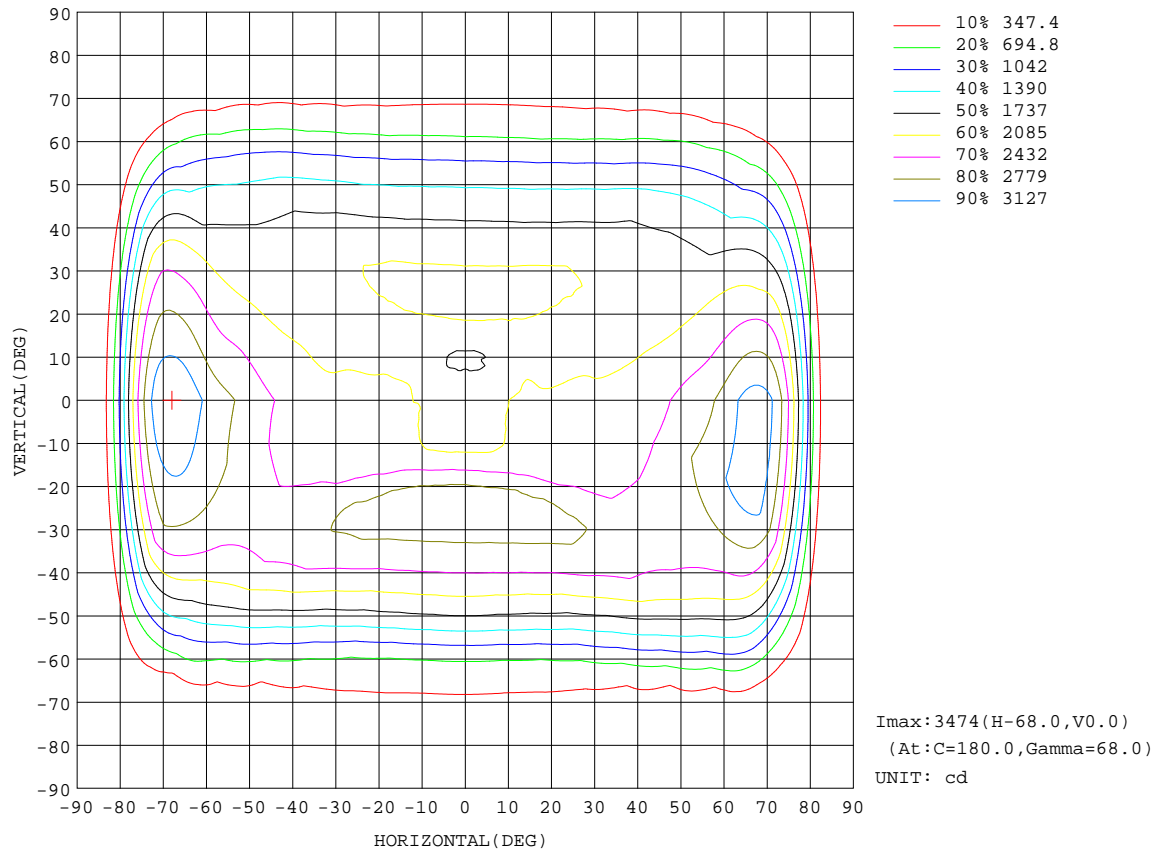

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

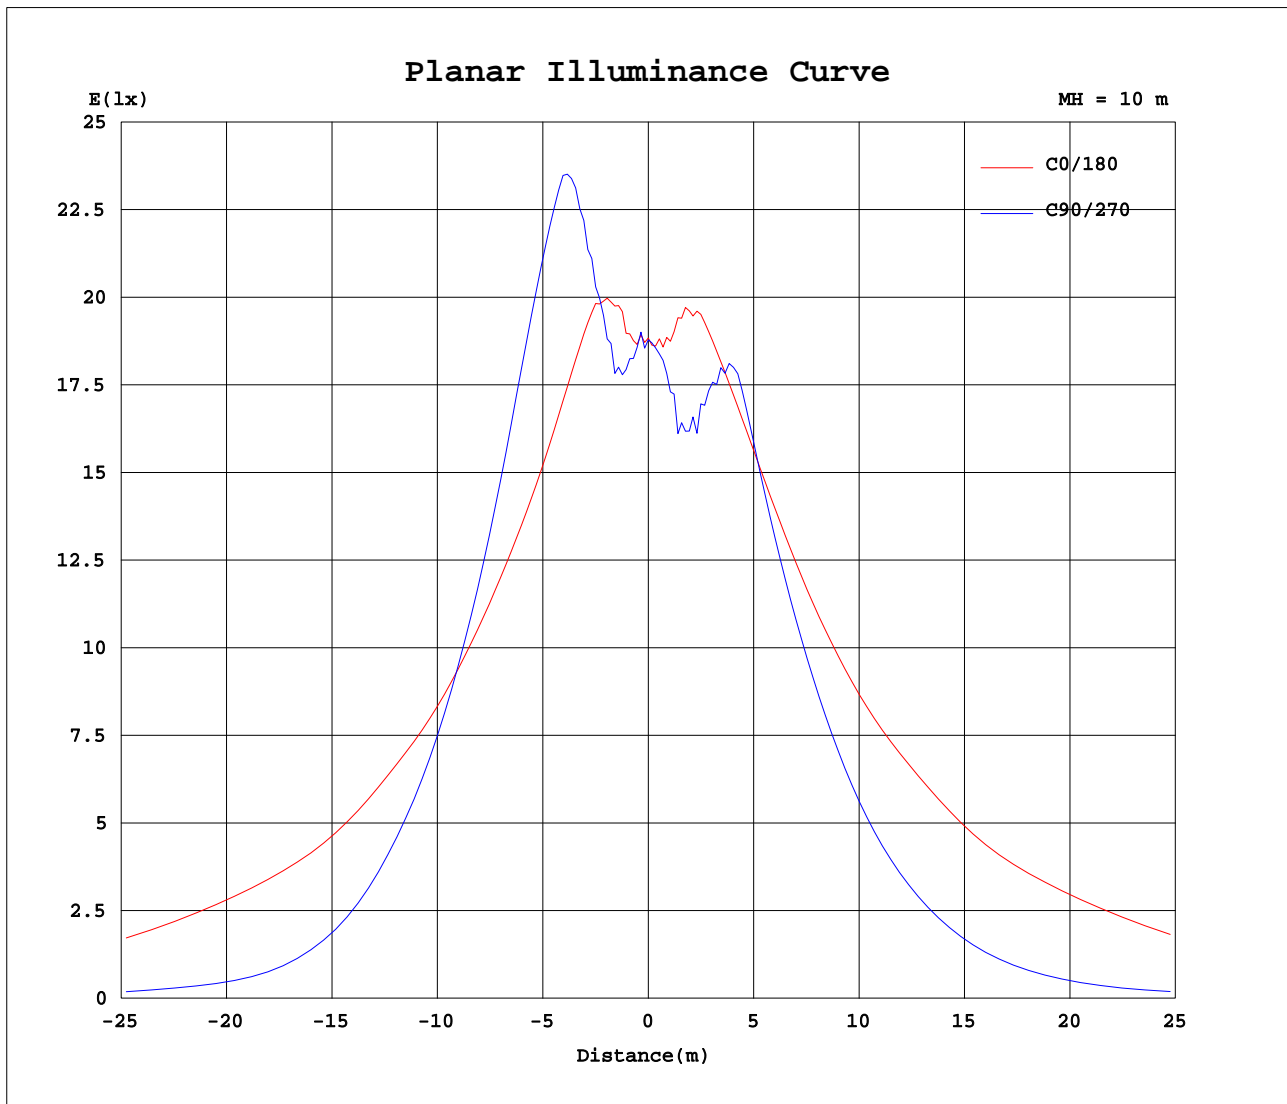


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

LCS REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

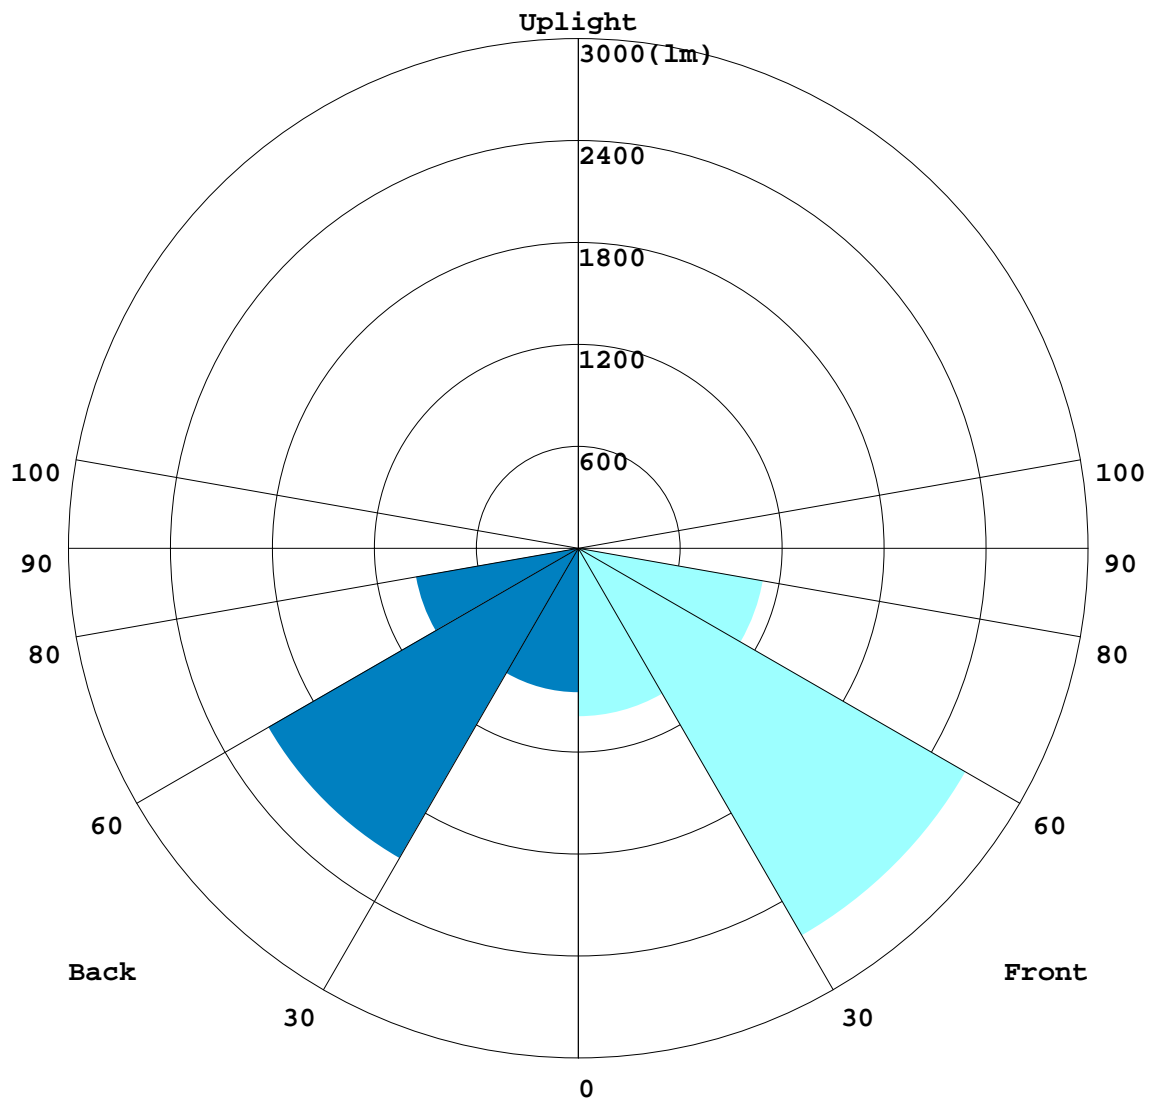

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

BUG REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	989.69	11.3
FM - Front-Medium(30-60)	2632.4	30.1
FH - Front-High(60-80)	1103.7	12.6
FVH - Front-Very High(80-90)	49.531	0.6
Total Forward Light	4775.3	54.6

BL - Back-Low(0-30)	849.12	9.7
BM - Back-Medium(30-60)	2105.9	24.1
BH - Back-High(60-80)	969.2	11.1
BVH - Back-Very High(80-90)	50.603	0.6
Total Back Light	3974.8	45.4

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B2-U0-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	3974.8	0	3974.8
Street Side	4775.3	0	4775.3


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

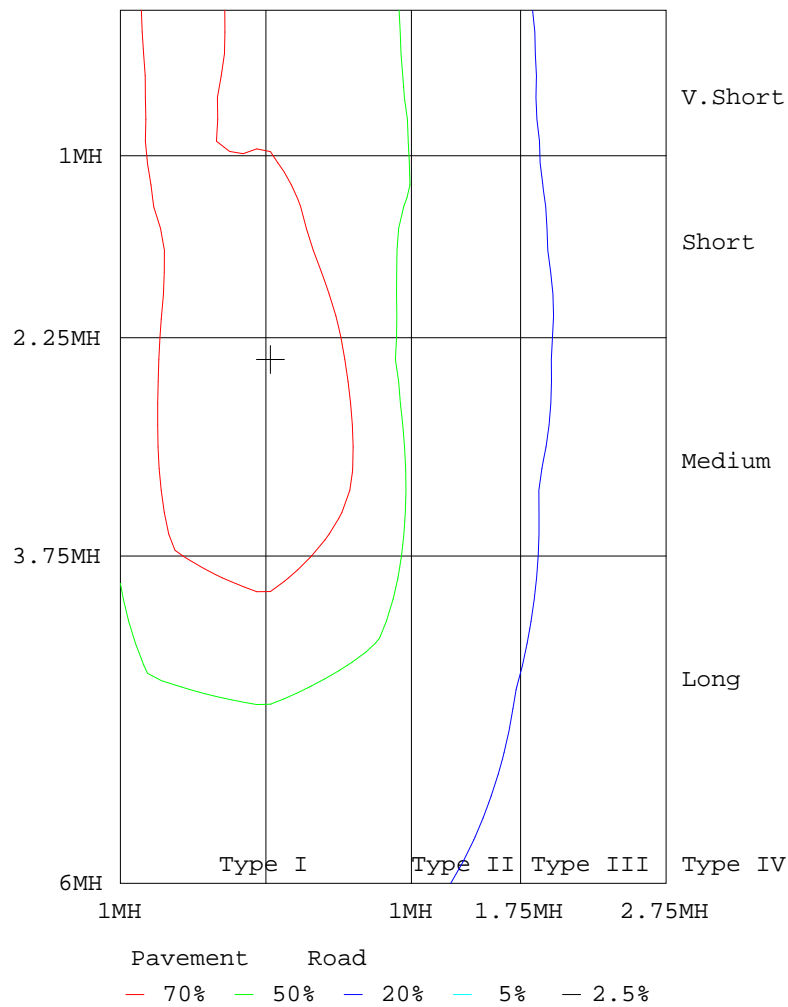

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.11.25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

